

# PRODUCT DATASHEET

## HB SEN P 147W 840 110DEG IP65

HIGH BAY SENSOR GEN 4 | High-bay luminaires in IP65 with high frequency sensor



PERFOR-  
MANCE  
CLASS

### Areas of application

- Replacement for high bay luminaires with mercury vapor or metal halide lamps
- Warehouses
- Logistics halls
- Industry
- High ceiling (e.g. in shopping malls, airports, commercial buildings, lobbies)

### Product benefits

- Multiple adjustments of sensor range, daylight detection and hold time
- High luminous efficacy
- Energy savings of up to 64 % compared to conventional high bay luminaires
- 5 years guarantee
- Suitable for use in dusty and damp locations thanks to high IP rating

### Product features

- High frequency sensor for daylight and motion detection
- Different luminous flux and beam angle for mounting heights of ~ 6 m to 10 m in 4000 K




---

**TECHNICAL DATA****Electrical data**


|                                                             |               |
|-------------------------------------------------------------|---------------|
| Nominal wattage                                             | 147.00 W      |
| Nominal voltage                                             | 220...240 V   |
| Mains frequency                                             | 50...60 Hz    |
| Nominal current                                             | 660 mA        |
| Inrush current                                              | 48.8 A        |
| Inrush current time $T_{h50}$                               | 368 $\mu$ s   |
| Max. number of luminaires per miniature circuit breaker B16 | 4             |
| Max. number of luminaires per miniature circuit breaker C10 | 4             |
| Max. number of luminaires per miniature circuit breaker C16 | 6             |
| Power factor $\lambda$                                      | > 0.95        |
| Total harmonic distortion                                   | < 20 %        |
| Protection class                                            | I             |
| Operating mode                                              | Mains voltage |

**Photometrical data**

|                                      |            |
|--------------------------------------|------------|
| Luminous flux                        | 22000 lm   |
| Luminous efficacy                    | 150 lm/W   |
| Color temperature                    | 4000 K     |
| Light color (designation)            | Cool White |
| Color rendering index Ra             | $\geq 80$  |
| Standard deviation of color matching | < 5 sdcm   |
| Low flicker                          | Yes        |
| Beam angle                           | 110 °      |
| UGR                                  | $\leq 29$  |

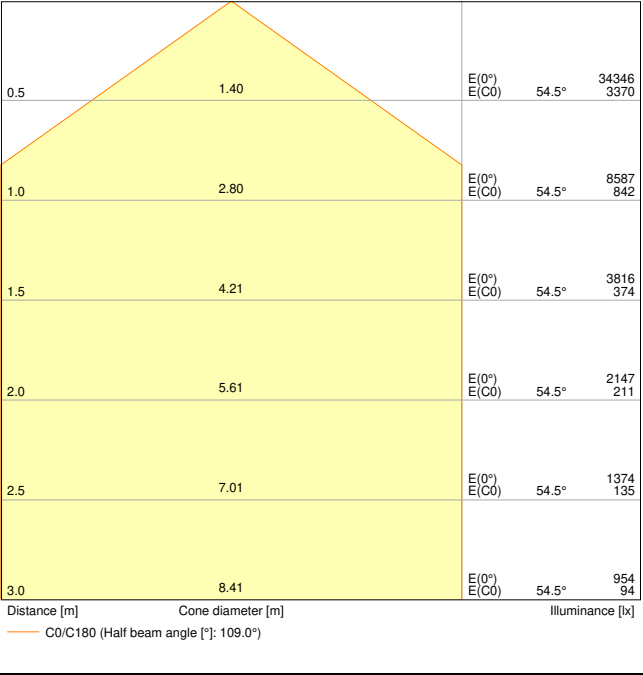


LDC typ cone

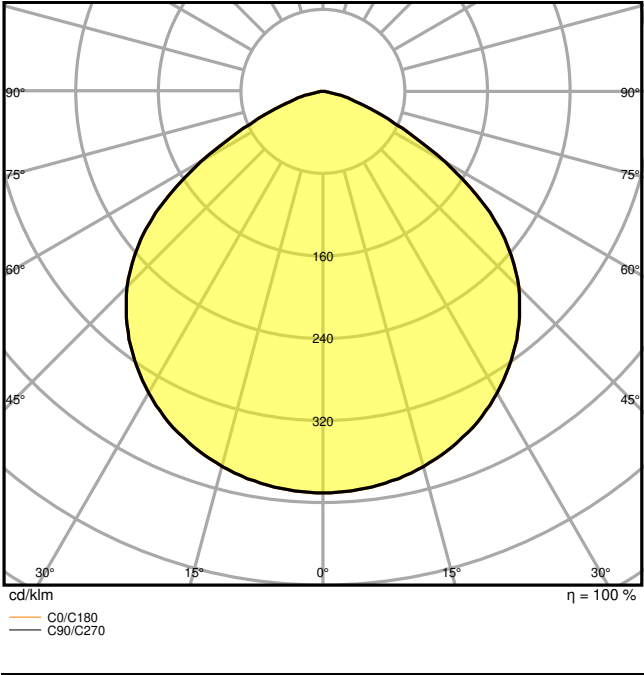

LDC typ polar

Dimensions & Weight

|                |           |
|----------------|-----------|
| Diameter       | 321.00 mm |
| Height         | 188.00 mm |
| Product weight | 2570.00 g |
| Cable length   | 1500 mm   |



Materials & Colors

|                                            |                    |
|--------------------------------------------|--------------------|
| Product color                              | Black              |
| Housing color                              | Black              |
| Body material                              | Aluminum           |
| Cover material                             | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 850 °C             |
| Mercury content                            | 0.0 mg             |

### Application & Mounting

|                                        |                   |
|----------------------------------------|-------------------|
| Ambient temperature range              | -20...+50 °C      |
| Temperature range at storage           | -40...+70 °C      |
| Type of connection                     | Cables            |
| Type of protection                     | IP65              |
| Protection class IK (shock resistance) | IK08              |
| Dimmable                               | No                |
| Mounting type                          | Surface/Suspended |
| Mounting location                      | Ceiling / Wall    |
| Application environment                | Indoor            |
| LED module replaceable                 | Not replaceable   |
| With light source                      | Yes               |

### Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 80000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 50000 h <sup>1)</sup> |
| Lifespan L90/B10 at 25 °C  | 35000 h               |
| Number of switching cycles | 200000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

|                             |        |
|-----------------------------|--------|
| ECG - Output ripple current | < 10 % |
|-----------------------------|--------|

### Sensor

|                                  |                |
|----------------------------------|----------------|
| Type of sensor                   | Motion / Light |
| Sensor technology                | Microwave      |
| Sensor detection angle           | < 150 °        |
| Sensor controlled switching time | 30s...10 min   |
| Detection range of motion sensor | 6...15 m       |

|                                        |        |
|----------------------------------------|--------|
| Detection threshold of daylight sensor | 100 lx |
|----------------------------------------|--------|

### Certificates & Standards

|                                                      |                                |
|------------------------------------------------------|--------------------------------|
| Standards                                            | CE / CB / ENEC / TÜV SÜD / EAC |
| Luminaire with limited surface temperature, "D sign" | Yes                            |
| Ball shot safe                                       | No                             |

### EQUIPMENT / ACCESSORIES

- Sensor, mounting hook and mounting bracket included
- Reflectors, refractors and remote control available as separate accessory

### DOWNLOAD DATA

| Documents and certificates                                                          |                                 |
|-------------------------------------------------------------------------------------|---------------------------------|
|     | User instruction                |
|    | Addon Technical Information     |
|   | Packaging insert                |
|   | Declarations Of Conformity CE   |
|   | Declarations Of Conformity UKCA |
|   | Certificates                    |
| Photometric and lighting design files                                               |                                 |
|  | IES file (IES)                  |
|  | LDT file (Eulumdat)             |
|  | ULD file (DIALux)               |
|   | ROLF file (RELUX)               |
|  | UGR file (UGR table)            |
|   | LDC typ cone                    |


| Photometric and lighting design files                                             |                  |
|-----------------------------------------------------------------------------------|------------------|
|  | LDC typ polar    |
| Tender texts                                                                      |                  |
|  | Tender documents |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume    |
|---------------|------------------------------|--------------------------------------|--------------|-----------|
| 4058075603264 | Shipping box<br>1            | 368 mm x 368 mm x 168 mm             | 3223.00 g    | 22.75 dm³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.