

PRODUCT DATASHEET ENDURA Classic Cannon Wall UpDown GU10

ENDURA® CANNON | GU10 socketed luminaires with contemporary shape and light outlet up and down



Areas of application

- Building facades
- Entrance lighting
- Patios, balconies
- Pathway lighting
- Driveways

Product benefits

- High flexibility in the choice of the light source thanks to GU10 socket
- Easy and quick installation

Product features

- Indirect illumination
- Housing material: aluminum
- Housing color: RAL 7016
- Type of protection: IP44



TECHNICAL DATA

Electrical data


Nominal voltage	220240 V
Mains frequency	5060 Hz
Protection class	T.
Operating mode	Mains voltage

Photometrical data


Photobiological safety group acc. to EN62778	RG1
Photobiological safety group acc. to EN62471	RG0

Dimensions & Weight

Length	105.00 mm
Width	75.00 mm
Height	180.00 mm
Product weight	566.00 g

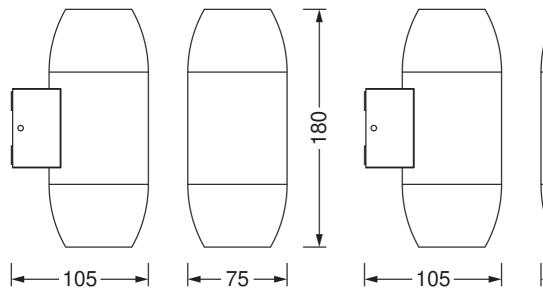

Product line drawing with numbers



Product line drawing with numbers

Materials & Colors

Product color	Dark gray
Housing color	Dark gray
Body material	Aluminum
Cover material	Glass
Mercury content	0.0 mg

Application & Mounting

Type of connection	Terminal, 3-Pole (L, N, PE)	
Type of protection	IP44	
Protection class IK (shock resistance)	IK03	
Dimmable	No	
Mounting type	Surface	
Mounting location	Wall	
Application environment	Outdoor	
With light source	No	
Holder designation	GU10	

Emergency lighting

Type of emergency light operation	Non-maintained	
Luminous flux in maintained operation mode	-	
Luminous flux in emergency operation mode	-	

Certificates & Standards

Standards	CE / EAC / UKCA
Luminaire with limited surface temperature, "D sign"	No

Additional product data

Product remark	Maximum bulb wattage: 2 x 35 W
Number of illuminants	1

EQUIPMENT / ACCESSORIES

- Complete mounting and connecting accessories included
- No light sources included

DOWNLOAD DATA

	Documents and certificates
PDF	User instruction
PDF	Packaging insert
PDF	Declarations Of Conformity CE
PDF	Declarations Of Conformity UKCA

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075554498	Folding box 1	80 mm x 110 mm x 190 mm	616.00 g	1.67 dm³
4058075554504	Shipping box 4	245 mm x 180 mm x 215 mm	2739.00 g	9.48 dm³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.