

SPACING TABLE 1 HOUR EMERGENCY DURATION

SERIE 770 SEPTAGEM-U LOW BAY




Luminous flux: 509lm

Emergency lighting factor: 1.00

Emergency luminous flux: 509lm



HBI Bisscheroux bv, 770 Septagem / low bay (polair)

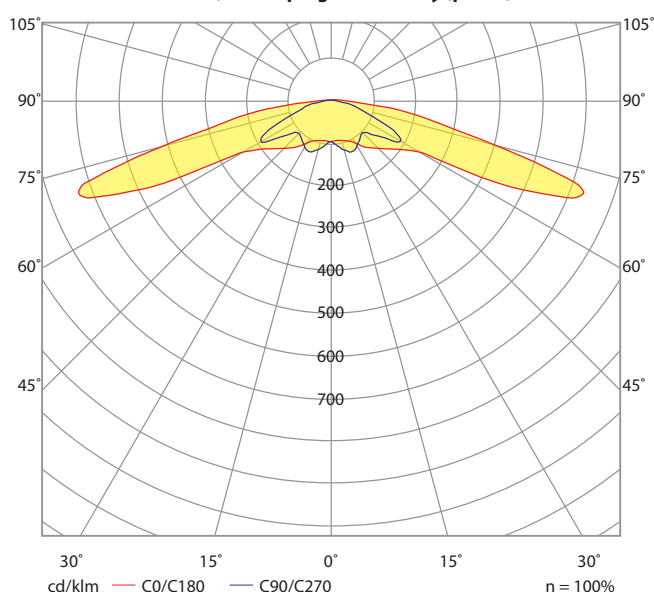

Code no.:

- 7UYo4o4W
- 7UYo4o4WA
- 7UYo4o4B
- 7UYo4o4BA

1 lux - 1 hour duration - low bay

Mounting height (meters)	Corridor	Corridor	Corridor	Open area	Open area
2.50	8.2	19.0	15.6	12.3	5.3
3.00	9.1	21.2	17.4	13.6	5.7
3.50	9.8	23.1	18.9	14.8	6.0
4.00	10.0	25.0	20.4	15.8	5.2
4.50	6.3	24.2	18.2	16.2	4.4
5.00	5.8	23.7	18.0	15.6	4.2
6.00	4.5	18.4	15.7	12.9	3.9
7.00	0.5	16.5	13.8	12.0	3.3