



NVENT CADDY KABELHOUDER MET FUNCTIE-BEHOUD, METAAL, 30 KABELS

CATALOG NUMBER

KLICK30



nVent CADDY Fire-Rated Cable Holder, Metal is a versatile bracket designed to support medium-sized cable bundles in crowded spaces, such as above suspended ceilings. Compatible with traditional anchoring and direct fastening for both wall and ceiling mounts, it presents a unique, tool-free closing mechanism that can be operated safely from the ground without a ladder or lift—ultimately saving contractors time on the job. Featuring a short profile design and compliance to DIN 4102-12, this cable holder is an ideal solution for electrical and datacom applications.

FEATURES

E30-E90 classification according to DIN 4102-12

Compatible with direct fastening and traditional anchoring

Requires only one nail per holder

Reusable in case of nail misfire

Unique closing mechanism which can be safely operated from the ground

Afgeronde hoeken helpen beschadiging van de kabel te voorkomen

Ready to use out of the box

Made of 100% recyclable materials

PRODUCTKENMERKEN

Article Number: 182062

Material: Staal

Finish: Vooraf gegalvaniseerd

Hole Size 1: 4,8 mm

Hole Size 2: 7,4 mm

Hole Size 3: 11 mm

Length: 70 mm

Height: 47 mm

Width: 40 mm

Cable Capacity: 30

ADDITIONAL PRODUCT DETAILS

Cable capacity based on a 9mm diameter cable.

*Fire resistance class R30-R120 for design of anchorages under exposure to fire.

Products tested on actual concrete slab, according to the latest MPA test instructions at the time of the test.

Refer to the AbP for more details.

Brandbaarheidstest uitgevoerd met de vermelde kabeltypes. Gelijkwaardige halogeenvrije veiligheidskabel kan volgens de nationale richtlijnen worden gebruikt.

E30 Capaciteit brandwerende datakabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ³
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E30 max. 225 V n ² x2x0,8	
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E30 max. 225 V n ² x2x0,8	
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
KLICK30	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E30 max. 225 V n ² x2x0,8	
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 17 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E30 max. 225 V n ² x2x0,8	
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		¹ n ≤ 32 ² n ≤ 52 ³ Allowed load for a spacing between holders ≤ 0.6m		

E60 Capaciteit brandwerende voedingskabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ⁵
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
		X-P 17 B3 MX	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
		X-P 20 B3 MX	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
		Wall	EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	3
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
KLICK30	Ceiling	Fire-rated Anchor*	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 2,5 RE	4
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
		X-P 17 B3 MX	EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	4
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
		X-P 20 B3 MX	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 2,5 RE	4
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
	Wall ⁴	Fire-rated Anchor*	EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	3

¹ n ≤ 30

² n ≤ 24

³ n ≤ 12

⁴ Vertical mount – Installed with opening facing up

⁵ Allowed load for a spacing between holders ≤ 0.6m

E30 Capaciteit brandwerende voedingskabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ⁵
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 2,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
		X-P 17 B3 MX	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 2,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
		X-P 20 B3 MX	BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E30-E60 S 0,6/1kV n ¹ x 2,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	
	Wall	Fire-rated Anchor*	EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	3
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 1,5 RE	
			Keram (N)HXH-J FE180 E30-E60 0,6/1 kV n ¹ x 2,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE	
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	




E30 Capaciteit brandwerende voedingskabel					
KLICK30	Ceiling	Fire-rated Anchor*	BETAflam® (N)HXH-J FE180 / E30–E60 S 0,6/1kV n ¹ x 1,5 RE	4	
			BETAflam® (N)HXH-J FE180 / E30–E60 S 0,6/1kV n ¹ x 2,5 RE		
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE		
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE		
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE		
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE		
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE		
		X-P 17 B3 MX	EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE	4	
			EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE		
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE		
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE		
			X-P 20 B3 MX	BETAflam® (N)HXH-J FE180 / E30–E60 S 0,6/1kV n ¹ x 1,5 RE	4
				BETAflam® (N)HXH-J FE180 / E30–E60 S 0,6/1kV n ¹ x 2,5 RE	
				EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	
	EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ¹ x 1,5 RE				
	EUCASAFE® (N)HXH FE 180 E90 0,6/1 kV n ³ x 2,5 RE				
	Keram (N)HXH-J FE180 E90 0,6/1 kV n ² x 1,5 RE				
	Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE				
KLICK30	Wall ⁴	Fire-rated Anchor*	EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 1,5 RE	3	
			EUCASAFE® (N)HXH FE 180 E30 - E60 0,6/1 kV n ¹ x 2,5 RE		
			Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE		
¹ n ≤ 30 ² n ≤ 24 ³ n ≤ 12 ⁴ Vertical mount – Installed with opening facing up ⁵ Allowed load for a spacing between holders ≤ 0.6m					

E60 Capaciteit brandwerende datakabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ³
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
KLICK30	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 17 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
1 n ≤ 32 2 n ≤ 52 3 Allowed load for a spacing between holders ≤ 0.6m				

E90 Capaciteit brandwerende voedingskabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ⁴
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
		X-P 17 B3 MX	BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ¹ x 1,5 RE	3
			BETAflam® (N)HXH-J FE180 / E90 0,6/1kV n ² x 2,5 RE	
	Wall	Anchor	Keram (N)HXH-J FE180 E90 0,6/1 kV n ³ x 2,5 RE	3
¹ n ≤ 30 ² n ≤ 24 ³ n ≤ 12 ⁴ Allowed load for a spacing between holders ≤ 0.6m				

E90 Capaciteit brandwerende datakabel				
Referentienummer	Mount	Fastener	Kabel	kg/m ³
KLICK15	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ¹ x2x0,8	2
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
KLICK30	Ceiling	Fire-rated Anchor*	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 17 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
		X-P 20 B3 MX	BETAflam® JE-H(St)HRH FE180 / E30–E90 n ² x2x0,8	3
			EUCASAFE® JE-H(St)H...Bd FE 180 E90 max. 225 V n ² x2x0,8	
1 n ≤ 32 2 n ≤ 52 3 Allowed load for a spacing between holders ≤ 0.6m				

DIAGRAMS

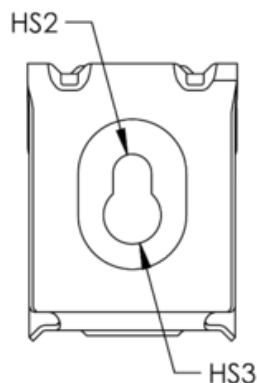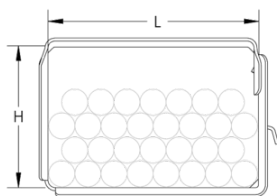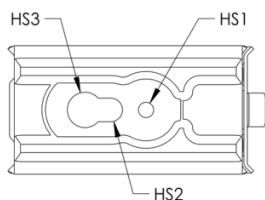

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. U kunt de productinformatiebladen downloaden van www.nvent.com of opvragen bij uw nVent-klantenservice. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.

Noord-Amerika

+1.800.753.9221
Option 1 – Customer Care
Option 2 – Technical Support

Europa

Netherlands:
+31 800-0200135
France:
+33 800 901 793

Europa

Germany:
800 1890272
Other Countries:
+31 13 5835404

APAC

Shanghai:
+ 86 21 2412 1618/19
Sydney:
+61 2 9751 8500



nVent.com

Our powerful portfolio of brands:

TRACER

CADDY ERICO HOFFMAN RAYCHEM SCHROFF