

# PRODUCT DATASHEET

## DL UGR19 PFM DN155 14 W 830 WT IP54

DOWNLIGHT UGR19 | Low-glare downlights, suitable for computer screen workstations



PERFOR-  
MANCE  
CLASS

### Areas of application

- Suitable for office applications, especially for computer screen workplaces
- Direct replacement for luminaires with compact fluorescent lamps
- Entrances / Hallways
- Bathrooms, kitchens and sheltered outdoor areas
- General illumination

### Product benefits

- Good glare reduction ( $UGR < 19$ ) and cut off angle up to  $30^\circ$  for comfortable indoor lighting
- Easy and quick installation thanks to connector box with 5-pole toolless terminal
- Low flicker light
- Suitable for use in dusty and damp locations thanks to high IP rating
- 5 years guarantee

### Product features

- Housing material: Aluminum mirror-finished reflector
- Type of protection: IP54 (room side) / IP20 (back side)
- Connector box with push wire terminal for tool-free connection
- Through-wiring possible
- Luminaire versions with IoT-ready DALI-2 driver or IoT Zigbee 3.0 technology available




## TECHNICAL DATA

## Electrical data


|                                                             |                     |
|-------------------------------------------------------------|---------------------|
| Nominal wattage                                             | 14.00 W             |
| Nominal voltage                                             | 220...240 V         |
| Mains frequency                                             | 50...60 Hz          |
| Nominal current                                             | 120 mA              |
| Inrush current                                              | 20 A                |
| Inrush current time $T_{h50}$                               | 200 $\mu$ s         |
| Max. number of luminaires per miniature circuit breaker B16 | 120                 |
| Max. number of luminaires per miniature circuit breaker C10 | 80                  |
| Max. number of luminaires per miniature circuit breaker C16 | 120                 |
| Power factor $\lambda$                                      | $\geq 0.90$         |
| Total harmonic distortion                                   | < 15 %              |
| Protection class                                            | II                  |
| Operating mode                                              | External LED driver |

## Photometrical data

|                                              |                           |
|----------------------------------------------|---------------------------|
| Luminous flux                                | 1500 lm                   |
| Luminous efficacy                            | 105 lm/W                  |
| Color temperature                            | 3000 K                    |
| Light color (designation)                    | Warm White                |
| Color rendering index Ra                     | $\geq 80$                 |
| Standard deviation of color matching         | $\leq 5$ sdc <sub>m</sub> |
| Luminous intensity                           | -                         |
| Low flicker                                  | Yes                       |
| Flickering metric (Pst LM)                   | -                         |
| Stroboscope effect metric (SVM)              | -                         |
| Photobiological safety group acc. to EN62778 | RG1                       |
| Photobiological safety group acc. to EN62471 | RG0                       |
| Beam angle                                   | 65 °                      |
| UGR                                          | < 19                      |

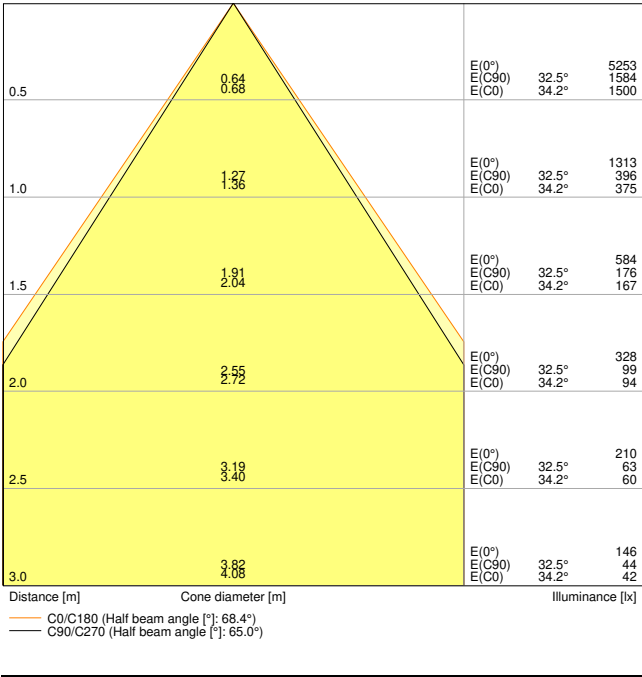


LDC typ cone

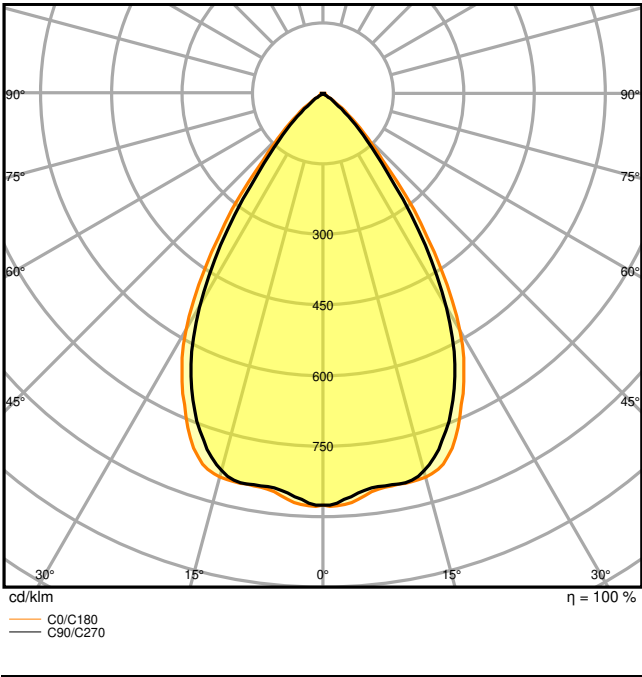

LDC typ polar

Dimensions & Weight

|                |           |
|----------------|-----------|
| Diameter       | 180.00 mm |
| Height         | 65.00 mm  |
| Product weight | 650.00 g  |

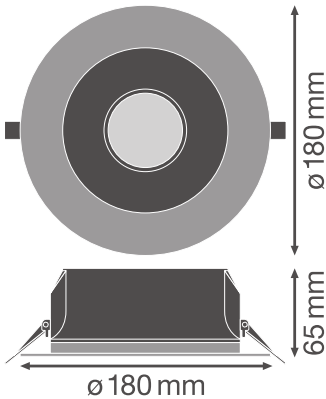

## Materials & Colors

|                                            |                    |
|--------------------------------------------|--------------------|
| Product color                              | White              |
| Housing color                              | White              |
| Body material                              | Aluminum           |
| Cover material                             | Polycarbonate (PC) |
| Light emitting surface material            | Polycarbonate (PC) |
| Glow Wire Test according to IEC 60695-2-12 | 650 °C             |
| Mercury content                            | 0.0 mg             |

## Application & Mounting

|                                        |                    |
|----------------------------------------|--------------------|
| Ambient temperature range              | -20...+45 °C       |
| Temperature range at storage           | -40...+70 °C       |
| Type of connection                     | Screwless terminal |
| Type of protection                     | IP54/IP20          |
| Protection class IK (shock resistance) | IK03               |
| Dimmable                               | No                 |
| Mounting type                          | Recessed           |
| Mounting location                      | Ceiling            |
| Application environment                | Indoor             |
| Mounting diameter                      | 155,0 mm           |
| Mounting depth                         | 100 mm             |
| LED module replaceable                 | Not replaceable    |
| With light source                      | Yes                |

## Lifespan

|                            |                       |
|----------------------------|-----------------------|
| Lifespan L70/B50 at 25 °C  | 70000 h <sup>1)</sup> |
| Lifespan L80/B10 at 25 °C  | 60000 h <sup>1)</sup> |
| Lifespan L90/B10 at 25 °C  | 40000 h               |
| Number of switching cycles | 100000                |

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

## Control gear

|                             |          |
|-----------------------------|----------|
| Output current              | 450 mA   |
| ECG - Output ripple current | < 10 %   |
| ECG - Length                | 114.0 mm |
| ECG - Width                 | 45 mm    |

|                          |                                   |
|--------------------------|-----------------------------------|
| ECG - Height             | 28 mm                             |
| Recommended control gear | OSRAM OTI DALI 50/220-240/1A4 NFC |

Certificates & Standards

|                                                      |                                |
|------------------------------------------------------|--------------------------------|
| Standards                                            | CE / CB / ENEC / TÜV SÜD / EAC |
| Luminaire with limited surface temperature, "D sign" | No                             |
| Ball shot safe                                       | No                             |

Additional product data

|                       |              |
|-----------------------|--------------|
| Number of illuminants | Not relevant |
|-----------------------|--------------|

EQUIPMENT / ACCESSORIES

– External control gear included

DOWNLOAD DATA

| Documents and certificates                                                         |                                 |
|------------------------------------------------------------------------------------|---------------------------------|
|  | User instruction                |
|  | Addon Technical Information     |
|  | Packaging insert                |
|  | Declarations Of Conformity CE   |
|  | Declarations Of Conformity UKCA |
| Photometric and lighting design files                                              |                                 |
|  | IES file (IES)                  |
|  | LDT file (Eulumdat)             |
|  | ULD file (DIALux)               |
|  | ROLF file (RELUX)               |

Photometric and lighting design files

|                                                                                   |                      |
|-----------------------------------------------------------------------------------|----------------------|
|  | UGR file (UGR table) |
|   | LDC typ cone         |
|   | LDC typ polar        |

CAD/BIM files


|                                                                                  |              |
|----------------------------------------------------------------------------------|--------------|
|  | BIM_Revit_3D |
|  | CAD_STEP_3D  |

LOGISTICAL DATA

| Product code  | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume                 |
|---------------|------------------------------|--------------------------------------|--------------|------------------------|
| 4058075459137 | Folding box<br>1             | 215 mm x 84 mm x 219 mm              | 850.00 g     | 3.96 dm <sup>3</sup>   |
| 4058075459144 | Shipping box<br>24           | 526 mm x 449 mm x 468 mm             | 21806.00 g   | 110.53 dm <sup>3</sup> |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION

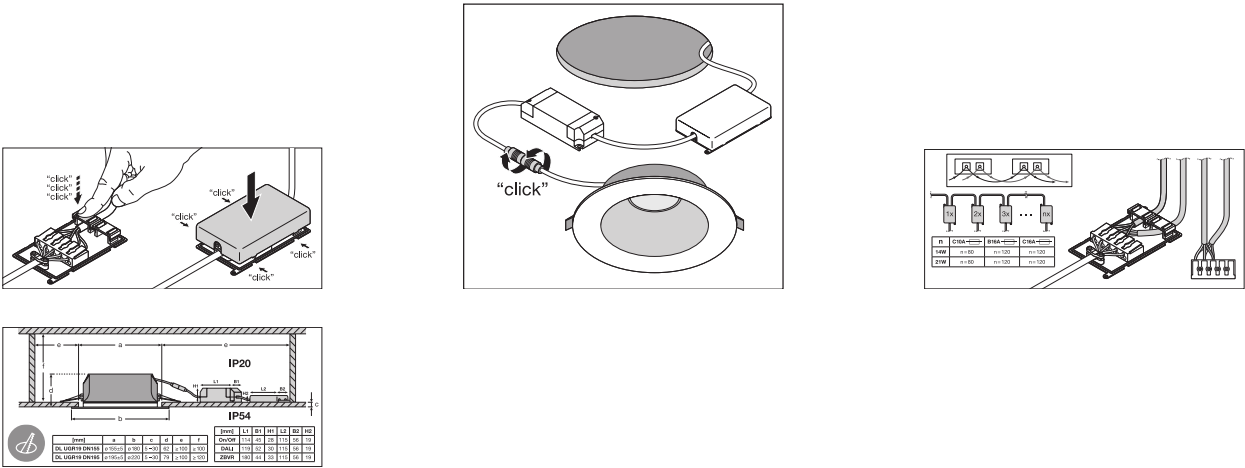

References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.