

PROLUMIA®

PRO-OFFICE SURFACE-MOUNTED AND GRID-CEILING RECESSED LUMINAIRES

NEW GENERATION,
EQUIPPED WITH MODERN
TECHNOLOGY AND
INNOVATIVE FEATURES

VERSATILE LUMINAIRES
WITH A CLASSIC LOOK, EQUIPPED
WITH CONTEMPORARY TECHNOLOGY
AND INNOVATIVE FEATURES





PRO-OFFICE SURFACE-MOUNTED AND GRID-CEILING RECESSED LUMINAIRES

VERSATILE LUMINAIRES WITH A CLASSIC LOOK, EQUIPPED WITH CONTEMPORARY TECHNOLOGY AND INNOVATIVE FEATURES

The Pro-Office luminaire retains its traditional look, but beneath the surface it has been completely renewed. Aside from the added features including the improved luminous efficacy and a significantly extended service life, new options such as the preferred light color option and the 4-step adjustable light settings, make the luminaire flexible and versatile. Pro-Office is the ideal replacement for T5/T8 fluorescent panels and also meets the lighting requirements for workstations. The renewed Pro-Office delivers in terms of energy efficiency and visual comfort and therefore also provides an excellent solution for general lighting in new-construction projects.

MORE INFO ABOUT
PRO-OFFICE ONLINE:



FEATURES & CHARACTERISTICS

- Universal surface-mounted versions in three formats
- Recessed versions for suspended grid-ceilings available in 2 sizes
- Complies lighting requirements for indoor work places (UGR < 19)
- Significantly improved luminous efficacy, now up to 125 lm/W
- Luminous flux/energy consumption adjustable in 4 settings
- Light color can be personalized according to preference - 3000, 3500 or 4000 K
- Recessed versions come a GST18/3-socket as a standard
- Complete GST18/3 plug & play wiring system separately available



GENERAL SPECIFICATIONS

Fixture type	Surface-mounted, recessed LED-panel
Application	(False) ceilings
Installation environment	Indoor
Lighting function	General Lighting
Luminaire versions	Standard, optionally dimmable
Optional accessories	GST18/3 wiring system, emergency unit
Electrical safety class	Class I
AC-voltage & frequency	220-240V; 50/60Hz
Type of driver	Constant current
Driver options	On/Off or Dali-dimmable
Type of light source	LED, backlit (type SMD 2835)
Power dissipation (range)	15-42 W
Luminous flux (range)	1850-5238 lm
Adjustable luminous flux	4 settings
Light color (CCT)	3000-3500-4000 K
Adjustable CCT	3 positions
Color Rendering Index	Ra>80
Optical system	Diffuser/anti-glare louvre
Beam angle	75°, symmetrical
Glare rating	UGR < 19
Ingress Protection (IP)	IP20
Median useful life	L80 > 100.000 hours
Operating Temperature	-15°C to +45°C
Material	Sheet metal / plastic
Color/finish	White / Fine-Textured
Certification	CE
Warranty	5 years

APPLICATIONS



Workstations in offices and schools, hospitals, common areas, representative spaces, auditoriums, corridors, halls, etc.



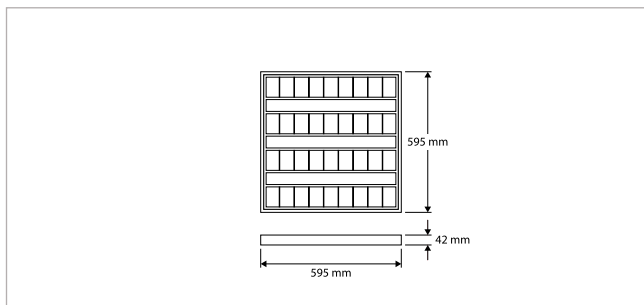



PRO-OFFICE - SURFACE-MOUNTED LUMINAIRE - SQUARE - 595 x 595 x H 42 mm - MAX. 35 W - WHITE

VERSION	LIGHT COLOR	CRI	POWER SETTING (mA)	POWER CONSUMPTION* (W)	LUMINOUS FLUX* (lm)	LUMINOUS EFFICACY (lm/W)	ART. NO.	AVAILABILITY
Standard	3000-3500-4000 K	Ra >80	336	15	1925	129	40011150	☑
			504	22	2835	128		
			672	30	3810	127		
			840	35	4470	127		

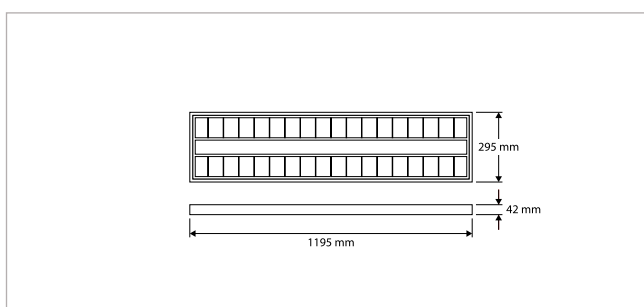

PRO-OFFICE - SURFACE-MOUNTED LUMINAIRE - RECTANGULAR - 295 x 1195 x H 42 mm - MAX. 35 W - WHITE



VERSION	LIGHT COLOR	CRI	POWER SETTING (mA)	POWER CONSUMPTION* (W)	LUMINOUS FLUX* (lm)	LUMINOUS EFFICACY (lm/W)	ART. NO.	AVAILABILITY
Standard	3000-3500-4000 K	Ra >80	336	15	1925	129	40011160	☑
			504	22	2835	128		
			672	30	3805	127		
			840	35	4431	127		

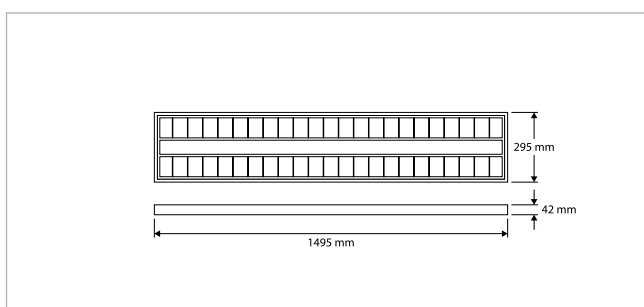

PRO-OFFICE - SURFACE-MOUNTED LUMINAIRE - RECTANGULAR - 295 x 1495 x H 42 mm - MAX. 42 W - WHITE



VERSION	LIGHT COLOR	CRI	POWER SETTING (mA)	POWER CONSUMPTION* (W)	LUMINOUS FLUX* (lm)	LUMINOUS EFFICACY (lm/W)	ART. NO.	AVAILABILITY
Standard	3000-3500-4000 K	Ra >80	610	25	3129	125	40011170	☑
			778	32	3979	125		
			896	37	4615	125		
			1030	42	5238	125		

*) Data in the columns 'Luminous flux' and 'Power consumption' in the above table apply to CCT setting 4000 K.
The luminous flux for CCT setting 3000 K or 3500 K can be derived by multiplying a corresponding value from the table by 0.96 and 0.98, respectively.

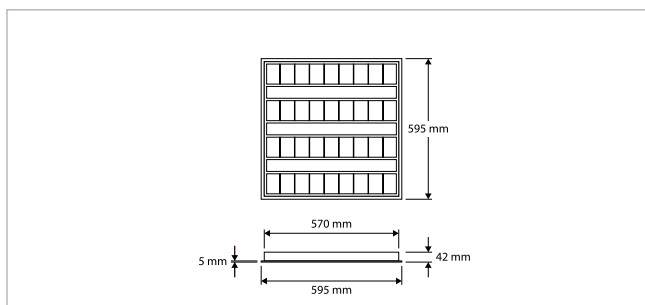

PRO-OFFICE - RECESSED LUMINAIRE - SQUARE - 595 x 595 x H 42 mm - MAX. 35 W - WHITE

VERSION	LIGHT COLOR	CRI	POWER SETTING (mA)	POWER CONSUMPTION* (W)	LUMINOUS FLUX* (lm)	LUMINOUS EFFICACY (lm/W)	ART. NO.	AVAILABILITY
Standard	3000-3500-4000 K	Ra >80	336	15	1925	129	40011100	☑
			504	22	2835	128		
			672	30	3810	127		
			840	35	4470	127		

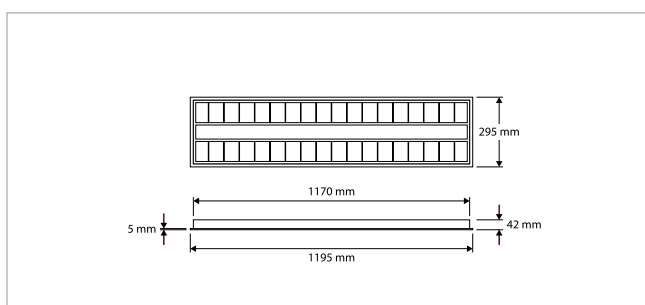

PRO-OFFICE - RECESSED LUMINAIRE - RECTANGULAR - 295 x 1195 x H 42 mm - MAX. 35 W - WHITE

VERSION	LIGHT COLOR	CRI	POWER SETTING (mA)	POWER CONSUMPTION* (W)	LUMINOUS FLUX* (lm)	LUMINOUS EFFICACY (lm/W)	ART. NO.	AVAILABILITY
Standard	3000-3500-4000 K	Ra >80	336	15	1925	129	40011110	☑
			504	22	2835	128		
			672	30	3805	127		
			840	35	4431	127		

PRO-OFFICE - ACCESSORIES - GST18/3 WIRING SYSTEM FOR RECESSED LUMINAIRES # 40011100 / 40011110

DESCRIPTION	ART. NO.	AVAILABILITY
Power cord with Euro plug - 200 cm - 2 x 0.75 mm ² - incl. ferrules	41066900	☑
Power cord with Schuko plug - 200 cm - 2 x 1.5 mm ² - incl. ferrules	41066921	☑
Power cord with Schuko plug + GST18/3 female - 200 cm - 3 x 1.5 mm ²	41066924	☑
Cable plug with GST18/3 male - 300 cm - 3 x 1.5 mm ² - incl. ferrules	41066912	☑
Connection cord with GST18/3 male + female - 300 cm - 3 x 1.5 mm ²	41066933	☑
T-Splitter - GST18/3 - 2 x female, 1 x male	41066990	☑



41066900



41066921



41066924



41066912



41066933



41066990

*) Data in the columns 'Luminous flux' and 'Power consumption' in the above table apply to CCT setting 4000 K.
The luminous flux for CCT setting 3000 K or 3500 K can be derived by multiplying a corresponding value from the table by 0.96 and 0.98, respectively.



PROLUMIA®

PROLUMIA NL

Riga 10
2993 LW BARENDRECHT
T +31 (0)180 64 54 00
E info@prolumia.nl

PROLUMIA BE

Prins Boudewijnlaan 49
2650 EDEGEM
T +32 (0)3 826 99 99
E info@prolumia.be

PROLUMIA CZ

Ke Slivenci 48
154 00 PRAHA 5 - LOCHKOV
T +420 222 563 003
E info@prolumia.cz

PROLUMIA DE

Feldbergstraße 57
61440 OBERURSEL
T +49 6171 8989 594
E info@prolumia.de

**MORE INFO ABOUT
PRO-OFFICE ONLINE:**



Version: 1.0 - 2024-06

Nedelko B.V. pays the utmost attention to its catalog and reliability and actuality of the information contained therein. Despite all care, inaccuracies and omissions can not always be prevented. Nedelko B.V. is not liable for errors or inaccuracies. For the most current information please contact our sales department.