




Data Sheet | Item Number: 770-6224

Linect® T-connector; 4-pole; Cod. A; 1 input; 2 outputs; white

<https://www.wago.com/770-6224>

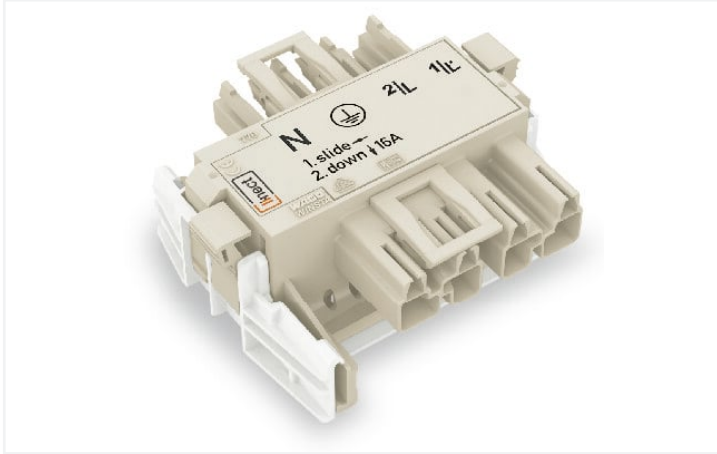

Color: ■ white

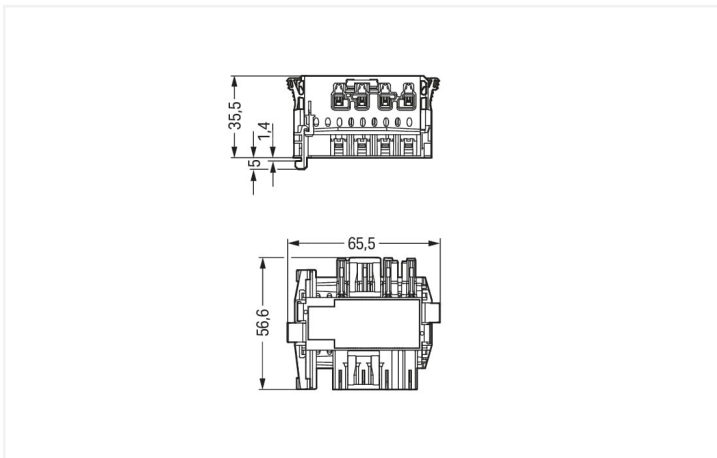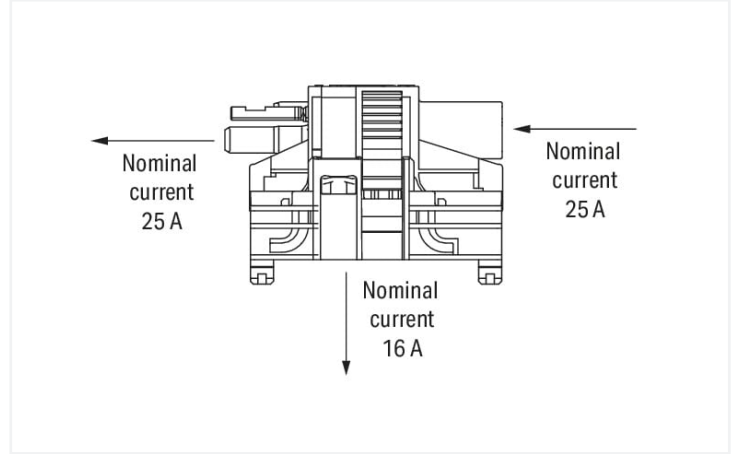

Dimensions in mm

Distribution connector *WINSTA*® MIDI rated current 25 A

The *WINSTA*® MIDI distribution connector with protection type IP20 is the pluggable solution for your application in control cabinets, on PCBs or for lighting connections. Our pluggable installation connectors with spring pressure connection technology work completely without screw connections. They allow flexible, error-free installation in numerous possible uses. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with energised elements. The Linect® interface guarantees quick and easy installation of lights with various pluggable connection systems. The *WINSTA*® MIDI pluggable installation connector with A coding in white or black is normally used for general mains applications in power distribution. This pluggable installation connector can be used for a current load of up to 25 A. Therefore, it can also be used for high power loads. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Due to the included test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MIDI

The *WINSTA*® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, even more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA*® MIDI pluggable installation connectors with protection against mismatching from WAGO.

- pluggable installation connectors with protection against mismatching
- for automation controllers
- suitable for any application
- custom-engineered solutions
- rapid, structured electrical installation

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	400 V	-	-
Rated surge voltage	6 kV	-	-
Rated current	25 A	-	-

Ratings per IEC/EN 2

Rated current 2	16 A
-----------------	------

Approvals per

UL 1977

Rated voltage	600 V
Rated current	23 A

General information

Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
----------------------------	--

Connection data

Total number of potentials	4
PE function	Preceding PE contact

Connection 1

Pole number	4
-------------	---

Physical data

Pin spacing	10 mm / 0.394 inches
Width	65.5 mm / 2.579 inches
Height	40.5 mm / 1.594 inches
Depth	56.6 mm / 2.228 inches

Mechanical data

Technology	Linect
Application	General mains applications
Coding	A
Variable coding	Yes
Marking	N 2/L 1/L'
Potential marking	N 2/L 1/L'
Mating force of a plug-in connection	Approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	When locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Type of distribution box	Linect® T-connector
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.811 MJ
Weight	36.1 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-02
eCl@ss 9.0	27-44-06-02
ETIM 8.0	EC002566
ETIM 7.0	EC002566
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821102960
Customs tariff number	85366990990

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	44167988-7ed9-4d76-b137-e846e760a160
SCIP notification number (Belgium)	9f40a707-cc86-442e-bf3a-45e51efee172
SCIP notification number (Bulgaria)	2341f9df-0aec-4a63-aa1d-47b24f8456b3
SCIP notification number (Czech Republic)	c689e81b-bdad-4ff4-9757-d3e852e74ab7
SCIP notification number (Denmark)	665ad933-6c1f-4449-a71c-60185835cc11
SCIP notification number (Finland)	d2a7202a-d748-4799-a3a2-f557304fd21a
SCIP notification number (France)	baa401d7-41ea-4225-8aaa-4c47773c1390
SCIP notification number (Germany)	a11ffe91-2a6e-423d-84b8-f67f114a568c
SCIP notification number (Hungary)	8be06503-d6d2-4bc0-9f73-5f7295c77c70
SCIP notification number (Italy)	09077603-0d9c-43ce-ab44-20d2040a5580
SCIP notification number (Netherlands)	14926ce9-d672-4ea2-9c27-328d9aadd970
SCIP notification number (Poland)	ef5def06-96db-4426-acfa-5a4d4e5f5eef
SCIP notification number (Romania)	d85336a5-9f13-4ae5-b95e-f04339547ab1



Environmental Product Compliance

SCIP notification number (Sweden)

23a664af-65b4-4dac-8589-b0c56e716f08

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1059	E 45172
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61535	40029808

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 770-6224	

Documentation

Bid Text			
770-6224	02.12.2014	doc 23.00 KB	
770-6224	19.02.2019	xml 2.86 KB	

CAD/CAE-Data

CAE data	
WSCAD Universe 770-6224	



1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



Item No.: 771-9994/206-102
pre-assembled connecting cable; Eca; Plug/open-ended; 4-pole; Cod. A; H05VV-F 4G 1.5 mm²; 1 m; 1,50 mm²; white

Item No.: 771-9994/106-102
pre-assembled connecting cable; Eca; Socket/open-ended; 4-pole; Cod. A; H05VV-F 4G 1.5 mm²; 1 m; 1,50 mm²; white

Item No.: 771-9994/006-102
pre-assembled interconnecting cable; Eca; Socket/plug; 4-pole; Cod. A; H05VV-F 4G 1.5 mm²; 1 m; 1,50 mm²; white

1.1.2 Female connector/socket



Item No.: 770-224
Socket; 4-pole; Cod. A; 4,00 mm²; white

Item No.: 770-124
Socket; with strain relief housing; 4-pole; Cod. A; 4,00 mm²; white

1.1.3 Field-wiring terminal block with Linect®



Item No.: 294-8124
Lighting connector; push-button, external; for Linect®; with direct ground contact; 1/ L´-2/L-PE-N; 4-pole; Cod. A; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

Item No.: 294-8024
Lighting connector; push-button, external; for Linect®; without ground contact; 1/ L´-2/L-PE-N; 4-pole; Cod. A; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

1.1.4 Male connector/plug



Item No.: 770-234
Plug; 4-pole; Cod. A; 4,00 mm²; white

Item No.: 770-134
Plug; with strain relief housing; 4-pole; Cod. A; 4,00 mm²; white

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding



Item No.: 770-401
Coding pin; for plugs; Plastic; gray



1.2.2 Cover

1.2.2.1 Cover



[Item No.: 770-201](#)
Lockout cap; 12-pole, separable; for sockets; Plastic; black

[Item No.: 770-221](#)
Lockout cap; 12-pole, separable; for sockets; Plastic; white

[Item No.: 770-360](#)
Lockout cap; for plugs; 5-pole; separable; yellow