



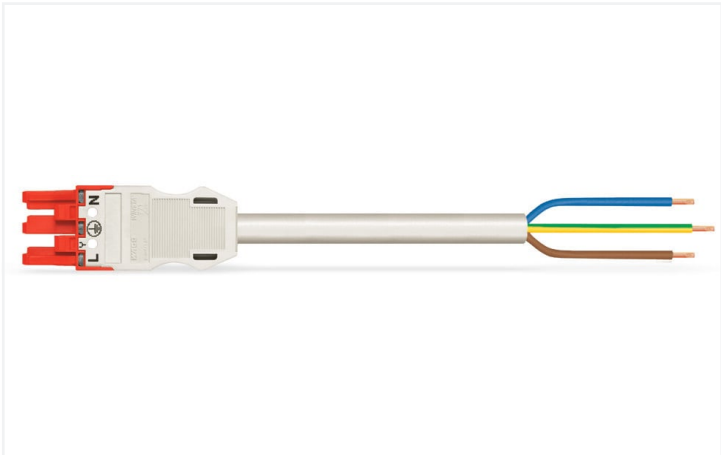

Color: ■ red

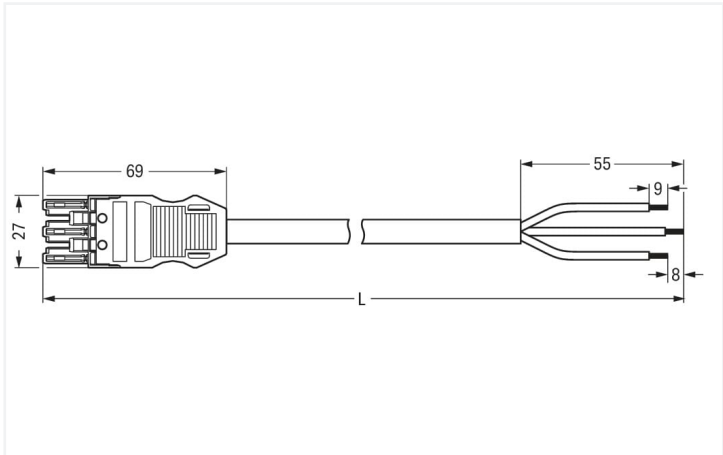

Dimensions in mm

Cable assembly WINSTA® MIDI with protection against mismating

The WINSTA® MIDI cable assembly rated current 20 A supports fast, reliable installation. Our pluggable installation connectors with spring pressure connection technology work entirely without screw connections. They allow flexible, error-free installation in a large number of possible uses. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). WINSTA® MIDI pluggable installation connectors with P coding allow error-free realization of an uninterruptible power supply (UPS). The rated current and voltage are important criteria for selecting a pluggable installation connector: They tell us about the product's domains of use. This product has a current rating of 20 A – therefore it is suitable for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy, secure, tailored installation. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The mandatory safety requirements in connection with EU CPR are met by this product through fire class E. The cable assembly is free of halogen. This eliminates the addition of environmental pollutants during production. It also achieves a higher fire class, since halogen-free materials are flame-resistant.

Fast, secure pluggable connections – cable assemblies from WAGO

A socket and a free end are provided. The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Choose durability and quality – with protection type IP20 from WAGO makes the electrical installation of electrical components noticeably easier.

- protection against mismating eliminates errors
- simple circuits
- with P coding for fault-free power supply
- custom-engineered solutions
- convenient installation and commissioning

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data        |  |                                                                                                                                                                                                                                          |     |    |
|------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|
| Ratings per            |  | IEC/EN 60664-1                                                                                                                                                                                                                           |     |    |
| Overvoltage category   |  | III                                                                                                                                                                                                                                      | III | II |
| Pollution degree       |  | 3                                                                                                                                                                                                                                        | 2   | 2  |
| Nominal voltage        |  | 250 V                                                                                                                                                                                                                                    | -   | -  |
| Rated surge voltage    |  | 4 kV                                                                                                                                                                                                                                     | -   | -  |
| Rated current          |  | 20 A                                                                                                                                                                                                                                     | -   | -  |
| Ratings per UL 1977    |  |                                                                                                                                                                                                                                          |     |    |
| Note for the US market |  | Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office. |     |    |

### General information

|                            |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
|----------------------------|------------------------------------------------------------------------------------------|

### Connection data

|                            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 3                         | <b>Connection 1</b>             |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 3                  |
|                            |                           | Sheathed cable diameter         | 9.2 ... 11.4 mm    |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

### Physical data

|              |                        |
|--------------|------------------------|
| Pin spacing  | 10 mm / 0.394 inches   |
| Width        | 28.4 mm / 1.118 inches |
| Height       | 12.9 mm / 0.508 inches |
| Total length | 1 m                    |

### Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Application                             | EDV (UPS)                                                                                                     |
| Coding                                  | P                                                                                                             |
| Variable coding                         | No                                                                                                            |
| Marking                                 | L N                                                                                                           |
| Potential marking                       | L N                                                                                                           |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - free end                                                                                             |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | H05Z1Z1-F 3G2.5                                                                                               |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

### Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                    |                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)             | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                            | red                                                                                                                    |
| Insulation material              | Polyamide (PA66)                                                                                                       |
| Fire class per EN 50575          | E <sub>ca</sub>                                                                                                        |
| Contact material                 | Copper or copper alloy; surface-treated                                                                                |
| Contact plating                  | Tin                                                                                                                    |
| Fire load                        | 29.713 MJ                                                                                                              |
| Connector color                  | red                                                                                                                    |
| Strain relief color              | white                                                                                                                  |
| Printing color of strain relief  | black                                                                                                                  |
| Sheathed cable color             | white                                                                                                                  |
| Printing color of sheathed cable | black                                                                                                                  |
| Halogen-free                     | Yes                                                                                                                    |
| Silicon-free                     | Yes                                                                                                                    |
| Sheath material                  | Halogen-free                                                                                                           |
| Rubber cable                     | No                                                                                                                     |
| Weight                           | 156.9 g                                                                                                                |
| Copper weight of the pipe        | 0.072 kg/m                                                                                                             |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 8.0              | EC002587      |
| ETIM 7.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143485999 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

| Approvals / Certificates              |          |                                                            |
|---------------------------------------|----------|------------------------------------------------------------|
| General approvals                     |          | Declarations of conformity and manufacturer's declarations |
|                                       |          |                                                            |
| Approval                              | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7972                                                |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834                                                  |
|                                       |          | Approval                                                   |
|                                       |          | EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |
|                                       |          | UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG    |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-9973/117-102                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-9973/117-102 | 19.02.2019 | xml<br>3.00 KB  | ↓ |
| 771-9973/117-102 | 05.12.2014 | doc<br>26.50 KB | ↓ |

CAD/CAE-Data

|                  |  |  |   |
|------------------|--|--|---|
| CAE data         |  |  |   |
| WSCAD Universe   |  |  | ↓ |
| 771-9973/117-102 |  |  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



[Item No.: 770-101](#)  
Locking lever; for flying leads; for manual operation; black



[Item No.: 770-121](#)  
Locking lever; for flying leads; for manual operation; white



[Item No.: 770-111](#)  
Locking lever; for flying leads; for tool operation; black



[Item No.: 770-131](#)  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



[Item No.: 770-201](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



[Item No.: 770-221](#)  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



[Item No.: 897-2003](#)  
Protective cap; Type2; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white