


Data Sheet | Item Number: 294-4023

Lighting connector; push-button, external; without ground contact; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4023>



Color: white

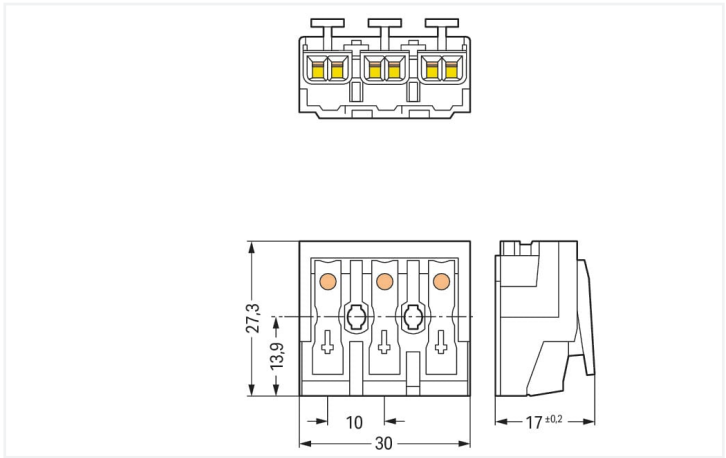

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data									
Connection points	15	Connection 1							
Total number of potentials	3	Connection type 1	External 1						
Number of connection types	4	Connection technology	Push-in CAGE CLAMP®						
PE function	without PE contact	Number of connection points	2						
		Actuation type	Push-button						
		Connectable conductor materials	Copper						
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG						
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG						
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG						
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG						
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches						
		Pole number	3						
		Wiring direction	Side-entry wiring						

Connection 2

Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3

Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4

Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

Mechanical data

Marking	N´ - - L´
Mounting type	without snap-in mounting feet

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.182 MJ
Halogen-free	Yes
Weight	9.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821097709
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	5aa5918d-c074-4150-bea8-afc318936ffa
SCIP notification number (Belgium)	fe2d278e-fa10-4740-b14e-4b8ea912d088
SCIP notification number (Bulgaria)	5937c14e-2ed5-4d3c-9ebd-9a11710f5a8d
SCIP notification number (Czech Republic)	83c47ef4-eadf-4316-9353-7f1a28f66572
SCIP notification number (Denmark)	a7bf66b0-270c-41ac-9c7b-380ef7b3b870
SCIP notification number (Finland)	89c927e2-4bae-498f-886a-73f26b1be6de
SCIP notification number (France)	d35c138d-819c-458b-9086-91e50bb7bfed
SCIP notification number (Germany)	18f5b408-e320-48bd-a551-0c4a1ba21b4c
SCIP notification number (Hungary)	19d6fdd3-043d-46c2-8d7b-2e70cc167d1e
SCIP notification number (Italy)	e31c90e0-eedd-403c-a609-d6c2cbd86462
SCIP notification number (Netherlands)	5f6a0275-ccbf-4047-a2d4-21fefe654e76
SCIP notification number (Poland)	2d2bccae-ce20-484f-b02d-107d1af01e80
SCIP notification number (Romania)	de794643-8738-4d26-8036-e3b85034d10c
SCIP notification number (Sweden)	0327018f-cba7-42ee-b4a4-e782e26216ad



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-4023



Documentation

Additional Information
Technical Section
pdf 2240.62 KB



Bid Text
294-4023
19.02.2019
xml 5.58 KB
294-4023
13.06.2017
doc 27.50 KB



CAD/CAE-Data

CAD data
2D/3D Models 294-4023



CAE data
WSCAD Universe 294-4023
ZUKEN Portal 294-4023



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white



[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool


1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

Installation Notes


Installation



3-pole – without ground contact




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

