




Color: white

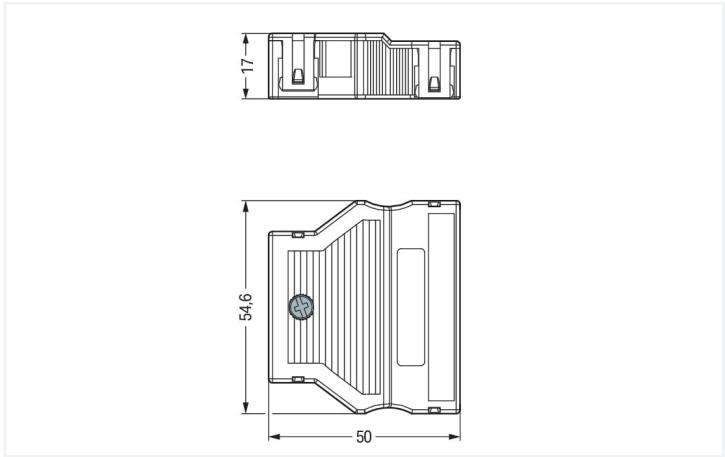

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 5-pole

The strain relief housing from the *WINSTA*® MIDI product line is the best solution for reliable installation. With WAGO, you benefit from a large selection of accessories for the *WINSTA*® product line. *WINSTA*® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy and maximally flexible installation. A range up to 55 mm can be used for the strip length.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The *WINSTA*® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA*® MIDI accessories from WAGO.

- simple circuits
- quick replacement of defective units during ongoing operation

Connection data	
Connection 1	
Pole number	5
Connectable sheathed cable diameter	5 ... 9 mm
Strip length (outer insulation)	55 mm

Physical data	
Width	54.6 mm / 2.15 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.374 MJ
Weight	13.7 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918071765
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
 			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance			↓
770-515/023-000			

Documentation			
Bid Text			
770-515/023-000	19.02.2019	xml 2.74 KB	↓
770-515/023-000	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models		WSCAD Universe	↓
770-515/023-000	↓	770-515/023-000	
		ZUKEN Portal	↓
		770-515/023-000	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white