


Data Sheet | Item Number: 770-517/047-000

Strain relief housing; 7-pole; with locking clip; for 1 cable; 8.0 ... 15.0 mm; 55 mm; white


<https://www.wago.com/770-517/047-000>



Color: ■ white

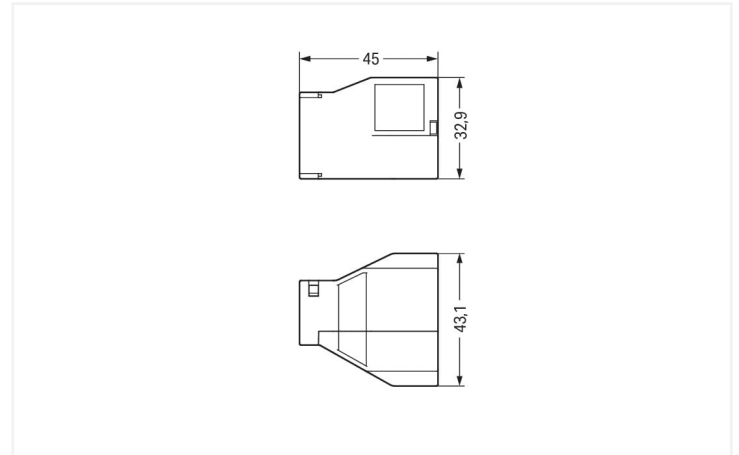

Dimensions in mm

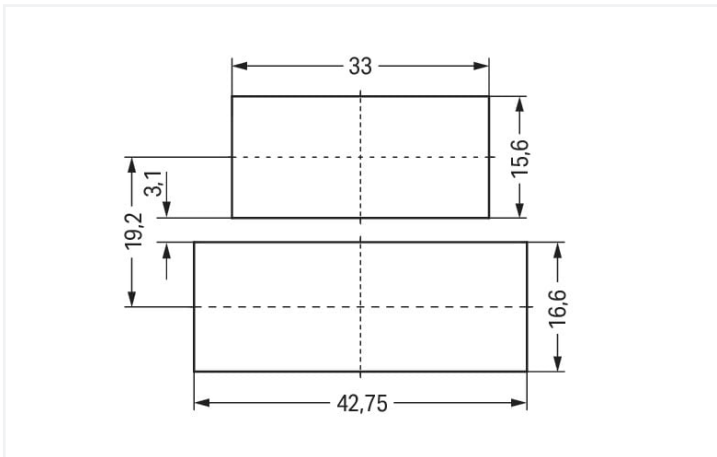

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 7-pole

The strain relief housing from the *WINSTA*® MIDI product line is the intelligent solution for straightforward electrical installation. You can rely on the level of quality of *WINSTA*® components from WAGO for your electrical installation accessories too. The *WINSTA*® MIDI Pluggable Connection System with Push-in *CAGE CLAMP*® spring pressure connection technology facilitates safe electrification. Thanks to the integrated test slot, connections can be checked even when they are plugged in. That saves time and reduces installation labor and costs. The strip length is 55 mm.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MIDI

The *WINSTA*® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Use of this pre-assembled system reduces assembly times and installation errors at the construction site. Choose durability and quality – the *WINSTA*® MIDI accessory from WAGO makes the electrical installation of electrical components significantly easier.

- for automation controllers
- convenient installation and commissioning



Connection data

Connection 1	
Pole number	7
Connectable sheathed cable diameter	8 ... 15 mm
Strip length (outer insulation)	55 mm

Physical data

Width	43.1 mm / 1.697 inches
Height	32.9 mm / 1.295 inches
Depth	45 mm / 1.772 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.413 MJ
Weight	13.7 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data

eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	200 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454554460
Customs tariff number	39269097900

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-517/047-000	
---	--

Documentation

Bid Text

770-517/047-000	19.02.2019	xml 2.82 KB	
770-517/047-000	06.01.2015	doc 23.50 KB	

CAD/CAE-Data

CAE data

WSCAD Universe 770-517/047-000	
-----------------------------------	--

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

Installation Notes

Application



Snap-on type strain relief housings for:

- 3-pole socket or plug
- 4-pole socket or plug

"Flying leads"

(NOTICE: Only use locking levers on upper position!)

"Flying leads"