



Data Sheet | Item Number: 770-774/072-000
Snap-in plug; 4-pole; Cod. B; 4,00 mm²; light green


<https://www.wago.com/770-774/072-000>

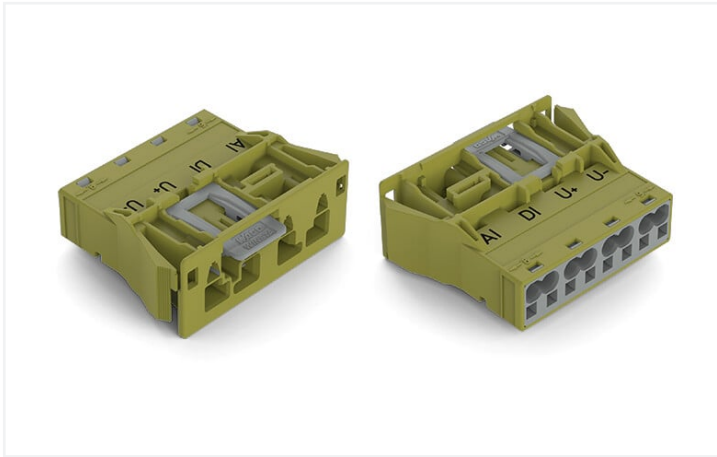

Color: ■ light green

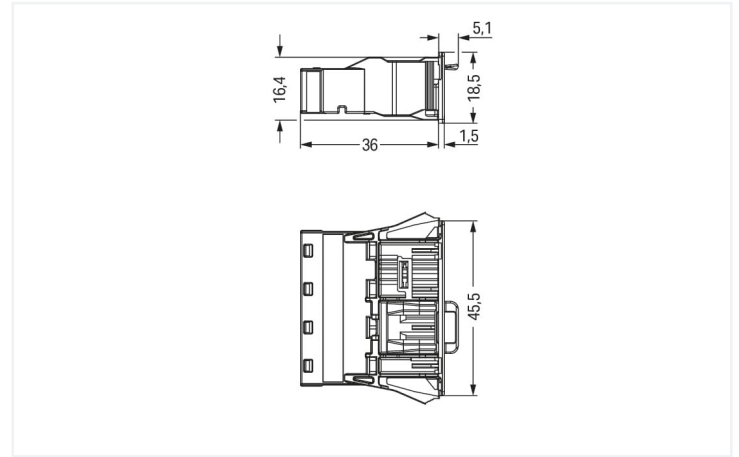

Dimensions in mm

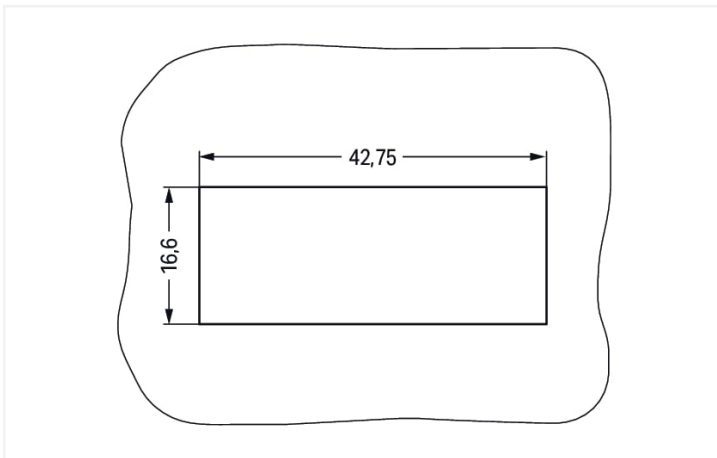

Dimensions in mm

Plate thickness: 0.5 ... 2 mm

Cutout tolerance: + 0.1 mm

Please note!

Male connector/plug **WINSTA®** MIDI with protection type IP20

Use effective pluggable connections instead of laborious screw connections: With the **WINSTA®** MIDI male connector/plug with protection against mismatching, WAGO pluggable installation connectors can be used when requirements repeat or are distributed on a defined grid, for example for installing grid lighting or flush-mount lighting. The coding options reduce installation errors, allowing fast, maintenance-free wiring of all components. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with energised contact elements. B coding enables the **WINSTA®** MIDI pluggable installation connectors to be used for application control in automation, robotics, and mechanical engineering. The rated current and voltage are important criteria for selecting a pluggable installation connector: They provide information about possible domains of use and applications. This product has a current rating of 25 A – as a result it is suitable for powerful loads. Our **WINSTA®** MIDI product line offers total flexibility for the installation of applications. With its Push-in **CAGE CLAMP®** spring pressure connection technology, it achieves time-saving, error-free installation and offers flexibility and customization for meeting various installation requirements.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The **WINSTA®** Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus faster, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with **WINSTA®** MIDI pluggable installation connectors with locking lever from WAGO.

- protection against mismatching eliminates errors
- pre-assembled versions
- for automation controllers
- flexible installation to save space
- convenient installation and commissioning



Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).
Variants:	Other pole markings Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		400 V	-	-
Rated surge voltage		6 kV	-	-
Rated current		25 A	-	-
Approvals per		UL 1977		
Rated voltage		600 V		
Rated current		23 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		

Connection data																												
Connection points	8	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>4 mm² / 12 AWG</td></tr><tr><td>Solid conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>1.5 ... 4 mm² / 16 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>0.5 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>4</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	4 mm² / 12 AWG	Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG	Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG	Strip length	9 mm / 0.35 inches	Pole number	4	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	4 mm² / 12 AWG																											
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG																											
Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	4																											
Conductor entry direction to mating direction	0 °																											
Total number of potentials	4																											

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	45.5 mm / 1.791 inches
Height	18.5 mm / 0.728 inches
Depth	41.1 mm / 1.618 inches

Mechanical data

Application	Control technology
Coding	B
Variable coding	Yes
Marking	AI DI U+ U-
Potential marking	AI DI U+ U-
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Housing sheet thickness	0.5 ... 2 mm / 0.02 ... 0.079 inches
Mounting type	Snap-in flange
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Contact type (pluggable connector)	Male connector/plug
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data

Note (material data)	Information on material specifications can be found here
Color	light green
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.316 MJ
Weight	14.7 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C




Commercial data		
eCl@ss 10.0		27-44-06-02
eCl@ss 9.0		27-44-06-02
ETIM 8.0		EC002566
ETIM 7.0		EC002566
PU (SPU)		100 pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821555711
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171
cURus Underwriters Laboratories Inc.	UL 1059	E 45172

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 770-774/072-000	

Documentation

Bid Text			
770-774/072-000	19.02.2019	xml 2.93 KB	
770-774/072-000	08.06.2015	doc 24.50 KB	



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-774/072-000	EPLAN Data Portal 770-774/072-000
	WSCAD Universe 770-774/072-000
	ZUKEN Portal 770-774/072-000

1 Compatible Products

1.1 System counterpart

1.1.1 Female connector/socket



Item No.: [770-264/072-000](#)
Socket; 4-pole; Cod. B; 4,00 mm²; light green

1.2 Optional Accessories

1.2.1 Coding

1.2.1.1 Coding



Item No.: [770-401](#)
Coding pin; for plugs; Plastic; gray

1.2.2 Cover

1.2.2.1 Cover



Item No.: [770-644](#)
Lockout cap; 4-pole; for cutouts; Plastic; black



Item No.: [770-694](#)
Lockout cap; 4-pole; for cutouts; Plastic; white



Item No.: [770-360](#)
Lockout cap; for plugs; 5-pole; separable; yellow




1.2.3 Tool

1.2.3.1 Operating tool



Item No.: [210-719](#)
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft

Installation Notes




We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.

1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
2. Strip length = 9 mm
3. Extended ground conductor = 8 mm

To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.

To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.