



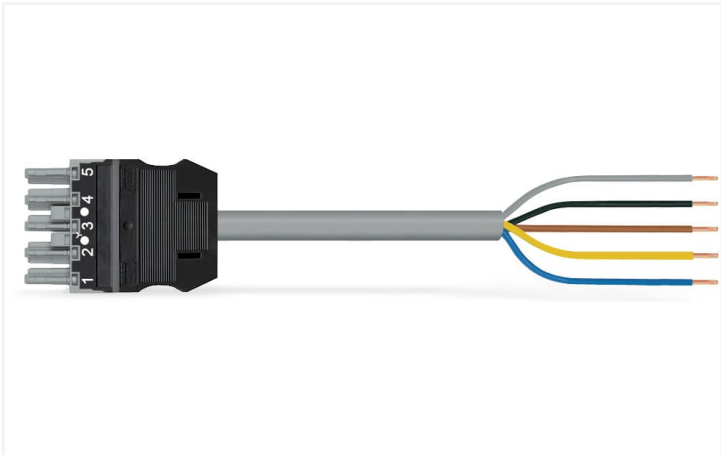

Color: ■ gray

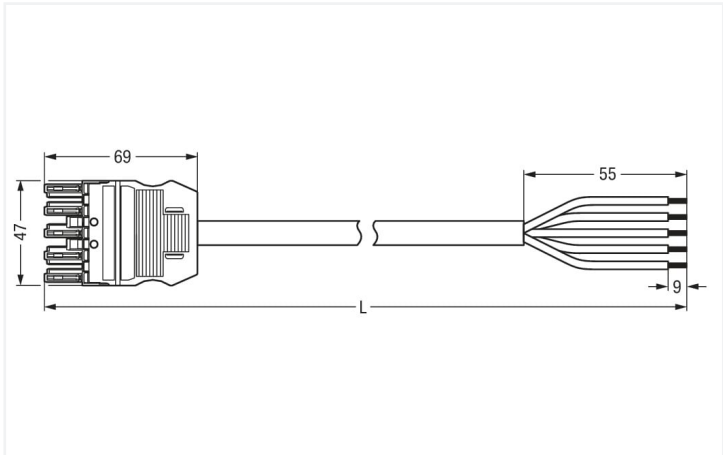

Dimensions in mm

Cable assembly WINSTA® MIDI with strain relief

Use effective pluggable connections instead of laborious screw connections: With the WINSTA® MIDI cable assembly rated current 16 A. WAGO pluggable installation connectors can be used when specifications repeat or are distributed on a defined grid, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Solutions like the WINSTA® MIDI pluggable installation connectors with B coding are suitable for process control, for example, for lighting or within data networks. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in can be found in a variety of projects you can use for quick, easy and maximally flexible electrical installation. According to the European CPR, the fire class of the cables used in construction is decisive for the safety of buildings as well. For buildings with medium-level safety requirements, cable assemblies with fire class E are suitable.

Fast, secure pluggable connections – cable assemblies from WAGO

A socket and a free end are provided. The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Use of this pre-assembled system reduces time spent on assembly and errors during installation at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with fire class E from WAGO.

- effective protection against mismatching
- pre-assembled versions
- for automation controllers
- exact dimensions
- convenient installation and commissioning

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data      |       |                |    |                        |                                                                                                                                                                                                                                          |
|----------------------|-------|----------------|----|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Ratings per          |       | IEC/EN 60664-1 |    | Ratings per UL 1977    |                                                                                                                                                                                                                                          |
| Overvoltage category | III   | III            | II | Note for the US market | Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office. |
| Pollution degree     | 3     | 2              | 2  |                        |                                                                                                                                                                                                                                          |
| Nominal voltage      | 400 V | -              | -  |                        |                                                                                                                                                                                                                                          |
| Rated surge voltage  | 6 kV  | -              | -  |                        |                                                                                                                                                                                                                                          |
| Rated current        | 16 A  | -              | -  |                        |                                                                                                                                                                                                                                          |

## General information

|                            |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
|----------------------------|------------------------------------------------------------------------------------------|

## Connection data

|                            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | <b>Connection 1</b>             |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 5                  |
|                            |                           | Sheathed cable diameter         | 9.3 ... 11.6 mm    |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

## Physical data

|              |                      |
|--------------|----------------------|
| Pin spacing  | 10 mm / 0.394 inches |
| Width        | 47 mm / 1.85 inches  |
| Total length | 4 m                  |

## Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Application                             | Control technology                                                                                            |
| Coding                                  | B                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | 1 2 3 4 5                                                                                                     |
| Potential marking                       | 1 2 3 4 5                                                                                                     |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - free end                                                                                             |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | Control line 5 x 1.5                                                                                          |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

## Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                    |                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)             | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                            | gray                                                                                                                   |
| Insulation material              | Polyamide (PA66)                                                                                                       |
| Fire class per EN 50575          | E <sub>ca</sub>                                                                                                        |
| Contact material                 | Copper or copper alloy; surface-treated                                                                                |
| Contact plating                  | Tin                                                                                                                    |
| Fire load                        | 0.624 MJ                                                                                                               |
| Connector color                  | gray                                                                                                                   |
| Strain relief color              | black                                                                                                                  |
| Printing color of strain relief  | white                                                                                                                  |
| Sheathed cable color             | gray                                                                                                                   |
| Printing color of sheathed cable | black                                                                                                                  |
| Halogen-free                     | No                                                                                                                     |
| Silicon-free                     | Yes                                                                                                                    |
| Sheath material                  | PVC                                                                                                                    |
| Rubber cable                     | No                                                                                                                     |
| Weight                           | 675.9 g                                                                                                                |
| Copper weight of the pipe        | 0.072 kg/m                                                                                                             |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 8.0              | EC002587      |
| ETIM 7.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143462327 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

| Approvals / Certificates              |          |                  |
|---------------------------------------|----------|------------------|
| General approvals                     |          |                  |
|                                       |          |                  |
| Approval                              | Standard | Certificate Name |
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7355      |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834        |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-9995/106-403                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-9995/106-403 | 19.02.2019 | xml<br>3.00 KB  | ↓ |
| 771-9995/106-403 | 05.06.2015 | doc<br>26.00 KB | ↓ |

CAD/CAE-Data

|                   |   |
|-------------------|---|
| CAE data          |   |
| EPLAN Data Portal | ↓ |
| 771-9995/106-403  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



**Item No.: 770-101**  
Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**  
Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



**Item No.: 770-201**  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



**Item No.: 770-221**  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



**Item No.: 897-2005**  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



[Item No.: 770-310](#)  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



[Item No.: 770-450/000-006](#)  
Marker card; Plastic; blue



[Item No.: 770-450/000-001](#)  
Marker card; Plastic; green



[Item No.: 770-450/000-012](#)  
Marker card; Plastic; orange



[Item No.: 770-450/000-005](#)  
Marker card; Plastic; red



[Item No.: 770-450](#)  
Marker card; Plastic; white



[Item No.: 770-450/000-002](#)  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



[Item No.: 210-334](#)  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white