



Data Sheet | Item Number: 294-8113

Lighting connector; push-button, external; for Linect®; with direct ground contact;
3-pole; Cod. A; Lighting side: for solid conductors; Inst. side: for all conductor types;
max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-8113>

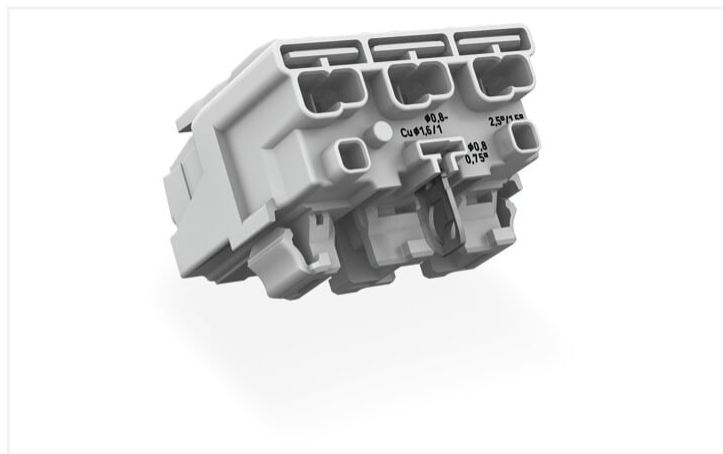

Color: white

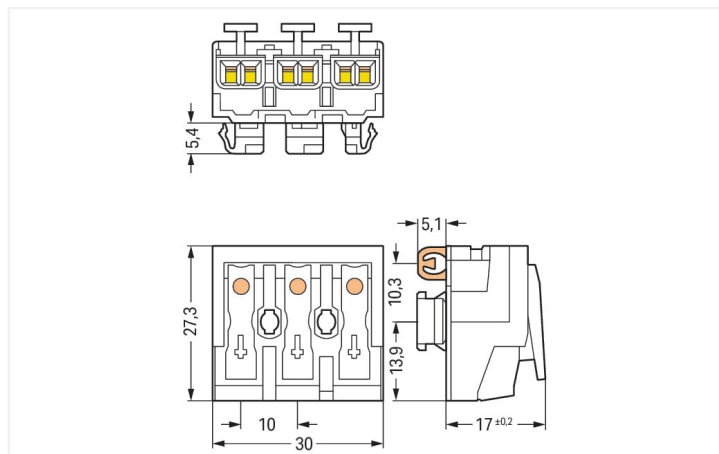

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connector end
- - Strain relief plate can be retrofitted

Electrical data

Ratings	Connection points		
Ratings per	IEC/EN 60998-1	IEC/EN 60998-1	IEC/EN 60998-1
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Connection points		
Ratings per	IEC/EN 60998-2-2	IEC/EN 60998-2-2	IEC/EN 60998-2-2
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	24 A

Ratings	Linect® plug-in connection		
Ratings per	IEC/EN 61984	IEC/EN 61984	IEC/EN 61984
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	500 V
Rated surge voltage	-	-	4 kV
Rated current	-	-	16 A

Connection data

Total number of potentials	3
Number of connection types	4
PE function	Direct PE contact

Connection 1

Connection type 1	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Solid conductor	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm ² / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm ² / 18 ... 14 AWG



Connection 1	
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	3

Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 14 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 16 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3	
Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 ... 14 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height	22.4 mm / 0.882 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches

Mechanical data	
Technology	Linect
Marking	N L

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin
Fire load	0.2 MJ
Weight	10 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821098805
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	c4724658-d854-4c22-8f5f-c1cd430690c6
SCIP notification number (Belgium)	b8983cf4-8a63-4a24-b94d-e1fadf07749a
SCIP notification number (Bulgaria)	0211a753-2519-4d0c-b57d-c758bef22d57
SCIP notification number (Czech Republic)	52188b56-cd7c-46fa-aaf5-967b08be522e
SCIP notification number (Denmark)	1c8f7e71-ac92-4ba0-a8d3-3af5c188f3fa
SCIP notification number (Finland)	f8605121-21a9-42ec-97cb-87f12d6b6e4e
SCIP notification number (France)	34ceff3a-3f87-45a0-a0e6-61f6468ba5c8
SCIP notification number (Germany)	cb5ee07d-b98b-46b6-a5c6-fbb1e59c2e4a
SCIP notification number (Hungary)	2ad8128e-1810-404a-a15f-40aa315fe882
SCIP notification number (Italy)	85b539a9-172b-4ab4-82a8-9d6f6e36860f
SCIP notification number (Netherlands)	d343592c-b41c-4ea5-aaad-e18b37862308
SCIP notification number (Poland)	df5c2222-850e-4cb3-830e-6cac2eaddb11
SCIP notification number (Romania)	b0ee8315-b218-4210-9944-365568b4786b
SCIP notification number (Sweden)	ef146875-5d73-435a-8381-c3d31530b42d



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-8113

Documentation

Additional Information
Technical Section
03.04.2019
pdf 2010.85 KB

CAD/CAE-Data

CAD data
2D/3D Models 294-8113

CAE data
WSCAD Universe 294-8113
ZUKEN Portal 294-8113