




Color: ■ white

Similar to illustration

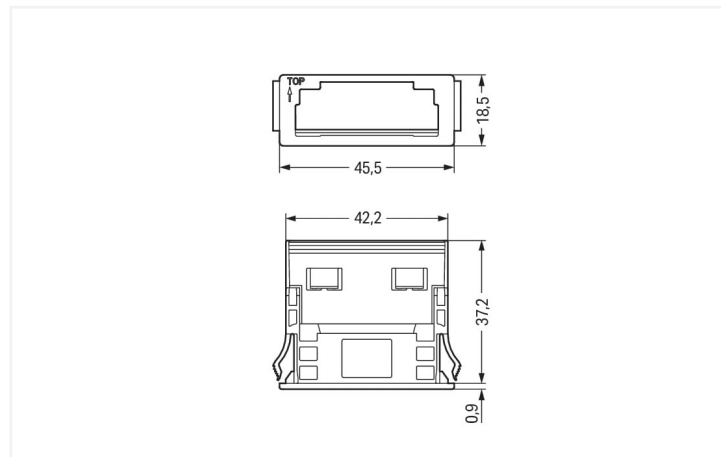

Dimensions in mm

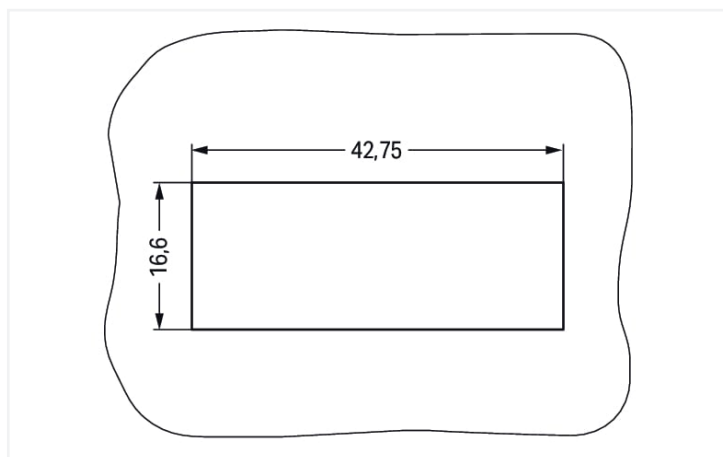


Plate thickness: 1 ... 3 mm
Cutout tolerance: + 0.1 mm

Please see note below!

Mounting accessories WINSTA® MIDI 4-pole

Put your trust in tried-and-tested accuracy for the installation in your project: The mounting accessories from the WINSTA® MIDI product line. With WAGO, you can enjoy the advantages of a large selection of expansions for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy, flexible, and secure electrical installation.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It allows fast, secure and, above all, error-free installation of components and cables. Choose quality and durability – the WINSTA® MIDI accessory with protection against mis-mating from WAGO makes the installation of electrical components substantially easier.

- pre-assembled versions
- quick replacement of defective units during ongoing operation



Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Connection data	
Connection 1	
Pole number	4

Physical data	
Width	45.5 mm / 1.791 inches
Height	18.5 mm / 0.728 inches
Depth	37.2 mm / 1.465 inches

Mechanical data	
Housing sheet thickness	1 ... 3 mm / 0.039 ... 0.118 inches
Mounting type	Snap-in flange
Suitable	for socket and plug

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.128 MJ
Weight	4.3 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	100 pcs
Packaging type	Foil
Country of origin	DE
GTIN	4055143404952
Customs tariff number	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-339

↓

Documentation				
Bid Text				
770-339	19.02.2019	xml	2.57 KB	↓
770-339	13.04.2017	doc	23.50 KB	↓

CAD/CAE-Data	
CAD data 2D/3D Models 770-339 ↓	CAE data ZUKEN Portal 770-339 ↓



- 1 Compatible Products
- 1.1 Optional Accessories
- 1.1.1 Locking system
- 1.1.1.1 Locking system



Item No.: [770-140](#)
Locking lever; for sockets and plugs; for tool operation; gray

Installation Notes

Installation



Insert the socket or plug into the frame (observe the "TOP" marking on the frame!), then snap the assembled unit into the cutout.

Snap the assembled unit into the cutout.

