




Color: ■ green

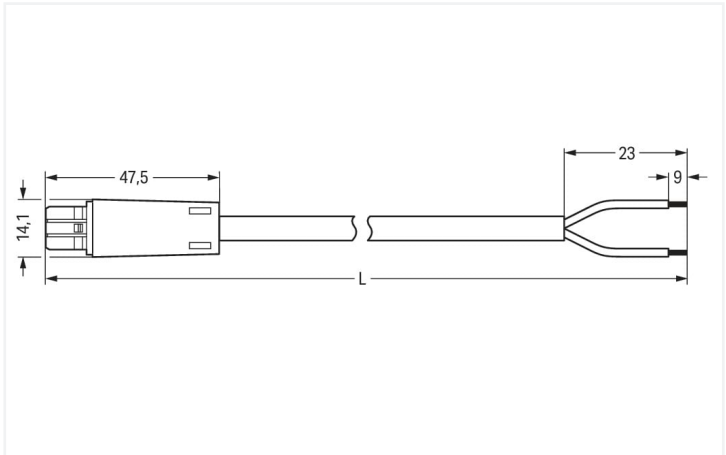

Dimensions in mm

Cable assembly WINSTA® KNX with protection against mismatching

The WINSTA® KNX cable assembly 2-pole allows installation of fine-stranded and solid conductors. WAGO pluggable installation connectors can be used when criteria repeat or are distributed on a defined grid, for example for installing grid lighting or flush-mount lighting. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). That results in the fact that users' fingers will never come into contact with electrified contact elements. The KNX standard is the ultimate benchmark in building automation. It ensures error-free, manufacturer-independent networking of advanced building systems. The standardised WINSTA® KNX pluggable installation connectors in green are employed for transfer of signals in KNX networks. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The mandatory safety requirements in connection with EU CPR are met by this product through fire class E.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable assembly is equipped with a socket and a free end. The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, even more reliable, and error-free. Using this pre-assembled system decreases assembly times and errors during installation at the construction site. Now you can also reduce installation costs without compromising quality and safety: The WINSTA® KNX pluggable installation connector with protection type IP20 reduces the need for servicing and prevents unnecessary downtime.

- products perfectly tailored to your requirements guarantee safe use
- with E coding for supplying auxiliary power to I/O devices
- exact dimensions
- fast, secure installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category		III	III	II	Approx. 3 mΩ contact resistance	
Pollution degree		3	2	2		
Nominal voltage		50 V	-	-		
Rated surge voltage		0.8 kV	-	-		
Rated current		3 A	-	-		



Connection data			
Total number of potentials	2	Connection 1	
Conductor preparation	stripped	Conductor diameter	0.8 mm
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Sheathed cable diameter	5 ... 7 mm
		Strip length (outer insulation)	23 mm
		Connection type	Socket - free end

Physical data	
Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	5 m

Mechanical data	
Technology	KNX
Coding	E
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	UNITRONIC BUS EIB 2x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection	
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data	
Note (material data)	Information on material specifications can be found here
Color	green
Insulation material	Polyamide (PA66)
Fire class per EN 50575	E _{ca}
Contact material	Copper alloy; surface-treated
Contact plating	Tin
Fire load	4.497 MJ
Connector color	green
Strain relief color	black
Sheathed cable color	green
Printing color of sheathed cable	black
Halogen-free	No
Silicon-free	Yes



Material data	
Sheath material	PVC
Rubber cable	No
Weight	275 g
Copper weight of the pipe	0.021 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	PL
GTIN	4055143306850
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 894-8992/133-506	

Documentation

Bid Text			
894-8992/133-506	19.02.2019	xml 2.97 KB	
894-8992/133-506	08.01.2015	doc 25.00 KB	



CAD/CAE-Data	
CAE data	
WSCAD Universe 894-8992/133-506	