




Color: ■ black

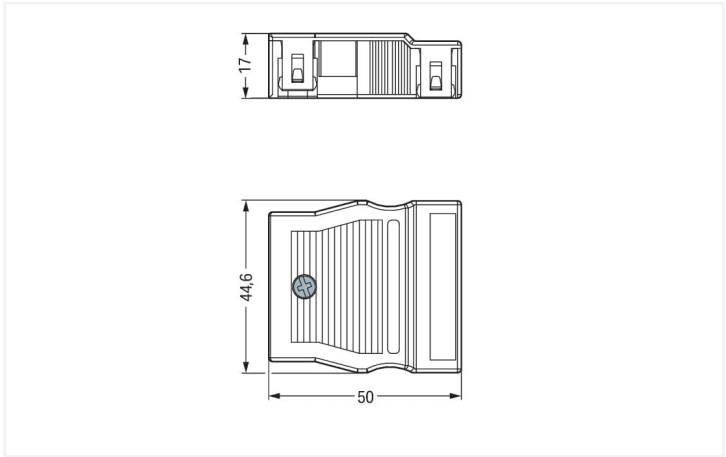

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 4-pole

When using the strain relief housing from the *WINSTA*® MIDI product line, error-free installation is ensured. With WAGO, you benefit from a large selection of expansions for the *WINSTA*® product line. The *WINSTA*® MIDI product line achieves maximum flexibility for the installation. Through its Push-in CAGE CLAMP® spring pressure connection technology, it achieves time-saving, error-free installation and offers flexibility and customization for meeting various installation requirements. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The *WINSTA*® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose quality and durability – the *WINSTA*® MIDI accessory from WAGO makes the installation of electrical components substantially easier.

- for automation controllers
- convenient installation and commissioning

Connection data

Connection 1	
Pole number	4
Connectable sheathed cable diameter	5 ... 9 mm
Strip length (outer insulation)	55 mm

Physical data

Width	44.6 mm / 1.756 inches
Height	17 mm / 0.669 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.359 MJ
Weight	12.9 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454341756
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates					
General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance
770-504/023-000

↓

Documentation

Bid Text			
770-504/023-000	19.02.2019	xml 2.74 KB	↓
770-504/023-000	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 770-504/023-000	EPLAN Data Portal 770-504/023-000
↓	↓
	WSCAD Universe 770-504/023-000
	↓
	ZUKEN Portal 770-504/023-000
	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white