


Data Sheet | Item Number: 789-134


PCB terminal block; 2.5 mm²; Pin spacing 5 mm; 1-pole; CAGE CLAMP®; 2,50 mm²; gray

<https://www.wago.com/789-134>


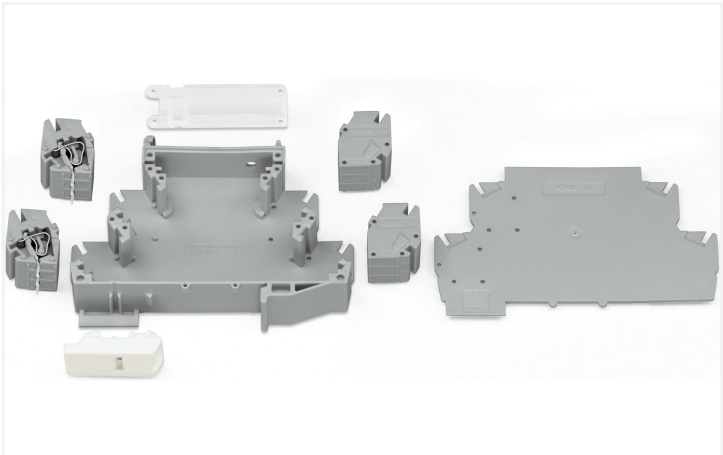


Color: ■ gray

Similar to illustration

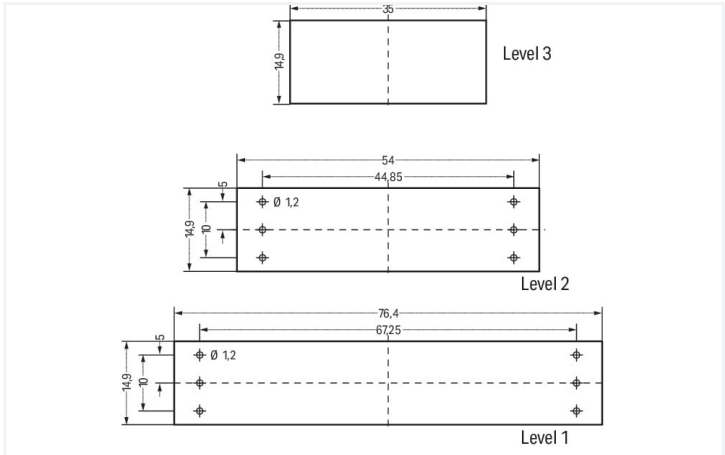

PCB dimensions, vertical mounting: (PCB thickness max. 1.5 mm) in level 1; (PCB thickness max. 1 mm) in level 2 and 3

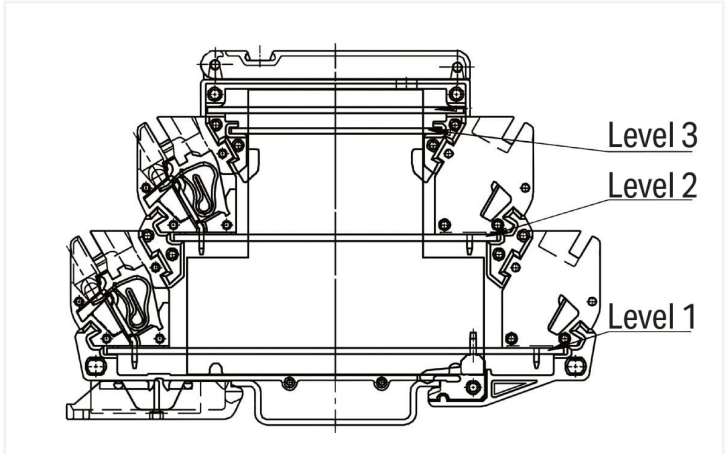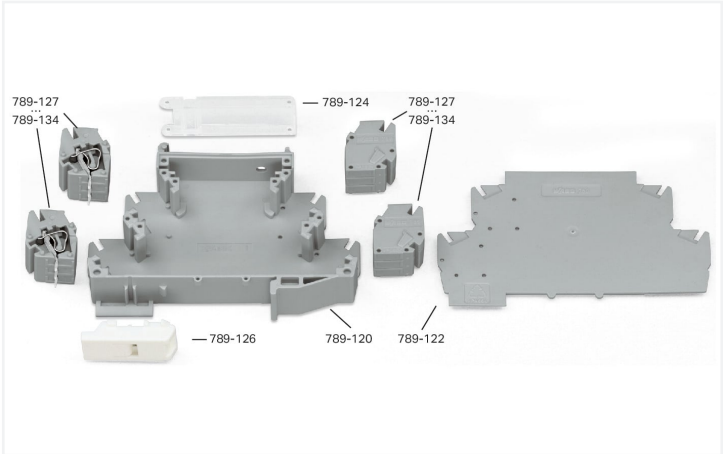

Universal modular component plug housing, as rail-mount terminal block – compact terminal block, 3-pole: COO*
(*C = with clamping spring; O = without clamping spring; Housing open on the right side)

Connection data	
Pole number	3
Connections (number)	1

Mechanical data	
Housing design	DIN-rail-mount enclosure
Suitable	for 789-120



Material data		
Color		gray
Insulation material		Polyamide (PA66)
Flammability class per UL94		V0
Fire load		0.062 MJ
Weight		2.7 g

Environmental requirements		
Processing temperature		-25 ... +70 °C

Commercial data		
eCl@ss 10.0		27-18-27-02
eCl@ss 9.0		27-18-27-02
ETIM 8.0		EC001031
ETIM 7.0		EC001031
PU (SPU)		100 (1) pcs
Packaging type		Box
Country of origin		DE
GTIN		4044918611794
Customs tariff number		85369010000

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 789-134		

CAD/CAE-Data		
CAD data		
2D/3D Models 789-134		
CAE data		
WSCAD Universe 789-134		
ZUKEN Portal 789-134		



1 Compatible Products

1.1 Optional Accessories

1.1.1 Ferrule

1.1.1.1 Ferrule



Item No.: 216-241

Ferrule; Sleeve for 0.5 mm² / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



Item No.: 216-242

Ferrule; Sleeve for 0.75 mm² / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



Item No.: 216-243

Ferrule; Sleeve for 1 mm² / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red



Item No.: 216-244

Ferrule; Sleeve for 1.5 mm² / AWG 16; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; black

1.1.2 System enclosure

1.1.2.1 DIN-rail-mount enclosure



Item No.: 789-120

Housing 55 mm; gray