



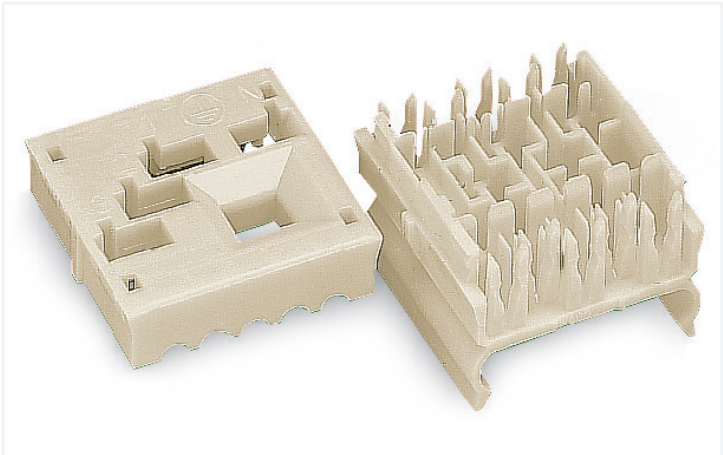


Color: white

Similar to illustration

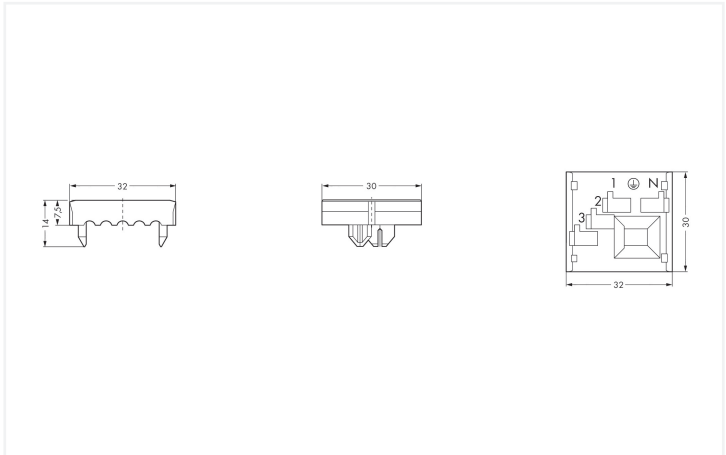

Dimensions in mm

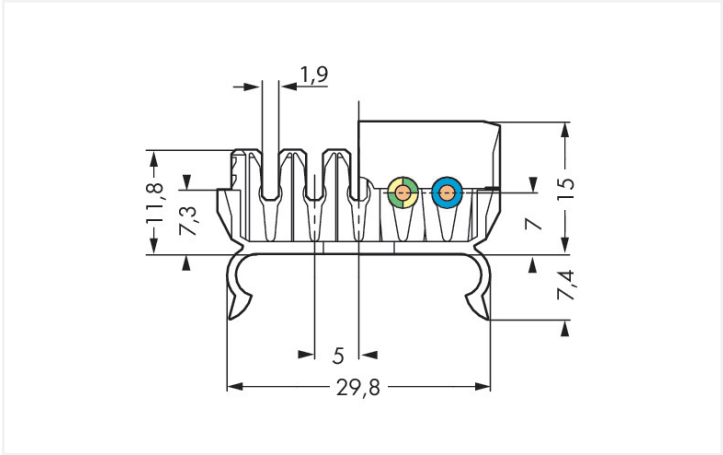

Dimensions in mm

- Flexible, modular 5- to 11-pole connector system
- Future system expansions possible
- Compact design

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	500 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	-	-



Connection data

Number of connection types	1	Connection 1	
		Strip length	16 ... 18 mm / 0.63 ... 0.71 inches
		Pole number	5

Physical data

Width	30 mm / 1.181 inches
Height from the surface	14 mm / 0.551 inches
Depth	32 mm / 1.26 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.102 MJ
Weight	3.6 g

Environmental requirements

Temperature stability	105 °C
-----------------------	--------

Commercial data

Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4017332145039
Customs tariff number	85369010000

Environmental Product Compliance

RoHS Compliance Status	Compliant, No Exemption
------------------------	-------------------------



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40032309

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 267-140	
--	--

Documentation

Additional Information

Technical Section	03.04.2019	pdf 2010.85 KB	
-------------------	------------	-------------------	--

CAD/CAE-Data

CAD data

2D/3D Models 267-140	
----------------------	--

CAE data

EPLAN Data Portal 267-140	
ZUKEN Portal 267-140	