




Color: ■ black

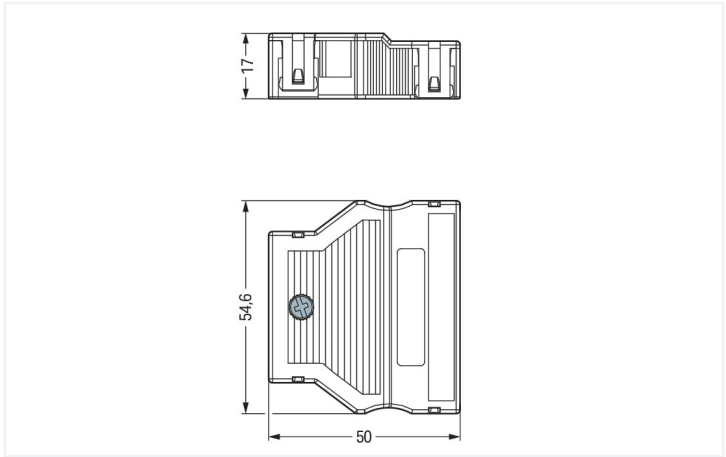

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 5-pole

Realize your installation project with ease: The strain relief housing from the *WINSTA*® MIDI product line is the product of your choice for quick, straightforward installation. With WAGO, you benefit from a large selection of expansions for the *WINSTA*® product line. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates safe electrification. Due to the built-in test slot, connections can be checked even when they are plugged in. This saves time, labor, and money. A range up to 55 mm can be used for the strip length.

WINSTA® MIDI solutions for your electrical installation – maintenance-free

The *WINSTA*® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, even more reliable, and error-free. Use of this pre-assembled system reduces assembly times and errors during installation at the construction site. Now you can also reduce installation costs without compromising safety and quality: The *WINSTA*® MIDI accessory eliminates the need for servicing and prevents unnecessary downtime.

- pre-assembled versions
- quick replacement of defective units during ongoing operation

Connection data

Connection 1	
Pole number	5
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	55 mm

Physical data

Width	54.6 mm / 2.15 inches
Height	17 mm / 0.669 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.376 MJ
Weight	13 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332701679
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
 			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808			



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-505

↓

Documentation

Bid Text

770-505	19.02.2019	xml 2.73 KB	↓
770-505	12.03.2015	doc 23.50 KB	↓

ausschreiben.de
770-505

↓

CAD/CAE-Data

CAD data

2D/3D Models 770-505

↓

CAE data

EPLAN Data Portal
770-505

↓

WSCAD Universe
770-505

↓

ZUKEN Portal 770-505

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white