

Data Sheet | Item Number: 770-512/041-000

Strain relief housing; 2-pole; with locking clip; for 1 cable; 7.0 ... 10.5 mm; 35 mm; white



https://www.wago.com/770-512/041-000

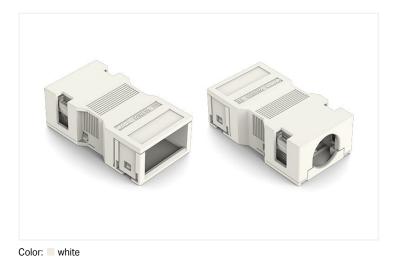

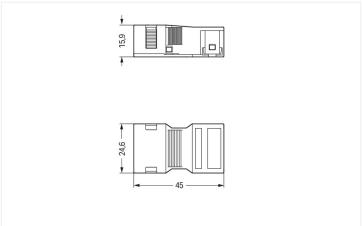

Dimensions in mm

Strain relief housing WINSTA® MIDI 2-pole

The strain relief housing from the WINSTA® MIDI product line is the sophisticated solution for reliable electrical installation. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the built-in test slot, connections can be checked even when they are plugged in. This saves time, labor, and money. The strip length is 35 mm.

Push-in CAGE CLAMP® spring pressure connection technology - pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, more reliable, and error-free. Use of this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Choose quality and durability – with protection against mismating from WAGO makes the installation of electrical components substantially easier.

- · simple circuits
- · convenient installation and commissioning

Connection data	
Connection 1	
Pole number	2
Connectable sheathed cable diameter	7 10.5 mm
Strip length (outer insulation)	35 mm

Physical data	
Width	24.6 mm / 0.969 inches
Height	15.9 mm / 0.626 inches
Depth	45 mm / 1.772 inches

Data Sheet | Item Number: 770-512/041-000

https://www.wago.com/770-512/041-000



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.192 MJ
Weight	6.7 g

Environmental requirements	
Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821137573
Customs tariff number	85389099990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search Environmental Product Compliance 770-512/041-000




Data Sheet | Item Number: 770-512/041-000

https://www.wago.com/770-512/041-000



Documentation			
Bid Text			
770-512/041-000	19.02.2019	xml 2.74 KB	\perp
770-512/041-000	12.03.2015	doc 23.50 KB	$\underline{\downarrow}$

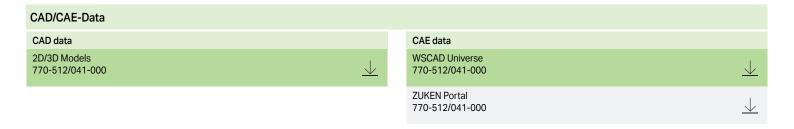

1 Compatible Products 1.1 Optional Accessories 1.1.1 Marking 1.1.1.1 Marking strip

Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

Page 3/3 Version 16.11.2023