



Data Sheet | Item Number: 294-4003

Lighting connector; push-button, external; without ground contact; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4003>

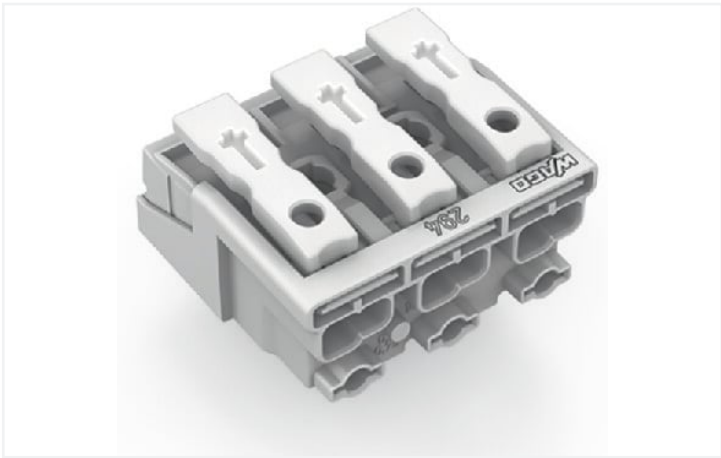

Color: white

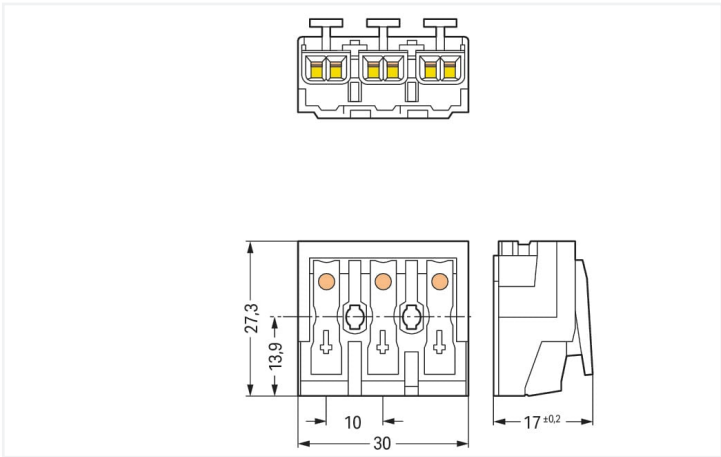

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data

Connection points	15
Total number of potentials	3
Number of connection types	4
PE function	without PE contact

Connection 1

Connection type 1	External 1
Connection technology	Push-in CAGE CLAMP®
Number of connection points	2
Actuation type	Push-button
Connectable conductor materials	Copper
Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
Pole number	3
Wiring direction	Side-entry wiring

Connection 2

Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3

Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4

Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data

Pin spacing	10 mm / 0.394 inches
Width	30 mm / 1.181 inches
Height from the surface	17 mm / 0.669 inches
Depth	27.3 mm / 1.075 inches



Mechanical data	
Marking	plain
Mounting type	without snap-in mounting feet

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.182 MJ
Halogen-free	Yes
Weight	9.2 g

Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821097600
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	edcb4cfc-7b5e-4a92-9cce-28b1fd4dc31c
SCIP notification number (Belgium)	22a14573-26b9-4966-a6bd-9dddfdd41993
SCIP notification number (Bulgaria)	1153eca4-53f2-41aa-b4af-6d173632d827
SCIP notification number (Czech Republic)	03835d69-9527-410e-97cd-2284ba6347a4
SCIP notification number (Denmark)	42216c2a-3826-4a21-95f3-410751d297f9
SCIP notification number (Finland)	3bbb526a-f22c-40c6-b7ad-b3b481401305



Environmental Product Compliance	
SCIP notification number (France)	295e44fc-9542-4585-8b1a-98c73acf9334
SCIP notification number (Germany)	00af5827-fa0d-4718-80d9-d43305f33f4a
SCIP notification number (Hungary)	08d68e75-266b-496e-8f2f-a4555a880eda
SCIP notification number (Italy)	482cfc28-e43e-4b66-a57b-e903a0c8238c
SCIP notification number (Netherlands)	625810bb-e859-482f-b2c3-ebea01c02441
SCIP notification number (Poland)	f5b7fa4f-f5ca-4a3b-be3d-94a6532dac93
SCIP notification number (Romania)	09158877-0edf-41fc-8987-35d11b9d8ab4
SCIP notification number (Sweden)	a8f572d6-5168-4f2a-9f71-34d70e2cfd91

Approvals / Certificates		
General approvals		Declarations of conformity and manufacturer's declarations
		
Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01
		EU-Declaration of Confor- mity WAGO GmbH & Co. KG
		UK-Declaration of Confor- mity WAGO GmbH & Co. KG

Downloads	
Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 294-4003	

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	294-4003	19.02.2019 xml 5.57 KB
		294-4003	13.06.2017 doc 27.00 KB

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 294-4003	WSCAD Universe 294-4003
	ZUKEN Portal 294-4003



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370

Strain relief; for 294 Series; with snap-in mounting feet; white



Item No.: 294-375

Strain relief; for 294 Series; without snap-in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool




Item No.: 206-294


Disconnection tool; green

Installation Notes

Installation




3-pole – without ground contact



Mounting hole for screw


Notice: The maximum thread diameter for self-tapping screws is 3 mm.



Hole for screw mount


Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination



EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Internal connection:

PUSH WIRE® for internal wiring with solid conductors

External connection:

Push-in CAGE CLAMP® for field-wiring with all conductor types

