




Color: ■ black

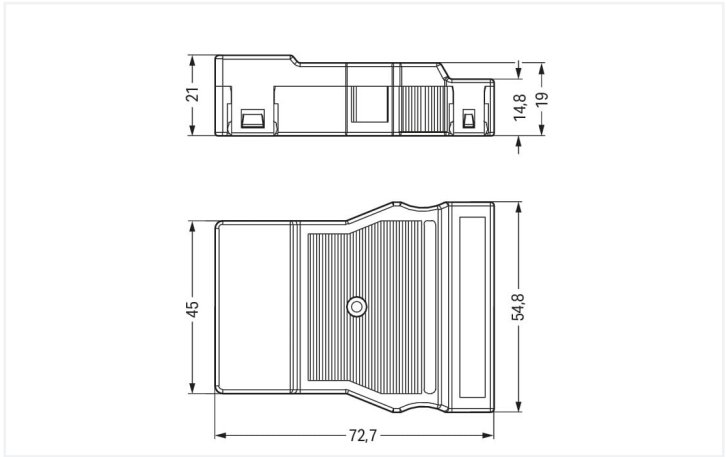

Dimensions in mm

Strain relief housing WINSTA® MIDI 5-pole

The strain relief housing from the WINSTA® MIDI product line guarantees you the maximum flexibility in electrical installation. A comprehensive range of accessories rounds out the WINSTA® product line from WAGO. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, secure, tailored electrical installation. The strip length is 71 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- for automation controllers
- quick replacement of defective units during ongoing operation

Connection data

Connection 1	
Pole number	5
Connectable sheathed cable diameter	11.5 ... 16.5 mm
Strip length (outer insulation)	71 mm

Physical data

Width	54.75 mm / 2.156 inches
Height	21 mm / 0.827 inches
Depth	72.7 mm / 2.862 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.565 MJ
Weight	19.4 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454026219
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance			↓
770-505/021-000			

Documentation			
Bid Text			
770-505/021-000	19.02.2019	xml 2.84 KB	↓
770-505/021-000	10.12.2014	doc 24.00 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models		EPLAN Data Portal	↓
770-505/021-000	↓	770-505/021-000	
		WSCAD Universe	↓
		770-505/021-000	
		ZUKEN Portal	↓
		770-505/021-000	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white