




Color: ■ gray

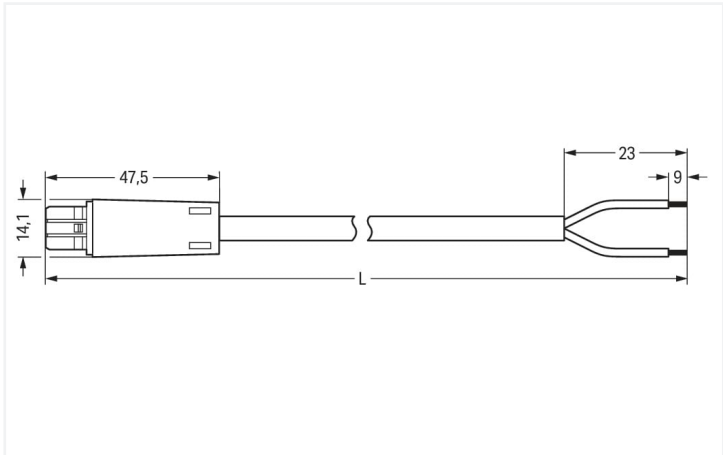

Dimensions in mm

Cable assembly WINSTA® KNX with protection against mismating

The WINSTA® KNX cable assembly with protection type IP20 supports fast, reliable installation. The pluggable installation connectors with spring pressure connection technology work completely without screw connections. They allow flexible, error-free installation in a large number of applications. The color coding and mechanical coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismating. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)). The harmonised KNX interface represents a manufacturer-independent communication protocol for intelligently networking state-of-the-art home and building system technologies. The grey WINSTA® KNX pluggable installation connectors in F coding support applications in the low-voltage range. According to the European CPR, the fire class of the cables used in construction is critical for the safety of buildings as well. For buildings with safety requirements, cable assemblies with fire class D are suitable. The cable assembly is halogen-free. This eliminates the addition of environmental pollutants during production. It also achieves a higher fire class, since halogen-free materials are flame-resistant.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable assembly is provided with a socket and a free end. The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, even more reliable, and error-free. Using this pre-assembled system reduces time spent on assembly and errors during installation at the construction site. Choose quality and durability – with protection against mismating from WAGO makes the electrical installation of electrical components significantly easier.

- saves time, since no wiring is required at the construction site
- for high-power connections for supplying power
- exact dimensions
- fast, secure installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					General information	
Ratings per		IEC/EN 60664-1			Note on contact resistance	
Overvoltage category	III	III	II		Approx. 3 mΩ contact resistance	
Pollution degree	3	2	2			
Nominal voltage	50 V	-	-			
Rated surge voltage	0.8 kV	-	-			
Rated current	3 A	-	-			



Connection data			
Total number of potentials	2	Connection 1	
Conductor preparation	stripped	Conductor diameter	0.8 mm
		Strip length	9 mm / 0.35 inches
		Pole number	2
		Sheathed cable diameter	5 ... 7 mm
		Strip length (outer insulation)	23 mm
		Connection type	Socket - free end

Physical data	
Width	14.1 mm / 0.555 inches
Height	11.1 mm / 0.437 inches
Total length	1 m

Mechanical data	
Technology	KNX
Coding	F
Variable coding	No
Marking	1+ 2-
Potential marking	1+ 2-
Mating force of a plug-in connection	Approx. 10 ... 15 N
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 15 ... 20 N
Number of mating cycles	200
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	J-Y(ST)Y...LG 1x2x0.8
Protection type	IP20; Only when mated and secured with a strain relief housing (These compact connectors are not designed for use in open, easily accessible areas.)

Plug-in connection	
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole

Material data	
Note (material data)	Information on material specifications can be found here
Color	gray
Insulation material	Polyamide (PA66)
Fire class per EN 50575	D _{ca}
Contact material	Copper alloy; surface-treated
Contact plating	Tin
Fire load	0.15 MJ
Connector color	light gray
Strain relief color	black
Sheathed cable color	gray
Printing color of sheathed cable	black
Halogen-free	Yes
Silicon-free	Yes



Material data	
Sheath material	Halogen-free
Rubber cable	No
Weight	39.7 g
Copper weight of the pipe	0.01 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143536578
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search	
Environmental Product Compliance 894-8992/123-107	

Documentation

Bid Text			
894-8992/123-107	19.02.2019	xml 3.00 KB	
894-8992/123-107	16.03.2015	doc 25.50 KB	