
Data Sheet | Item Number: 770-503/020-000

Strain relief housing; 3-pole; for 1 cable; 11.5 ... 16.5 mm; 71 mm; black

https://www.wago.com/770-503/020-000





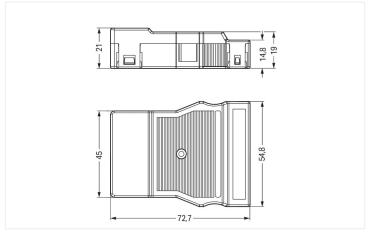

Dimensions in mm

Color: Dlack

Strain relief housing WINSTA® MIDI 3-pole

Realize your installation project easily and quickly: The strain relief housing from the WINSTA® MIDI product line is the product of your choice for error-free electrical installation. A comprehensive range of accessories complements the WINSTA® product line from WAGO. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and expense. A range up to 71 mm can be used for the strip length.

WINSTA® MIDI solutions for your electrical installation - protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Now you can also cut installation expenses without compromising safety and quality: with protection against mismating reduces the need for servicing and prevents unnecessary downtime.

- pre-assembled versions
- · convenient installation and commissioning

Connection data	
Connection 1	
Pole number	3
Connectable sheathed cable diameter	11.5 16.5 mm
Strip length (outer insulation)	71 mm

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	54.8 mm / 2.157 inches
Height	21 mm / 0.827 inches
Depth	72.7 mm / 2.862 inches

Data Sheet | Item Number: 770-503/020-000

https://www.wago.com/770-503/020-000



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Material group	1
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.594 MJ
Weight	20 g

Environmental requirements	
Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
PU (SPU)	25 pcs
Country of origin	DE
GTIN	4066966329841
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-503/020-000

Downloads



1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip

Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: $\underline{www.wago.com}$

Page 2/2 Version 16.11.2023