

pre-assembled connecting cable; Eca; Socket/open-ended; 3-pole; Cod. A; H05VV-

F 3G 1.5 mm²; 5 m; 1,50 mm²; white

https://www.wago.com/771-9993/106-502



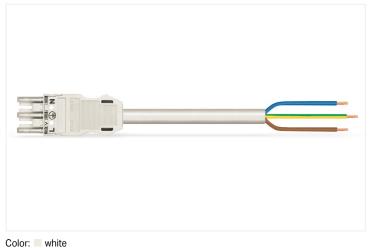

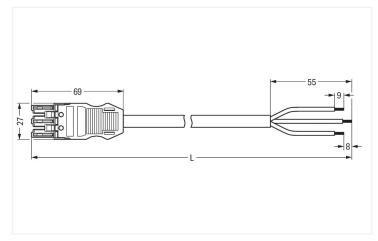

Dimensions in mm

Cable assembly WINSTA® MIDI 3-pole

The WINSTA® MIDI cable assembly A coding allows installation of solid and fine-stranded conductors. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to an enormous variety of requirements in next to no time. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismating. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with electrified elements. Standard mains applications for almost any domain of use can be realised with WINSTA® MIDI pluggable installation connectors with A coding. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy, secure, tailored electrical installation. Of course, the safety of buildings must always be ensured, even after the electrical installation has been performed. The required safety requirements in connection with EU CPR are fully satisfied by this product through fire class E.

Fast, secure pluggable connections - cable assemblies from WAGO

The cable assembly is equipped with a socket and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Now you can also lower installation expenses without compromising safety and quality: The WINSTA® MIDI pluggable installation connector with protection against mismating reduces the need for servicing and prevents unnecessary downtime

- pluggable installation connectors with protection against mismating
- for automation controllers
- · for any mains application
- · exact dimensions
- fast, secure installation

Notes	
Note	Cables with a different fire class can be found in the eShop.

Electrical data					
Ratings per	IEC	/EN 60664	-1	Ratings per UL 1977	
Overvoltage category	III	III	II	Note for the US market	Some versions may also be used for cur-
Pollution degree	3	2	2		rent interruption in accordance with the UL certificate in select applications with
Nominal voltage	250 V	-	-		currents below 16 A and voltages up to
Rated surge voltage	4 kV	-	-		600 V. For further information, please contact your local sales office.
Rated current	16 A	-	-		contact your lood outed office.

https://www.wago.com/771-9993/106-502



General information

Note on contact resistance

approx. 1 m Ω of contact resistance approx. 0.25 m Ω contact transition plug/

Connection data			
Total number of potentials	3	Connection 1	
PE function	Preceding PE contact	Strip length	9 mm / 0.35 inches
Conductor preparation	ultrasonically tip-bonded	Pole number	3
		Sheathed cable diameter	7.4 9.4 mm
		Wire cross-section	1.5 mm²
		Strip length (outer insulation)	55 mm
		Connection type	Socket - free end

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	27 mm / 1.063 inches
Height	12.9 mm / 0.508 inches
Total length	5 m

Mechanical data	
Application	General mains applications
Coding	A
Variable coding	Yes
Marking	L N
Potential marking	L N
Mating force of a plug-in connection	approx. 20 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	when unlocked: approx. 20 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	H05VV-F 3G1.5
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection	
Mismating protection	Yes
Note on mismating protection	All WINSTA® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Can be retrofitted
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Data Sheet | Item Number: 771-9993/106-502 https://www.wago.com/771-9993/106-502



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Fire class per EN 50575	E _{ca}
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	149.722 MJ
Connector color	white
Strain relief color	white
Printing color of strain relief	black
Sheathed cable color	white
Printing color of sheathed cable	black
Halogen-free	No
Silicon-free	Yes
Sheath material	PVC
Rubber cable	No
Weight	493 g
Copper weight of the pipe	0.043 kg/m

Environmental requirements	
Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4044918587655
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7355
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123834


https://www.wago.com/771-9993/106-502

Compliance 771-9993/106-502




Downloads Environmental Product Compliance Compliance Search Environmental Product

Documentation Bid Text 771-9993/106-502 xml 2.97 KB ✓ 771-9993/106-502 doc 25.00 KB ✓

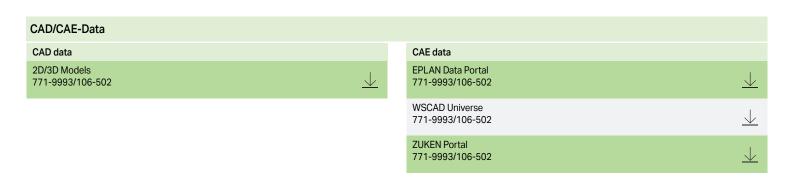



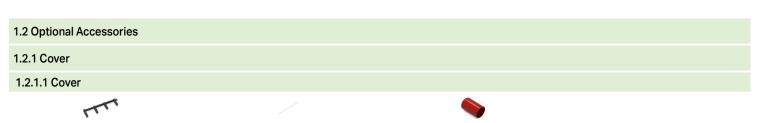

<u>Item No.: 770-201</u> Lockout cap; 12-pole, separable; for sockets; Plastic; black Item No.: 770-221 Lockout cap; 12-pole, separable; for sockets; Plastic; white Item No.: 897-2003 Protective cap; Type2; for sockets and plugs; PVC; red

https://www.wago.com/771-9993/106-502



1.2.2 Installation

1.2.2.1 Mounting accessories



<u>Item No.: 770-310</u>

Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker









Item No.: 770-450/000-006

Marker card; Plastic; blue

Item No.: 770-450/000-001 Marker card; Plastic; green Item No.: 770-450/000-012 Marker card; Plastic; orange <u>Item No.: 770-450/000-005</u> Marker card; Plastic; red



Item No.: 770-450 Marker card; Plastic; white <u>Item No.: 770-450/000-002</u> Marker card; Plastic; yellow

1.2.3.2 Marking strip



Item No.: 210-334

Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at:: $\underline{www.wago.com}$

Page 5/5 Version 15.11.2023