

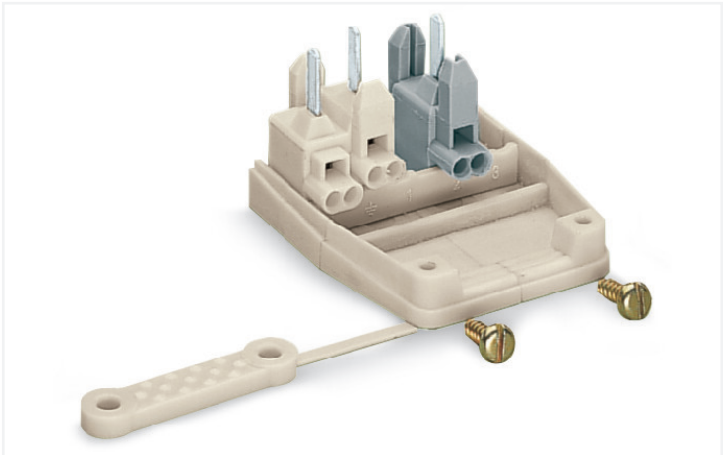


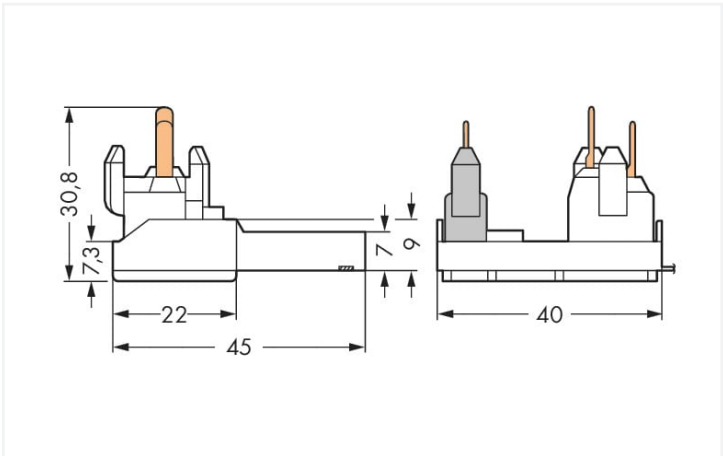

Color: ☐ white/gray

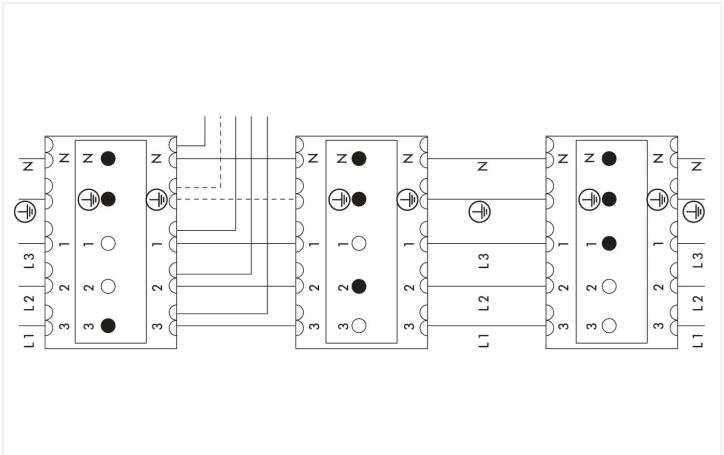

Dimensions in mm

- Flexible connection system with PUSH WIRE® connection
- Phase selection

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	400 V	-
Rated surge voltage	-	4 kV	-
Rated current	-	10 A	-

Connection data

Number of connection types	1
----------------------------	---

Connection 1	
Connection technology	PUSH WIRE®
Solid conductor	0.5 ... 1 mm² / 20 ... 18 AWG
Strip length	10 ... 11 mm / 0.39 ... 0.43 inches
Pole number	3



Physical data	
Width	45 mm / 1.772 inches
Height	30.8 mm / 1.213 inches
Depth	40 mm / 1.575 inches

Material data	
Note (material data)	Information on material specifications can be found here
Color	white/gray
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V2
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{cu})
Contact plating	Tin
Fire load	0.212 MJ
Weight	11.6 g

Environmental requirements	
Temperature stability	105 °C

Commercial data	
eCl@ss 10.0	27-44-03-14
eCl@ss 9.0	27-44-03-14
ETIM 8.0	EC000458
ETIM 7.0	EC000458
PU (SPU)	250 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4045454356255
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	70048855
UL UL International Germany GmbH	UL 1977	E45171
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61984	40029569



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 277-126			↓

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2010.85 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 277-126		EPLAN Data Portal 277-126	↓
		WSCAD Universe 277-126	↓
		ZUKEN Portal 277-126	↓