



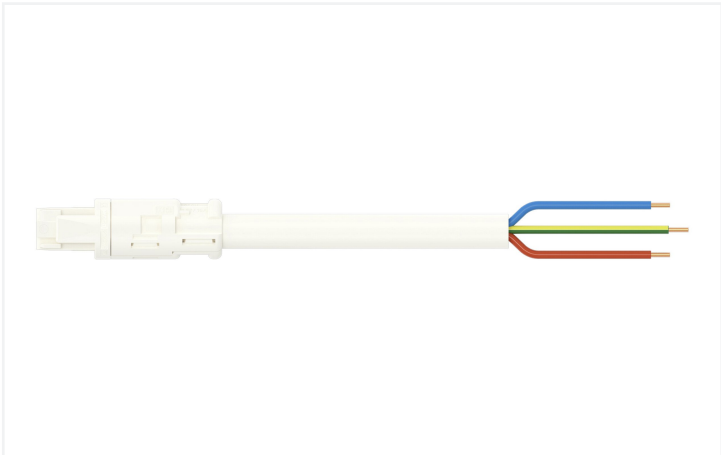

Color: ■ white

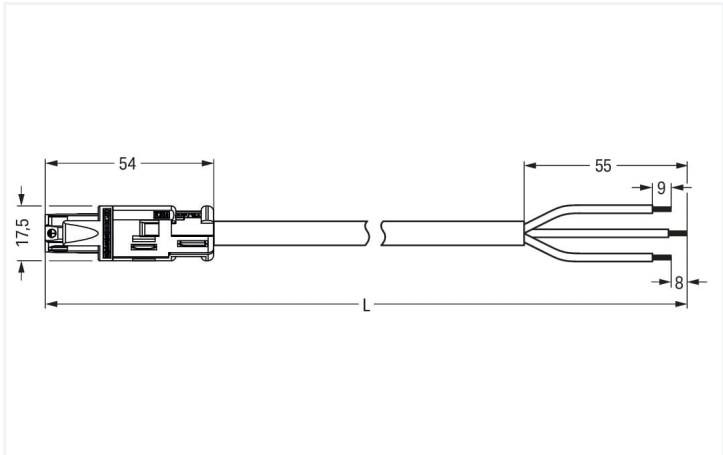

Dimensions in mm

Cable assembly *WINSTA*® RD with protection type IP20

Use effective pluggable connections instead of laborious screw connections: With the *WINSTA*® RD cable assembly 3-pole. The mechanical coding and color coding of the pluggable installation connector ensure error-free installation of the individual components – including protection against mismatching. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). With *WINSTA*® RD, we have invented a product line that fits like a glove into boreholes or conduits due to its design. This product meets all the relevant fire protection requirements of fire class E; thus it can be used in domains where fire safety is relevant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The *WINSTA*® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and consequently faster, more reliable, and error-free. Using this pre-assembled system reduces assembly times and errors during installation at the construction site. Choose durability and quality – with protection against mismatching from WAGO makes the electrical installation of electrical components visibly easier.

- effective protection against mismatching
- saves time, since no wiring is required at the construction site
- with A coding for a large number of uses
- ready for immediate use
- convenient installation and commissioning

Notes		
Note	Cables with a different fire class can be found in the eShop.	

Electrical data						
Ratings per		IEC/EN 60664-1			General information	
Overvoltage category	III	III	II		Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
Pollution degree	3	2	2			
Nominal voltage	250 V	-	-			
Rated surge voltage	4 kV	-	-			
Rated current	16 A	-	-			

Connection data

Total number of potentials	3
PE function	Preceding PE contact
Conductor preparation	ultrasonically tip-bonded

Connection 1

Strip length	9 mm / 0.35 inches
Pole number	3
Sheathed cable diameter	7.4 ... 9.4 mm
Wire cross-section	1.5 mm ²
Strip length (outer insulation)	55 mm
Connection type	Socket - free end

Physical data

Width	17.5 mm / 0.689 inches
Height	17.5 mm / 0.689 inches
Total length	2 m

Mechanical data

Application	General mains applications
Coding	A
Variable coding	No
Marking	L N
Mating force of a plug-in connection	Approx. 30 ... 70 N (depending on pole number)
Retention force of a plug-in connection	when locked: > 80N
Unmating force of a plug-in connection	Unlocked: approx. 30 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Connection type	Socket - free end
Type of pre-assembled cable	Connecting cable
Cable type	H05VV-F 3G1.5
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All <i>W/INSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while incorrectly rotated c.) plugging while laterally staggered
Locking lever	Yes
Locking of plug-in connection	Locking lever

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Fire class per EN 50575	E _{ca}
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	59.444 MJ
Connector color	white
Strain relief color	white
Sheathed cable color	white
Printing color of sheathed cable	black
Halogen-free	No
Silicon-free	Yes



Material data	
Sheath material	PVC
Rubber cable	No
Weight	204.3 g
Copper weight of the pipe	0.043 kg/m

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Cable for temperatures ≤ 70 °C (including halogen-free) Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-04
eCl@ss 9.0	27-44-06-04
ETIM 8.0	EC002587
ETIM 7.0	EC002587
PU (SPU)	1 pcs
Packaging type	unpacked
Country of origin	DE
GTIN	4055143522748
Customs tariff number	85444290900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals		Declarations of conformity and manufacturer's declarations																														
CCA CCA CCA    <table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>CCA DEKRA Certification B.V.</td><td>-</td><td>NTR NL 6374</td></tr><tr><td>CCA DEKRA Certification B.V.</td><td>EN 61535</td><td>NTR NL-7969</td></tr><tr><td>CCA DEKRA Certification B.V.</td><td>EN 61984</td><td>NTR NL-7848</td></tr><tr><td>KEMA/KEUR DEKRA Certification B.V.</td><td>EN 61535</td><td>71-123229</td></tr><tr><td>KEMA/KEUR DEKRA Certification B.V.</td><td>EN 61984</td><td>71-114944</td></tr><tr><td>KEMA/KEUR DEKRA Certification B.V.</td><td>-</td><td>2118353.01</td></tr></table>		Approval	Standard	Certificate Name	CCA DEKRA Certification B.V.	-	NTR NL 6374	CCA DEKRA Certification B.V.	EN 61535	NTR NL-7969	CCA DEKRA Certification B.V.	EN 61984	NTR NL-7848	KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123229	KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-114944	KEMA/KEUR DEKRA Certification B.V.	-	2118353.01	<table><tr><th>Approval</th><th>Standard</th><th>Certificate Name</th></tr><tr><td>EU-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr><tr><td>UK-Declaration of Confor- mity WAGO GmbH & Co. KG</td><td>-</td><td>-</td></tr></table>	Approval	Standard	Certificate Name	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
Approval	Standard	Certificate Name																														
CCA DEKRA Certification B.V.	-	NTR NL 6374																														
CCA DEKRA Certification B.V.	EN 61535	NTR NL-7969																														
CCA DEKRA Certification B.V.	EN 61984	NTR NL-7848																														
KEMA/KEUR DEKRA Certification B.V.	EN 61535	71-123229																														
KEMA/KEUR DEKRA Certification B.V.	EN 61984	71-114944																														
KEMA/KEUR DEKRA Certification B.V.	-	2118353.01																														
Approval	Standard	Certificate Name																														
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																														
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-																														



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance			↓
774-9993/106-202			

Documentation			
Bid Text			
774-9993/106-202	19.02.2019	xml 3.02 KB	↓
774-9993/106-202	07.01.2015	doc 23.50 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models		EPLAN Data Portal	↓
774-9993/106-202	↓	774-9993/106-202	
		WSCAD Universe	↓
		774-9993/106-202	
		ZUKEN Portal	↓
		774-9993/106-202	