




Data Sheet | Item Number: 770-7105

Linect® T-connector; 5-pole; Cod. I; 1 input; 2 outputs; blue

<https://www.wago.com/770-7105>

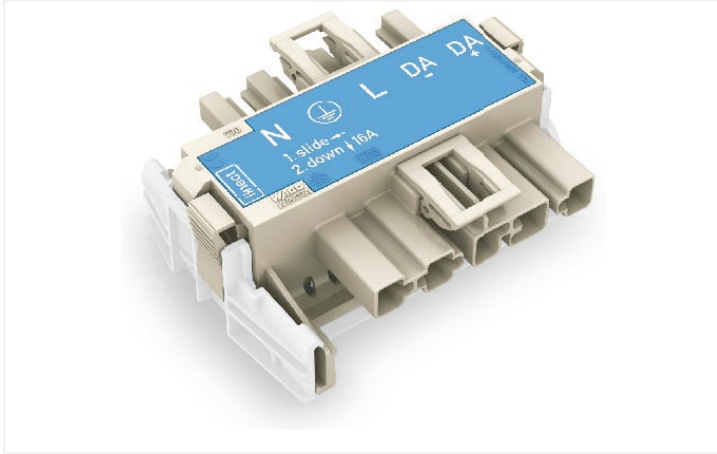

Color: ■ blue

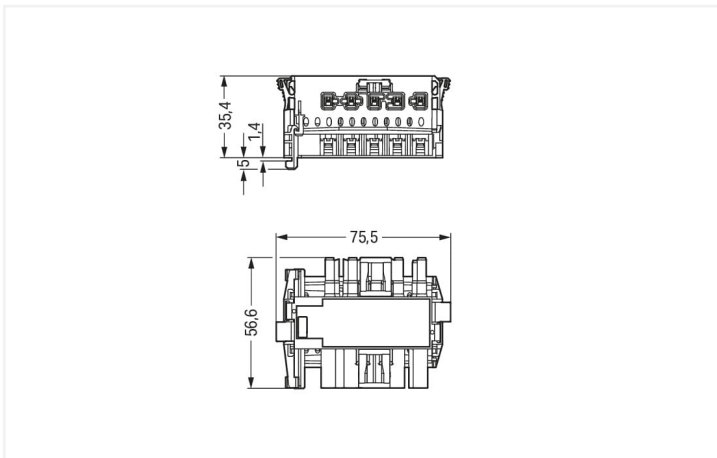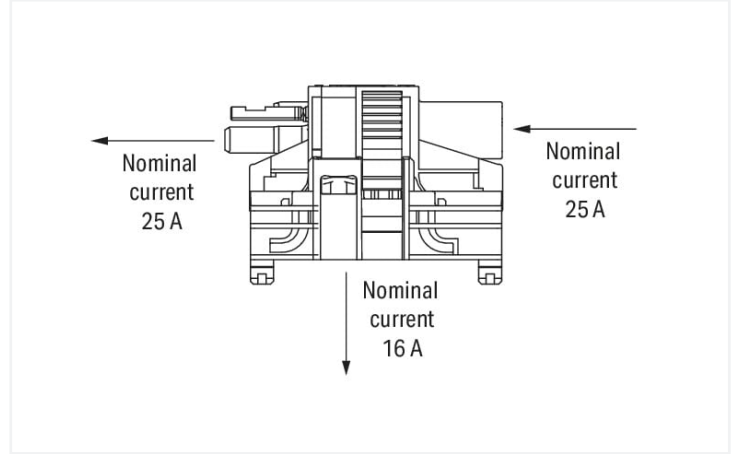

Dimensions in mm

Distribution connector WINSTA® MIDI I coding

The WINSTA® MIDI distribution connector I coding is the pluggable solution for your application in control cabinets, on PCBs or for lighting connections. On PCBs, in control cabinets or for connecting lights – pluggable installation connectors from WAGO allow you to make connections according to many different requirements in next to no time. For greater protection in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). This means that users' fingers will never come into contact with live elements. Controlled lighting, as implemented with the DALI standard, for example, is the primary domain of use of WINSTA® MIDI pluggable installation connectors with I coding. This pluggable installation connector can be employed for a load of up to 25 A. Therefore, it can also be used for high power loads. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is used in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Choose quality and durability – the WINSTA® MIDI pluggable installation connector with protection against mismatching from WAGO makes the installation of electrical components visibly easier.

- protection against mismatching eliminates errors
- pre-assembled versions
- for intelligent, easy lighting installation
- ready to install and use immediately
- quick replacement of defective units during ongoing operation

Electrical data

Ratings per	IEC/EN 60664-1		
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	400 V	-	-
Rated surge voltage	6 kV	-	-
Rated current	25 A	-	-

Ratings per IEC/EN 2

Rated current 2	16 A
-----------------	------

Approvals per

UL 1977

Rated voltage	600 V
Rated current	23 A

General information

Note on contact resistance	approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket
----------------------------	--

Connection data

Total number of potentials	5
PE function	Preceding PE contact

Connection 1

Pole number	5
-------------	---

Physical data

Pin spacing	10 mm / 0.394 inches
Width	75.5 mm / 2.972 inches
Height	40.5 mm / 1.594 inches
Depth	56.6 mm / 2.228 inches

Mechanical data

Application	DALI, Lighting Management
Coding	I
Variable coding	No
Marking	N L DA- DA+
Potential marking	N L DA- DA+
Mating force of a plug-in connection	Approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	When locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Type of distribution box	Linect® T-connector
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).



Material data	
Note (material data)	Information on material specifications can be found here
Color	blue
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.922 MJ
Weight	41.2 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-02
eCl@ss 9.0	27-44-06-02
ETIM 8.0	EC002566
ETIM 7.0	EC002566
PU (SPU)	20 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821000402
Customs tariff number	85366990990

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	aa3b6b25-f159-40f1-a839-e1990ac0087b
SCIP notification number (Belgium)	bcf0ed1b-d2a6-4a15-91c2-45ae1524391f
SCIP notification number (Bulgaria)	dbdffb0b-896d-4af5-b33e-5eb27c5db145
SCIP notification number (Czech Republic)	8052bba5-64ab-4f5a-8b8d-f6681f6ea87f
SCIP notification number (Denmark)	d826f846-ffc0-45ec-8f78-7bfa92767954
SCIP notification number (Finland)	869c621f-fad1-4816-939a-47b54190a9d5
SCIP notification number (France)	d37e6c09-29cc-4a56-be50-cbb191446213
SCIP notification number (Germany)	5ebc786a-dbd2-4400-bb7c-e0c1fa629f38
SCIP notification number (Hungary)	7213a003-02ce-44cd-bdc2-6e6d9383b7bf
SCIP notification number (Italy)	2ecf5e19-e915-48cd-9818-4af8aff3683a
SCIP notification number (Netherlands)	c18f3f94-d952-49e5-9bb3-ddb3e09e3002
SCIP notification number (Poland)	6dceed6d-7204-4b16-a37f-b18fb3105e39
SCIP notification number (Romania)	3454d912-995e-4c6d-9a6c-d48de76b0dde



Environmental Product Compliance

SCIP notification number (Sweden)

098d4581-1b9b-42d8-aea6-2a13e298b5df

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1059	E 45172
VDE VDE Prüf- und Zertifizie- rungsinstitut	EN 61535	40029808

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 770-7105



Documentation

Bid Text			
770-7105	19.02.2019	xml 2.90 KB	
770-7105	02.12.2014	doc 23.50 KB	
ausschreiben.de 770-7105			

CAD/CAE-Data

CAD data
2D/3D Models 770-7105



CAE data
WSCAD Universe 770-7105



1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



Item No.: 771-9985/206-102
pre-assembled connecting cable; Eca; Plug/open-ended; 5-pole; Cod. I; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; blue

Item No.: 771-9985/106-102
pre-assembled connecting cable; Eca; Socket/open-ended; 5-pole; Cod. I; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; blue

Item No.: 771-9985/006-102
pre-assembled interconnecting cable; Eca; Socket/plug; 5-pole; Cod. I; H05VV-F 5G 1.5 mm²; 1 m; 1,50 mm²; blue

1.1.2 Female connector/socket



Item No.: 770-1105
Socket; 5-pole; Cod. I; 4,00 mm²; blue

Item No.: 770-1105/022-000
Socket; with strain relief housing; 5-pole; Cod. I; 4,00 mm²; blue

1.1.3 Field-wiring terminal block with Linect®



Item No.: 294-8135
Lighting connector; push-button, external; for Linect®; with direct ground contact; DA+ DA- L PE N; 5-pole; Cod. I; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

Item No.: 294-8035
Lighting connector; push-button, external; for Linect®; without ground contact; DA+ DA- L PE N; 5-pole; Cod. I; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

1.1.4 Male connector/plug



Item No.: 770-1115
Plug; 5-pole; 4,00 mm²; blue

Item No.: 770-1115/022-000
Plug; with strain relief housing; 5-pole; Cod. I; 4,00 mm²; blue

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-201
Lockout cap; 12-pole, separable; for sockets; Plastic; black

Item No.: 770-221
Lockout cap; 12-pole, separable; for sockets; Plastic; white

Item No.: 770-360
Lockout cap; for plugs; 5-pole; separable; yellow