


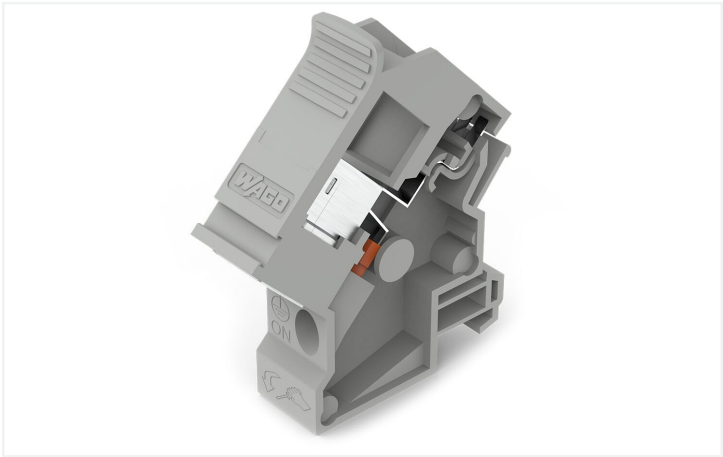

Electrical data	
Specialty functions	With shield connection

Safety and protection	
Protection type	IP20

Connection data			
Mating cycles	750	Connection 1	
Connection cable	Cat. 6A (min.)	Connector	RJ-45 (shielded)
		Pole number 1	8
		Connection type 1	System

Connection 2	
Connector 2	RJ-45 (shielded)
Pole number 2	8
Connection type 2	System

Physical data	
Width	18 mm / 0.709 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	59 mm / 2.323 inches



Mechanical data		
Mounting type		DIN-35 rail
Housing design		Mounting carrier
Mating cycles		750

Material data		
Contact material (connector)		Spring steel
Fire load		0 MJ
Weight		34 g

Environmental requirements		
Ambient temperature (operation)		-10 ... +60 °C
Ambient temperature (storage)		-40 ... +70 °C
Relative humidity		≤ 95% (non-condensing)

Commercial data		
ETIM 8.0		EC002780
ETIM 7.0		EC002780
PU (SPU)		1 pcs
Packaging type		Bag
Country of origin		PL
GTIN		4066966083491
Customs tariff number		85369010000

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance 289-198		

Documentation			
Bid Text			
289-198	xml	3.68 KB	
289-198	docx	14.79 KB	



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 289-198	EPLAN Data Portal 289-198