




Color: ■ black

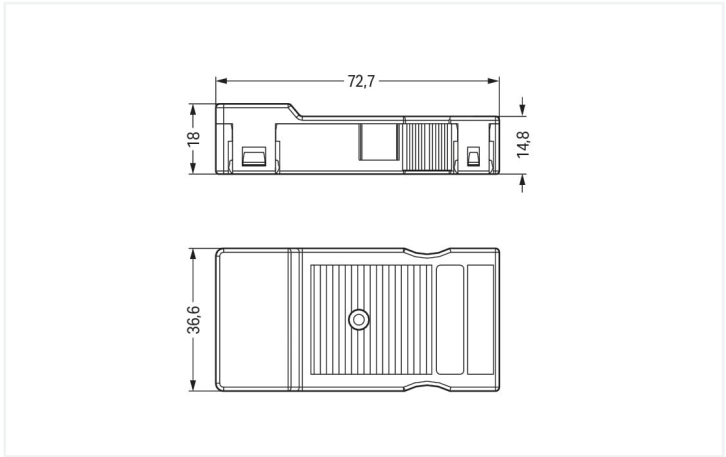

Dimensions in mm

Strain relief housing WINSTA® MIDI 3-pole

The strain relief housing from the WINSTA® MIDI product line guarantees you the maximum flexibility in electrical installation. With WAGO, you benefit from a large selection of expansions for the WINSTA® product line. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Thanks to the included test slot, connections can be checked even when they are plugged in. This saves time, labor, and money. The strip length is 71 mm.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and thus more efficient, more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- for automation controllers
- convenient installation and commissioning

Connection data

Connection 1	
Pole number	3
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	71 mm

Physical data

Width	34.6 mm / 1.362 inches
Height	15 mm / 0.591 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.514 MJ
Weight	15.7 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454026196
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates					
General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance			↓
770-503/021-000			

Documentation			
Bid Text			
770-503/021-000	19.02.2019	xml 2.84 KB	↓
770-503/021-000	04.12.2014	doc 24.00 KB	↓

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models		EPLAN Data Portal	↓
770-503/021-000	↓	770-503/021-000	
		WSCAD Universe	↓
		770-503/021-000	
		ZUKEN Portal	↓
		770-503/021-000	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white