



Data Sheet | Item Number: 770-764

Snap-in socket; 4-pole; Cod. B; 4,00 mm²; light green


<https://www.wago.com/770-764>

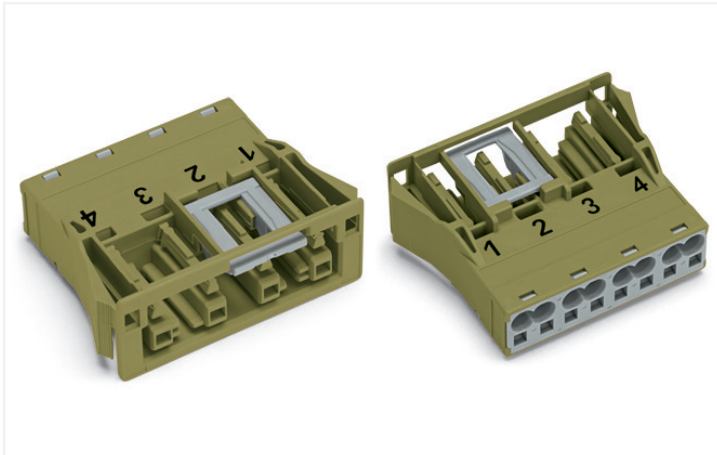

Color: ■ light green

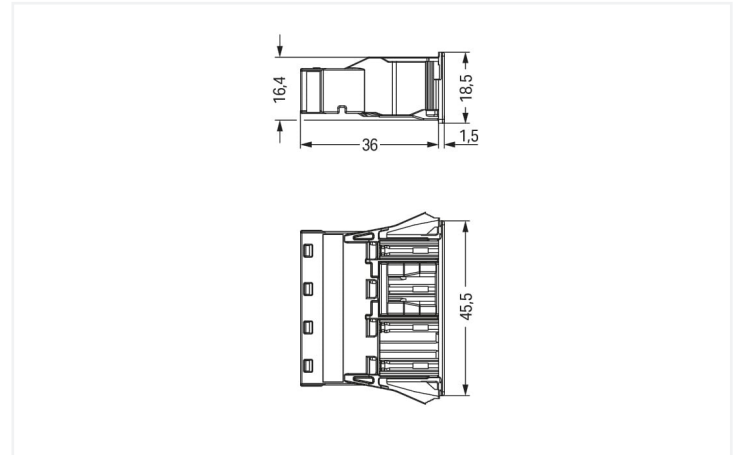

Dimensions in mm

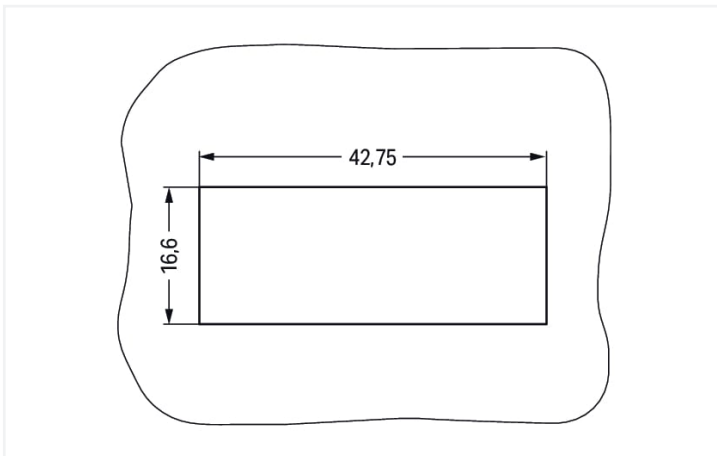

Dimensions in mm

Plate thickness: 0.5 ... 2 mm

Cutout tolerance: + 0.1 mm

Please note!

Female connector/socket *WINSTA*® MIDI with protection type IP20

The *WINSTA*® MIDI female connector/socket rated current 25 A provides the foundation for assembly of fine-stranded and solid conductors. WAGO pluggable installation connectors are useful when criteria repeat or are distributed on a specific pattern, for example for installing grid lighting or flush-mount lighting. For greater security in electrical installations, the pluggable installation connector is provided with mechanical protection against mismatching. The pluggable installation connector is protected in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). That results in the fact that users' fingers will never come into contact with electrified elements. Pluggable installation connectors with B coding from the *WINSTA*® MIDI line are available in gray, light green, or pink, allowing you to distinguish different circuits, for example for pumps, lighting, or sun blinds. Your own pole marking is possible as well. This pluggable installation connector can be used for a current load of up to 25 A. As a result, it can also be used for high power loads. The *WINSTA*® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Due to the integrated test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA*® MIDI

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Now you can also lower installation costs without compromising safety and quality: with marking reduces the need for servicing and prevents unnecessary downtime.

- effective protection against mismatching
- for automation controllers
- with B coding for controllers such as lighting fixtures and sun blinds
- exact dimensions
- convenient installation and commissioning



Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).
Variants:	Other pole markings Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		400 V	-	-
Rated surge voltage		6 kV	-	-
Rated current		25 A	-	-
Approvals per		UL 1977		
Rated voltage		600 V		
Rated current		23 A		
General information				
Note on contact resistance		approx. 1 mΩ of contact resistance approx. 0.25 mΩ contact transition plug/ socket		

Connection data																												
Connection points	8	Connection 1 <table><tr><td>Connection technology</td><td>Push-in CAGE CLAMP®</td></tr><tr><td>Actuation type</td><td>Operating tool Push-in</td></tr><tr><td>Nominal cross-section</td><td>4 mm² / 12 AWG</td></tr><tr><td>Solid conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Solid conductor; push-in termination</td><td>1.5 ... 4 mm² / 16 ... 12 AWG</td></tr><tr><td>Stranded conductor</td><td>0.5 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor</td><td>0.5 ... 4 mm² / 20 ... 12 AWG</td></tr><tr><td>Fine-stranded conductor; with insulated ferrule</td><td>0.25 ... 1.5 mm² / 20 ... 16 AWG</td></tr><tr><td>Fine-stranded conductor; with uninsulated ferrule</td><td>0.25 ... 2.5 mm² / 20 ... 14 AWG</td></tr><tr><td>Fine-stranded conductor; with ferrule; push-in termination</td><td>1.5 mm² / 16 AWG</td></tr><tr><td>Strip length</td><td>9 mm / 0.35 inches</td></tr><tr><td>Pole number</td><td>4</td></tr><tr><td>Conductor entry direction to mating direction</td><td>0 °</td></tr></table>	Connection technology	Push-in CAGE CLAMP®	Actuation type	Operating tool Push-in	Nominal cross-section	4 mm² / 12 AWG	Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG	Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG	Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG	Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG	Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG	Strip length	9 mm / 0.35 inches	Pole number	4	Conductor entry direction to mating direction	0 °
Connection technology	Push-in CAGE CLAMP®																											
Actuation type	Operating tool Push-in																											
Nominal cross-section	4 mm² / 12 AWG																											
Solid conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Solid conductor; push-in termination	1.5 ... 4 mm² / 16 ... 12 AWG																											
Stranded conductor	0.5 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor	0.5 ... 4 mm² / 20 ... 12 AWG																											
Fine-stranded conductor; with insulated ferrule	0.25 ... 1.5 mm² / 20 ... 16 AWG																											
Fine-stranded conductor; with uninsulated ferrule	0.25 ... 2.5 mm² / 20 ... 14 AWG																											
Fine-stranded conductor; with ferrule; push-in termination	1.5 mm² / 16 AWG																											
Strip length	9 mm / 0.35 inches																											
Pole number	4																											
Conductor entry direction to mating direction	0 °																											
Total number of potentials	4																											

Physical data	
Pin spacing	10 mm / 0.394 inches
Width	45.5 mm / 1.791 inches
Height	18.5 mm / 0.728 inches
Depth	37.5 mm / 1.476 inches

Mechanical data

Application	Control technology
Coding	B
Variable coding	Yes
Marking	1 2 3 4
Potential marking	1 2 3 4
Mating force of a plug-in connection	approx. 20 ... 70 N (depending on pole number)
Retention force of a plug-in connection	Locked: > 80 N
Unmating force of a plug-in connection	Unlocked: approx. 20 ... 70 N (depending on pole number)
Number of mating cycles	200, without resistive load
Housing sheet thickness	0.5 ... 2 mm / 0.02 ... 0.079 inches
Mounting type	Snap-in flange
Protection type	IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)

Plug-in connection

Contact type (pluggable connector)	Female connector/socket
Connector (connection type)	for conductor
Mismating protection	Yes
Note on mismating protection	All <i>WINSTA</i> ® components are 100% protected against mismating when: a.) plugging different numbers of poles b.) plugging while rotated 180 c.) plugging while laterally staggered d.) plugging one pole
Locking lever	Yes
Locking of plug-in connection	Locking lever
Note on locking system	All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket).

Material data

Note (material data)	Information on material specifications can be found here
Color	light green
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Copper or copper alloy; surface-treated
Contact plating	Tin
Fire load	0.314 MJ
Weight	15.5 g

Environmental requirements

Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C



Commercial data		
Product Group	20 (Winsta)	
eCl@ss 10.0	27-44-06-02	
eCl@ss 9.0	27-44-06-02	
ETIM 8.0	EC002566	
ETIM 7.0	EC002566	
PU (SPU)	100 pcs	
Packaging type	Box	
Country of origin	DE	
GTIN	4050821445760	
Customs tariff number	85366990990	

Environmental Product Compliance		
RoHS Compliance Status	Compliant, No Exemption	

Approvals / Certificates

General approvals			Declarations of conformity and manufacturer's declarations		
  			Approval	Standard	Certificate Name
CCA DEKRA Certification B.V.	IEC 61984	NL-32104	EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
CCA DEKRA Certification B.V.	EN 61984	2173495.01	UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
cURus Underwriters Laboratories Inc.	UL 1977	E45171			
cURus Underwriters Laboratories Inc.	UL 1059	E 45172			

Approvals for marine applications

  		
Approval	Standard	Certificate Name
ABS American Bureau of Ship- ping	-	19-HG1868589-PDA
DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-764

Download icon

Documentation				
Bid Text				
770-764	19.02.2019	xml	2.92 KB	Download icon
770-764	08.06.2015	doc	23.00 KB	Download icon

CAD/CAE-Data

CAD data

2D/3D Models 770-764

Download icon

CAE data

EPLAN Data Portal 770-764

Download icon

WSCAD Universe 770-764

Download icon

ZUKEN Portal 770-764

Download icon

1 Compatible Products

1.1 System counterpart

1.1.1 Cable assembly



[Item No.: 771-9994/205-105](#)
pre-assembled connecting cable; Eca; Plug/open-ended; 4-pole; Cod. B; Control cable 4 x 1.0 mm²; 1 m; 1,00 mm²; light green

[Item No.: 771-9994/005-105](#)
pre-assembled interconnecting cable; Eca; Socket/plug; 4-pole; Cod. B; H05VV-F 4 x 1.0 mm²; 1 m; 1,00 mm²; light green

1.1.2 Male connector/plug

[Item No.: 770-274](#)
Plug; 4-pole; Cod. B; 4,00 mm²; light green

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-201
Lockout cap; 12-pole, separable; for sockets; Plastic; black



Item No.: 770-221
Lockout cap; 12-pole, separable; for sockets; Plastic; white



Item No.: 770-644
Lockout cap; 4-pole; for cutouts; Plastic; black



Item No.: 770-694
Lockout cap; 4-pole; for cutouts; Plastic; white


1.2.2 Tool

1.2.2.1 Operating tool



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft


Installation Notes




We recommend pulling the pre-latched strain relief housing over the cable prior to termination. However, the strain relief can be mounted at a later time as well.



- 1. Strip length, outer insulation = 35 mm (2-pole), 55 mm (3- to 5-pole)
- 2. Strip length = 9 mm
- 3. Extended ground conductor = 8 mm




To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.



Insert the stripped solid conductor until it hits the backstop.



To terminate fine-stranded conductors, open the clamping unit via screwdriver (2.5 mm blade width) and insert a stripped conductor until it hits the backstop.



To remove the conductor, actuate the clamp via screwdriver (2.5 mm blade width) and pull out the conductor.