




Color: ■ white

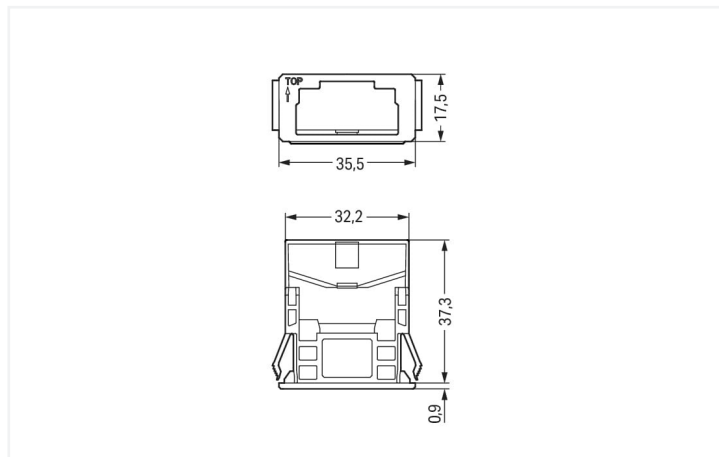

Dimensions in mm

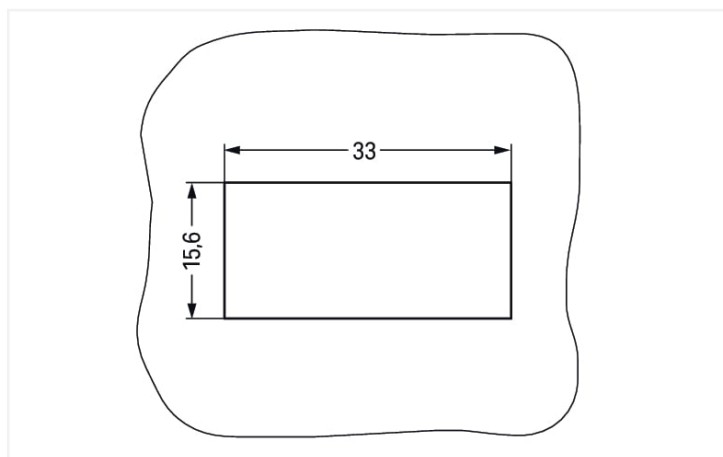


Plate thickness: 1 ... 3 mm
Cutout tolerance: + 0.1 mm

Please see note below!

Mounting accessories WINSTA® MIDI 3-pole

The mounting accessories from the WINSTA® MIDI product line guarantees you the greatest possible flexibility in electrical installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the integrated test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

The WINSTA® Pluggable Connection System is ideally tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Using this pre-assembled system reduces assembly times and installation errors at the construction site. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MIDI accessories with protection against mismatching from WAGO.

- pre-assembled versions
- quick replacement of defective units during ongoing operation



Notes	
Note	The snap-in connectors must be relieved of tensile and transverse forces. A surface finish can influence the edge radius of the cutouts. This may affect the snap-in socket fit, so ensure an adequate fit before use. In addition, the punched edge should be on the inside for punched cutouts. The wings of the snap-in connectors must not be mechanically stressed for a long period before use (e.g., due to a pre-locking position).

Connection data	
Connection 1	
Pole number	3

Physical data	
Width	35.5 mm / 1.398 inches
Height	17.5 mm / 0.689 inches
Depth	38.75 mm / 1.526 inches

Mechanical data	
Housing sheet thickness	1 ... 3 mm / 0.039 ... 0.118 inches
Mounting type	Snap-in flange
Suitable	for socket and plug

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.098 MJ
Weight	3.3 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	100 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055144020847
Customs tariff number	85366990990



Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

Approvals / Certificates

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-338

↓

Documentation			
Bid Text			
770-338	19.02.2019	xml 2.57 KB	↓
770-338	04.12.2014	doc 23.00 KB	↓



CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 770-338	WSCAD Universe 770-338
↓	↓
	ZUKEN Portal 770-338
	↓

1 Compatible Products
1.1 Optional Accessories
1.1.1 Locking system
1.1.1.1 Locking system



Item No.: 770-140
Locking lever; for sockets and plugs; for tool operation; gray

Installation Notes
Installation



Insert the socket or plug into the frame (observe the "TOP" marking on the frame!), then snap the assembled unit into the cutout.

Snap the assembled unit into the cutout.