


Data Sheet | Item Number: 770-515

Strain relief housing; 5-pole; for 2 cables; 9.0 ... 13.0 mm; 55 mm; white

<https://www.wago.com/770-515>



Color:  white

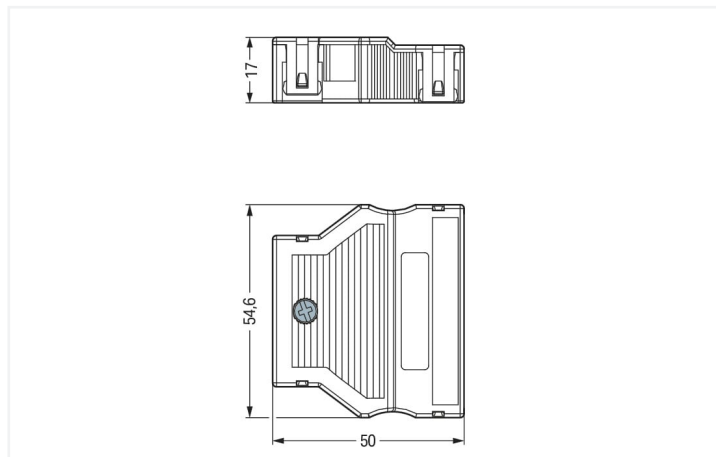

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 5-pole

Put your trust in tried-and-tested accuracy for the electrical installation in your project: The strain relief housing from the *WINSTA®* MIDI product line. With *WAGO*, you benefit from a large selection of expansions for the *WINSTA®* product line. Our *WINSTA®* MIDI product line guarantees flexibility for the installation of applications. With its Push-in *CAGE CLAMP®* spring pressure connection technology, it ensures error-free, time-saving installation and offers customization for meeting an enormous variety of installation requirements. A range up to 55 mm can be used for the strip length.

Lower costs through fast commissioning and elimination of service expenses – solutions from WINSTA® MIDI

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Choose quality and durability – with protection against mismating from WAGO makes the installation of electrical components visibly easier.

- pre-assembled versions
- convenient installation and commissioning

Connection data

Connection 1

Pole number	5
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	55 mm

Physical data

Width	54.6 mm / 2.15 inches
Height	17 mm / 0.669 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.359 MJ
Weight	12.5 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332754002
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
 			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA
VDE VDE Prüf- und Zertifizierungsinstitut	EN 61535	40029808			



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance 770-515			

Documentation			
Bid Text			
770-515	19.02.2019	xml 2.73 KB	
770-515	12.03.2015	doc 23.50 KB	
ausschreiben.de 770-515			

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models 770-515		EPLAN Data Portal 770-515	
		WSCAD Universe 770-515	
		ZUKEN Portal 770-515	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Marking
1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white