Data Sheet | Item Number: 890-512/342-000


Strain relief housing; 2-pole; with locking clip; for 1 cable; 3.8 ... 8.2 mm; 17.5 mm; white

white

https://www.wago.com/890-512/342-000





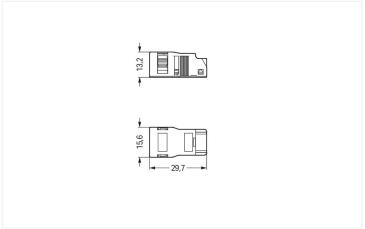

Dimensions in mm

Strain relief housing WINSTA® MINI 2-pole

Realize the electrical installation easily and quickly: The strain relief housing from the WINSTA® MINI product line is the product of your choice for quick, straightforward installation. A comprehensive range of accessories complements the WINSTA® product line from WAGO. WINSTA® MINI satisfies the demand for miniaturisation. Our smallest pluggable connection system is especially suitable for lights, for instance, since as a result of LED technology; due to complex systems, these offer less and less space for the connection technology. The strip length is 17.5 mm.

WINSTA® MINI solutions for your electrical installation - protected against mismating and maintenance-free

The WINSTA® Pluggable Connection System is perfectly tailored to the strict requirements of building installation. It makes electrical installation pluggable, and thus faster, even more reliable, and error-free. Use of this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Choose quality and durability – with protection against mismating from WAGO makes the electrical installation of electrical components significantly easier.

· consistent IP40 protection

Strip length (outer insulation)

· rapid, structured electrical installation

Connection data Connection 1 Pole number 2 Connectable sheathed cable diameter 3.8 ... 8.2 mm

17.5 mm

Physical data	
Width	15.6 mm / 0.614 inches
Height	13.2 mm / 0.52 inches
Depth	29.7 mm / 1.169 inches

Data Sheet | Item Number: 890-512/342-000 https://www.wago.com/890-512/342-000



Material data	
Note (material data)	Information on material
	specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Fire load	0.065 MJ
Weight	2.1 g

Environmental requirements	
Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4050821765547
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption


Downloads
Environmental Product Compliance
Compliance Search
Environmental Product Compliance 890-512/342-000

Documentation			
Bid Text			
890-512/342-000	19.02.2019	xml 2.84 KB	<u>↓</u>
890-512/342-000	03.12.2014	doc 23.50 KB	$\underline{\downarrow}$

Data Sheet | Item Number: 890-512/342-000

https://www.wago.com/890-512/342-000



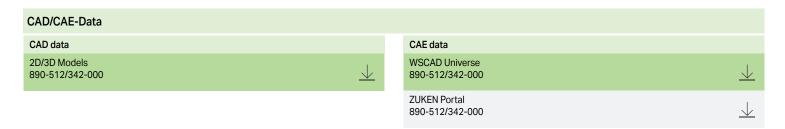

Subject to changes. Please also observe the further product documentation!