
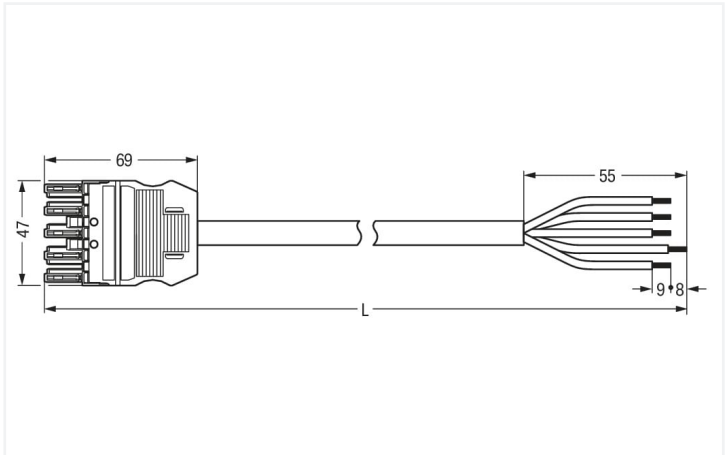


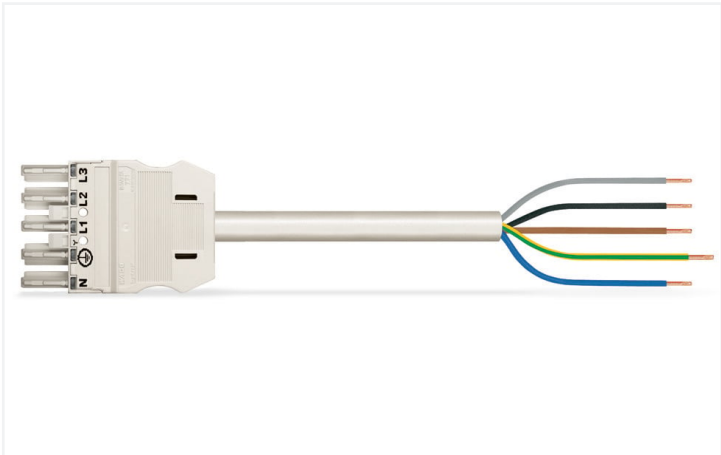

Dimensions in mm

Cable assembly WINSTA® MIDI with strain relief

The WINSTA® MIDI cable assembly with protection against mismatching provides the foundation for assembly of fine-stranded and solid conductors. Our pluggable installation connectors with spring pressure connection technology function entirely without screw connections. They allow fast, efficient, error-free installation in numerous possible uses. For greater protection in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismatching. The pluggable installation connector is protected against ingress by solid objects in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). The WINSTA® MIDI pluggable installation connector with A coding in black or white is usually used for general mains applications in power distribution. This pluggable installation connector is designed for a voltage load of up to 20 A. As a result, it can also be used for high power loads. Our WINSTA® MIDI product line achieves maximum flexibility for the installation of applications. With its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees time-saving, error-free installation and offers customization for meeting all installation requirements. If you need to meet stricter safety standards, you should use cables with fire class C. These are suitable for use in buildings with primarily high demands on safety. In the production of this cable assembly, halogens were deliberately omitted. This is an important contribution to climate protection.

Fast, error-free assembly thanks to cable assemblies from WAGO

The cable assembly is equipped with a socket and a free end. The WINSTA® Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and therefore faster, more reliable, and error-free. Use of this pre-assembled system decreases assembly times and installation errors at the construction site. Now you can also cut installation expenses without compromising safety and quality: The WINSTA® MIDI pluggable installation connector with strain relief hosting reduces the need for servicing and prevents unnecessary downtime.

- effective protection against mismatching
- simple circuits
- with A coding for a great number of uses
- flexible installation to save space
- quick replacement of defective units during ongoing operation

| Notes |                                                               |
|-------|---------------------------------------------------------------|
| Note  | Cables with a different fire class can be found in the eShop. |

| Electrical data        |  |                                                                                                                                                                                                                                          |     |    |
|------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|
| Ratings per            |  | IEC/EN 60664-1                                                                                                                                                                                                                           |     |    |
| Overvoltage category   |  | III                                                                                                                                                                                                                                      | III | II |
| Pollution degree       |  | 3                                                                                                                                                                                                                                        | 2   | 2  |
| Nominal voltage        |  | 400 V                                                                                                                                                                                                                                    | -   | -  |
| Rated surge voltage    |  | 6 kV                                                                                                                                                                                                                                     | -   | -  |
| Rated current          |  | 20 A                                                                                                                                                                                                                                     | -   | -  |
| Ratings per UL 1977    |  |                                                                                                                                                                                                                                          |     |    |
| Note for the US market |  | Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office. |     |    |

### General information

|                            |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |
|----------------------------|------------------------------------------------------------------------------------------|

### Connection data

|                            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 5                         | <b>Connection 1</b>             |                    |
| PE function                | Preceding PE contact      | Strip length                    | 9 mm / 0.35 inches |
| Conductor preparation      | ultrasonically tip-bonded | Pole number                     | 5                  |
|                            |                           | Sheathed cable diameter         | 11.2 ... 13.9 mm   |
|                            |                           | Wire cross-section              | 2.5 mm²            |
|                            |                           | Strip length (outer insulation) | 55 mm              |
|                            |                           | Connection type                 | Socket - free end  |

### Physical data

|              |                         |
|--------------|-------------------------|
| Pin spacing  | 10 mm / 0.394 inches    |
| Width        | 47 mm / 1.85 inches     |
| Height       | 15.38 mm / 0.606 inches |
| Total length | 6 m                     |

### Mechanical data

|                                         |                                                                                                               |
|-----------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Application                             | General mains applications                                                                                    |
| Coding                                  | A                                                                                                             |
| Variable coding                         | Yes                                                                                                           |
| Marking                                 | N L1 L2 L3                                                                                                    |
| Potential marking                       | N L1 L2 L3                                                                                                    |
| Mating force of a plug-in connection    | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 | 200, without resistive load                                                                                   |
| Connection type                         | Socket - free end                                                                                             |
| Type of pre-assembled cable             | Connecting cable                                                                                              |
| Cable type                              | H05Z1Z1-F 5G2.5                                                                                               |
| Protection type                         | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

### Plug-in connection

|                               |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All <i>WINSTA</i> ® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                        |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                    |                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)             | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Insulation material              | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94      | V0                                                                                                                     |
| Fire class per EN 50575          | C <sub>ca</sub>                                                                                                        |
| Contact material                 | Copper or copper alloy; surface-treated                                                                                |
| Contact plating                  | Tin                                                                                                                    |
| Fire load                        | 0.511 MJ                                                                                                               |
| Connector color                  | white                                                                                                                  |
| Strain relief color              | white                                                                                                                  |
| Printing color of strain relief  | black                                                                                                                  |
| Sheathed cable color             | white                                                                                                                  |
| Printing color of sheathed cable | black                                                                                                                  |
| Halogen-free                     | Yes                                                                                                                    |
| Silicon-free                     | Yes                                                                                                                    |
| Sheath material                  | Halogen-free                                                                                                           |
| Rubber cable                     | No                                                                                                                     |
| Weight                           | 1487.6 g                                                                                                               |
| Copper weight of the pipe        | 0.12 kg/m                                                                                                              |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| ETIM 8.0              | EC002587      |
| ETIM 7.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143863612 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Downloads

Environmental Product Compliance

| Compliance Search                                    |  |
|------------------------------------------------------|--|
| Environmental Product Compliance<br>771-9395/167-602 |  |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



**Item No.: 770-101**  
Locking lever; for flying leads; for manual operation; black



**Item No.: 770-121**  
Locking lever; for flying leads; for manual operation; white



**Item No.: 770-111**  
Locking lever; for flying leads; for tool operation; black



**Item No.: 770-131**  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



**Item No.: 770-201**  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



**Item No.: 770-221**  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



**Item No.: 897-2005**  
Protective cap; Type4; for sockets and plugs; PVC; red

1.2.2 Installation

1.2.2.1 Mounting accessories



**Item No.: 770-310**  
Mounting carrier; 2- to 5-pole; for flying leads; black

1.2.3 Marking

1.2.3.1 Marker



**Item No.: 770-450/000-006**  
Marker card; Plastic; blue



**Item No.: 770-450/000-001**  
Marker card; Plastic; green



**Item No.: 770-450/000-012**  
Marker card; Plastic; orange



**Item No.: 770-450/000-005**  
Marker card; Plastic; red



**Item No.: 770-450**  
Marker card; Plastic; white



**Item No.: 770-450/000-002**  
Marker card; Plastic; yellow

1.2.3.2 Marking strip



**Item No.: 210-334**  
Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white