




Color: white

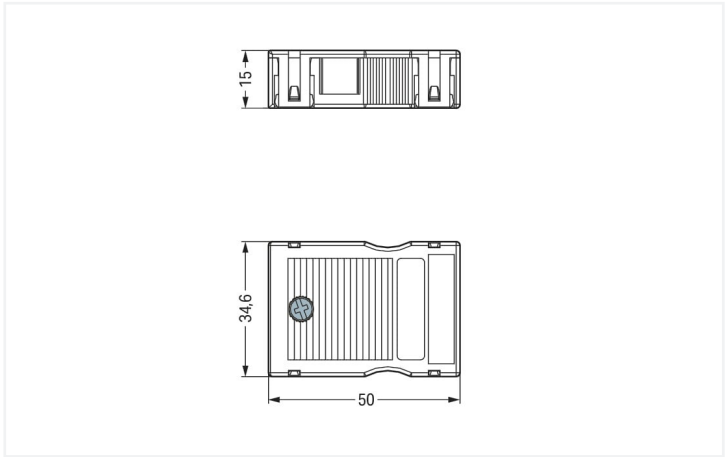

Dimensions in mm

Strain relief housing *WINSTA®* MIDI 3-pole

The strain relief housing from the *WINSTA®* MIDI product line guarantees you the greatest possible flexibility in electrical installation. With WAGO, you benefit from a large selection of expansions for the *WINSTA®* product line. The *WINSTA®* MIDI Pluggable Connection System with Push-in *CAGE CLAMP®* spring pressure connection technology facilitates exemplary electrification. Due to the included test slot, it is possible to check connections even when they are plugged in. This saves time, labor, and money. The strip length is 55 mm.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA®* MIDI

WINSTA® is the pluggable connection system that is optimally tailored to the strict requirements of electrical installation. It allows error-free installation of cables and components, quickly and reliably. Now you can also reduce installation costs without compromising quality and safety: with protection against mismatching eliminates the need for servicing and prevents unnecessary downtime.

- simple circuits
- quick replacement of defective units during ongoing operation

Connection data	
Connection 1	
Pole number	3
Connectable sheathed cable diameter	4.5 ... 8 mm
Strip length (outer insulation)	55 mm

Physical data	
Width	34.6 mm / 1.362 inches
Height	15.2 mm / 0.598 inches
Depth	50 mm / 1.969 inches



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	I
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.272 MJ
Weight	10.3 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918057523
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
					
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance

770-513/023-000

↓

Documentation

Bid Text

770-513/023-000

19.02.2019

xml
2.74 KB

↓

770-513/023-000

12.03.2015

doc
23.50 KB

↓

CAD/CAE-Data

CAD data

2D/3D Models
770-513/023-000

↓

CAE data

EPLAN Data Portal
770-513/023-000

↓

WSCAD Universe
770-513/023-000

↓

ZUKEN Portal
770-513/023-000

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

1.1.2 Shield termination

1.1.2.1 Shield termination



Item No.: 770-523
Shield connecting plate; 3-pole; for sockets and plugs; silver-colored

Subject to changes. Please also observe the further product documentation!

Current addresses can be found at: www.wago.com