




Color:   white

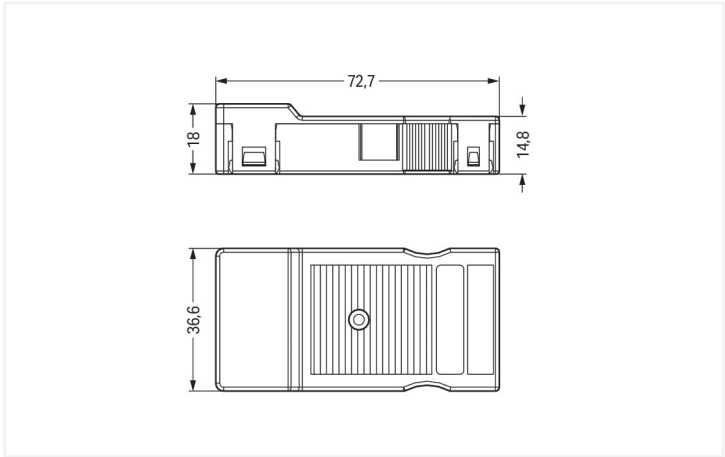

Dimensions in mm

Strain relief housing *WINSTA®* MIDI 3-pole

Choose proven sustainability for the electrical installation at your construction site: The strain relief housing from the *WINSTA®* MIDI product line. A comprehensive range of accessories rounds out the *WINSTA®* product line from WAGO. *WINSTA®* MIDI with Push-in *CAGE CLAMP®* spring pressure connection technology is used in can be found in a variety of projects you can use for quick, easy, secure, tailored electrical installation. The strip length is 71 mm.

*WINSTA®* MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The *WINSTA®* Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- pre-assembled versions
- fast, secure installation

| Connection data                     |             |
|-------------------------------------|-------------|
| Connection 1                        |             |
| Pole number                         | 3           |
| Connectable sheathed cable diameter | 9 ... 13 mm |
| Strip length (outer insulation)     | 71 mm       |

| Physical data |                        |
|---------------|------------------------|
| Width         | 34.6 mm / 1.362 inches |
| Height        | 15 mm / 0.591 inches   |
| Depth         | 50 mm / 1.969 inches   |



| Material data               |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | white                                                                                                                  |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Fire load                   | 0.512 MJ                                                                                                               |
| Weight                      | 15.5 g                                                                                                                 |

| Environmental requirements               |                                            |
|------------------------------------------|--------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                              |
| Continuous operating temperature         | -35 ... +85 °C                             |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-92   |
| eCl@ss 9.0            | 27-44-06-92   |
| ETIM 8.0              | EC002863      |
| ETIM 7.0              | EC002863      |
| PU (SPU)              | 25 pcs        |
| Packaging type        | Box           |
| Country of origin     | DE            |
| GTIN                  | 4045454026226 |
| Customs tariff number | 39269097900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

| Approvals / Certificates                                                           |          |                  |                                                                                     |           |                  |
|------------------------------------------------------------------------------------|----------|------------------|-------------------------------------------------------------------------------------|-----------|------------------|
| General approvals                                                                  |          |                  | Approvals for marine applications                                                   |           |                  |
|  |          |                  |  |           |                  |
| Approval                                                                           | Standard | Certificate Name | Approval                                                                            | Standard  | Certificate Name |
| cURus<br>Underwriters Laboratories Inc.                                            | UL 1977  | E45171           | LR<br>Lloyds Register                                                               | IEC 61984 | LR22429487TA     |



|                                  |  |  |   |
|----------------------------------|--|--|---|
| Downloads                        |  |  |   |
| Environmental Product Compliance |  |  |   |
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 770-513/021-000                  |  |  |   |

|                 |            |                 |   |
|-----------------|------------|-----------------|---|
| Documentation   |            |                 |   |
| Bid Text        |            |                 |   |
| 770-513/021-000 | 19.02.2019 | xml<br>2.84 KB  | ↓ |
| 770-513/021-000 | 04.12.2014 | doc<br>24.00 KB | ↓ |

|                 |   |                   |   |
|-----------------|---|-------------------|---|
| CAD/CAE-Data    |   |                   |   |
| CAD data        |   | CAE data          |   |
| 2D/3D Models    |   | EPLAN Data Portal | ↓ |
| 770-513/021-000 | ↓ | 770-513/021-000   |   |
|                 |   | WSCAD Universe    | ↓ |
|                 |   | 770-513/021-000   |   |
|                 |   | ZUKEN Portal      | ↓ |
|                 |   | 770-513/021-000   |   |

|                          |
|--------------------------|
| 1 Compatible Products    |
| 1.1 Optional Accessories |
| 1.1.1 Marking            |
| 1.1.1.1 Marking strip    |



Item No.: 210-333  
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white