




Color: ■ black

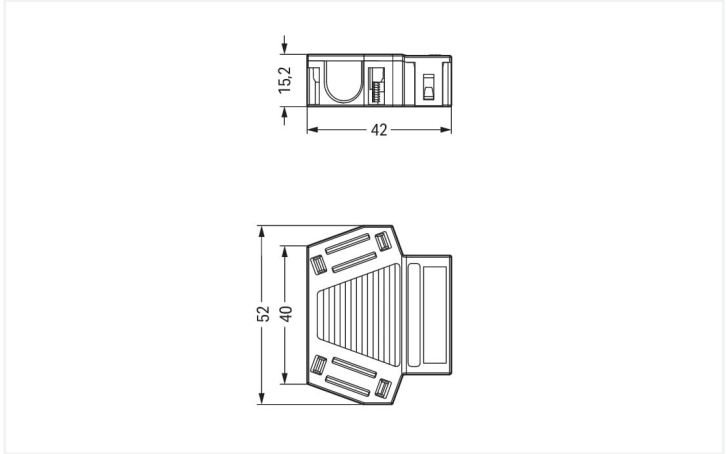

Dimensions in mm

Strain relief housing WINSTA® MIDI 3-pole

With the strain relief housing from the WINSTA® MIDI product line, zero-defect installation is ensured. You can rely on the quality of WINSTA® components from WAGO for your electrical installation accessories too. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy, flexible, and secure installation. A range up to 55 mm can be used for the strip length.

WINSTA® MIDI solutions for your electrical installation – protected against mismatching and maintenance-free

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Enjoy the benefits of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismatching from WAGO.

- for automation controllers
- quick replacement of defective units during ongoing operation

Connection data	
Connection 1	
Pole number	3
Connectable sheathed cable diameter	8 ... 11.5 mm
Strip length (outer insulation)	55 mm

Material data	
Note (material data)	Information on material specifications can be found here
Color	black
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.398 MJ
Weight	12 g



Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4044918102421
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

General approvals			Approvals for marine applications		
			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Ger- manischer Lloyd	-	TAE00001Z6
			LR Lloyds Register	IEC 61984	LR22429487TA

Downloads

Environmental Product Compliance	
Compliance Search	
Environmental Product Compliance 770-503/032-000	



Documentation

Bid Text			
770-503/032-000	19.02.2019	xml 2.78 KB	↓
770-503/032-000	04.12.2014	doc 23.50 KB	↓

CAD/CAE-Data

CAD data
2D/3D Models 770-503/032-000



CAE data
WSCAD Universe 770-503/032-000
ZUKEN Portal 770-503/032-000



1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white