


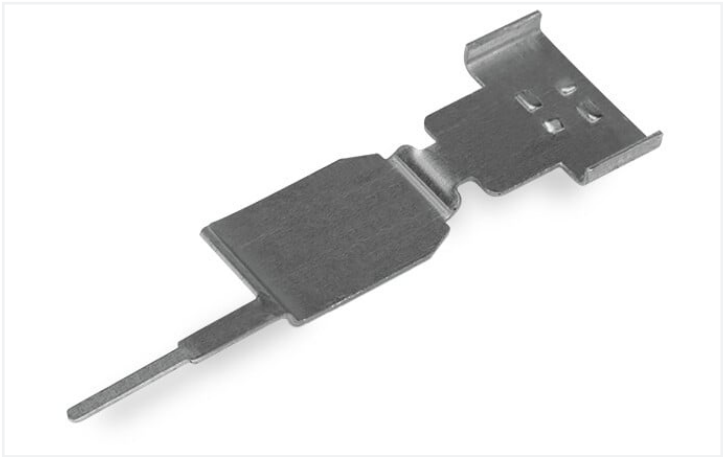

Shield termination WINSTA® MINI 5-pole

The shield termination from the WINSTA® MINI product line is the best solution for reliable installation. With WAGO, you benefit from a large selection of accessories for the WINSTA® product line. If only limited space is available, our smallest pluggable connection system, WINSTA® MINI, consistently displays its advantages. It is very compact, and, with Push-in CAGE CLAMP® spring pressure connection technology, it additionally saves time, since the connection is low-maintenance and can be performed without screw connections.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This significantly reduces the need for servicing and lowers costs. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with WINSTA® MINI accessories with protection against mismatching from WAGO.

- easy tool-free operation, a wide range of coding options
- rapid, structured electrical installation

Connection data

Connection 1	
Pole number	5

Mechanical data

Suitable	for socket
----------	------------

Material data

Note (material data)	Information on material specifications can be found here
Fire load	0 MJ
Weight	1.8 g
Material	Copper (SE Cu); special tin coating



Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	50 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4055143672757
Customs tariff number	85366990990

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 890-526

↓

Documentation			
Bid Text			
890-526	19.02.2019	xml 2.52 KB	↓
890-526	21.03.2018	doc 22.50 KB	↓