




Color: ■ gray

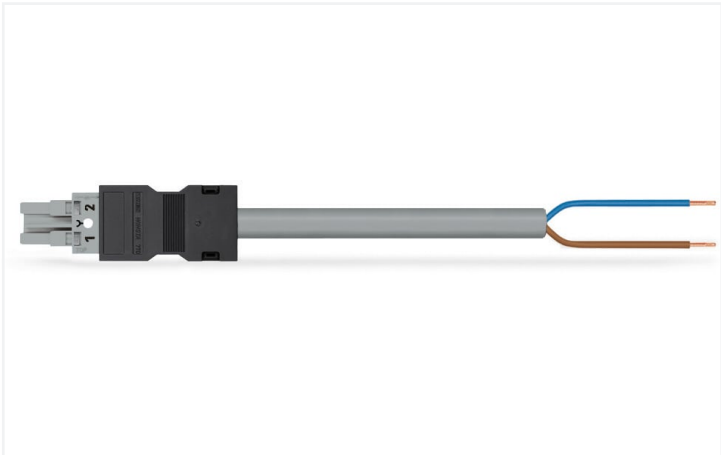

Dimensions in mm

Cable assembly WINSTA® MIDI with protection type IP20

For power and signal transmission: The WINSTA® MIDI cable assembly B coding. Our pluggable installation connectors with spring pressure connection technology function without screw connections. They allow flexible, error-free installation in numerous possible uses. For greater protection in electrical installations, the pluggable installation connector is equipped with mechanical protection against mismating. The pluggable installation connector offers touch-proof protection with live components in accordance with protection type IP20 (When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!)). Solutions like the WINSTA® MIDI pluggable installation connectors with B coding are appropriate for applications related to process control, such as for lighting or within data networks. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates exemplary electrification. Due to the built-in test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and expense. This product meets all the mandatory safety requirements of fire class E; as a result it can be used in domains where fire safety is relevant.

Fast, secure pluggable connections – cable assemblies from WAGO

The cable is pre-assembled with a socket and a free end. The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Choose durability and quality – with strain relief hosting from WAGO makes the electrical installation of electrical components visibly easier.

- pluggable installation connectors with protection against mismating
- for automation controllers
- for automation controllers
- custom-engineered solutions
- convenient installation and commissioning

| Notes     |                                                                                                                                                                                     |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Note      | Cables with a different fire class can be found in the eShop.                                                                                                                       |
| Variants: | Other pole markings<br>Other versions (or variants) can be requested from WAGO Sales or configured at <a href="https://configurator.wago.com/">https://configurator.wago.com/</a> . |

| Electrical data        |  |                                                                                                                                                                                                                                          |     |    |
|------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|----|
| Ratings per            |  | IEC/EN 60664-1                                                                                                                                                                                                                           |     |    |
| Overvoltage category   |  | III                                                                                                                                                                                                                                      | III | II |
| Pollution degree       |  | 3                                                                                                                                                                                                                                        | 2   | 2  |
| Nominal voltage        |  | 250 V                                                                                                                                                                                                                                    | -   | -  |
| Rated surge voltage    |  | 4 kV                                                                                                                                                                                                                                     | -   | -  |
| Rated current          |  | 16 A                                                                                                                                                                                                                                     | -   | -  |
| Ratings per UL 1977    |  |                                                                                                                                                                                                                                          |     |    |
| Note for the US market |  | Some versions may also be used for current interruption in accordance with the UL certificate in select applications with currents below 16 A and voltages up to 600 V. For further information, please contact your local sales office. |     |    |



| General information        |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Note on contact resistance | approx. 1 mΩ of contact resistance<br>approx. 0.25 mΩ contact transition plug/<br>socket |

| Connection data            |                           |                                 |                    |
|----------------------------|---------------------------|---------------------------------|--------------------|
| Total number of potentials | 2                         | <b>Connection 1</b>             |                    |
| Conductor preparation      | ultrasonically tip-bonded | Strip length                    | 9 mm / 0.35 inches |
|                            |                           | Pole number                     | 2                  |
|                            |                           | Sheathed cable diameter         | 6.8 ... 8.6 mm     |
|                            |                           | Wire cross-section              | 1.5 mm²            |
|                            |                           | Strip length (outer insulation) | 35 mm              |
|                            |                           | Connection type                 | Socket - free end  |

| Physical data |  |                        |
|---------------|--|------------------------|
| Pin spacing   |  | 10 mm / 0.394 inches   |
| Width         |  | 24.6 mm / 0.969 inches |
| Total length  |  | 5 m                    |

| Mechanical data                         |  |                                                                                                               |
|-----------------------------------------|--|---------------------------------------------------------------------------------------------------------------|
| Application                             |  | Control technology                                                                                            |
| Coding                                  |  | B                                                                                                             |
| Variable coding                         |  | No                                                                                                            |
| Marking                                 |  | 1 2                                                                                                           |
| Potential marking                       |  | 1 2                                                                                                           |
| Mating force of a plug-in connection    |  | approx. 20 ... 70 N (depending on pole number)                                                                |
| Retention force of a plug-in connection |  | when locked: > 80N                                                                                            |
| Unmating force of a plug-in connection  |  | when unlocked: approx. 20 ... 70 N (depending on pole number)                                                 |
| Number of mating cycles                 |  | 200, without resistive load                                                                                   |
| Connection type                         |  | Socket - free end                                                                                             |
| Type of pre-assembled cable             |  | Connecting cable                                                                                              |
| Cable type                              |  | Control line 2 x 1.5                                                                                          |
| Protection type                         |  | IP20; When mated: IP2xC (These compact connectors are not designed for use in open, easily accessible areas!) |

| Plug-in connection            |                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mismating protection          | Yes                                                                                                                                                                                                                                                                                                              |
| Note on mismating protection  | All WINSTA® components are 100% protected against mismating when:<br>a.) plugging different numbers of poles<br>b.) plugging while rotated 180<br>c.) plugging while laterally staggered<br>d.) plugging one pole                                                                                                |
| Locking lever                 | Can be retrofitted                                                                                                                                                                                                                                                                                               |
| Locking of plug-in connection | Locking lever                                                                                                                                                                                                                                                                                                    |
| Note on locking system        | All connectors for mounted installations (snap-in versions for lighting fixtures or devices, all types of PCB and distribution connectors) are factory-equipped with locking levers to ensure plugs and sockets are securely locked. Additional locking levers are only required for flying leads (plug/socket). |



| Material data                    |                                                                                                                        |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)             | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                            | gray                                                                                                                   |
| Insulation material              | Polyamide (PA66)                                                                                                       |
| Fire class per EN 50575          | E <sub>ca</sub>                                                                                                        |
| Contact material                 | Copper or copper alloy; surface-treated                                                                                |
| Contact plating                  | Tin                                                                                                                    |
| Fire load                        | 0.394 MJ                                                                                                               |
| Connector color                  | gray                                                                                                                   |
| Strain relief color              | black                                                                                                                  |
| Sheathed cable color             | gray                                                                                                                   |
| Printing color of sheathed cable | black                                                                                                                  |
| Halogen-free                     | No                                                                                                                     |
| Silicon-free                     | Yes                                                                                                                    |
| Sheath material                  | PVC                                                                                                                    |
| Rubber cable                     | No                                                                                                                     |
| Weight                           | 336.7 g                                                                                                                |
| Copper weight of the pipe        | 0.029 kg/m                                                                                                             |

| Environmental requirements               |                                                                                                       |
|------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                                                                                         |
| Continuous operating temperature         | -35 ... +85 °C                                                                                        |
| Note on continuous operating temperature | Cable for temperatures ≤ 70 °C (including halogen-free)<br>Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| eCl@ss 10.0           | 27-44-06-04   |
| eCl@ss 9.0            | 27-44-06-04   |
| ETIM 8.0              | EC002587      |
| ETIM 7.0              | EC002587      |
| PU (SPU)              | 1 pcs         |
| Packaging type        | unpacked      |
| Country of origin     | DE            |
| GTIN                  | 4055143487047 |
| Customs tariff number | 85444290900   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

General approvals



| Approval                              | Standard | Certificate Name |
|---------------------------------------|----------|------------------|
| CCA<br>DEKRA Certification B.V.       | EN 61535 | NTR NL-7355      |
| KEMA/KEUR<br>DEKRA Certification B.V. | EN 61535 | 71-123834        |



Downloads

Environmental Product Compliance

|                                  |  |  |   |
|----------------------------------|--|--|---|
| Compliance Search                |  |  |   |
| Environmental Product Compliance |  |  | ↓ |
| 771-8992/106-503                 |  |  |   |

Documentation

|                  |            |                 |   |
|------------------|------------|-----------------|---|
| Bid Text         |            |                 |   |
| 771-8992/106-503 | 19.02.2019 | xml<br>3.00 KB  | ↓ |
| 771-8992/106-503 | 02.06.2015 | doc<br>26.00 KB | ↓ |

CAD/CAE-Data

|                   |   |
|-------------------|---|
| CAE data          |   |
| EPLAN Data Portal | ↓ |
| 771-8992/106-503  |   |

1 Compatible Products

1.1 Required Accessories

1.1.1 Locking system

1.1.1.1 Locking system



Item No.: 770-101  
Locking lever; for flying leads; for manual operation; black



Item No.: 770-121  
Locking lever; for flying leads; for manual operation; white



Item No.: 770-111  
Locking lever; for flying leads; for tool operation; black



Item No.: 770-131  
Locking lever; for flying leads; for tool operation; white

1.2 Optional Accessories

1.2.1 Cover

1.2.1.1 Cover



Item No.: 770-201  
Lockout cap; 12-pole, separable; for sockets; Plastic; black



Item No.: 770-221  
Lockout cap; 12-pole, separable; for sockets; Plastic; white



Item No.: 897-2003  
Protective cap; Type2; for sockets and plugs; PVC; red

## 1.2.2 Installation

### 1.2.2.1 Mounting accessories



**Item No.: 770-310**

Mounting carrier; 2- to 5-pole; for flying leads; black

## 1.2.3 Marking

### 1.2.3.1 Marking strip



**Item No.: 210-334**

Marking strips; as a DIN A4 sheet; Strip width 5 mm; Strip length 182 mm; plain; Self-adhesive; white