


Data Sheet | Item Number: 294-4075

Lighting connector; push-button, external; without ground contact; 5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4075>



Color: white

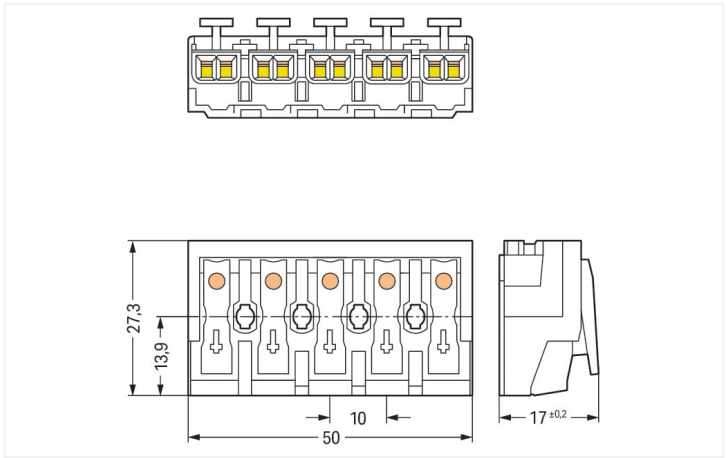

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data									
Ratings per		IEC/EN 60998-1			Ratings per		IEC/EN 60998-2-2		
Overvoltage category		III	III	II	Overvoltage category		III	III	II
Pollution degree		3	2	2	Pollution degree		3	2	2
Nominal voltage		-	-	500 V	Nominal voltage		-	-	500 V
Rated surge voltage		-	-	4 kV	Rated surge voltage		-	-	4 kV
Rated current		-	-	24 A	Rated current		-	-	24 A

Connection data			
Connection points	25	Connection 1	
Total number of potentials	5		
Number of connection types	4		
PE function	without PE contact		
		Connection type 1	External 1
		Connection technology	Push-in CAGE CLAMP®
		Number of connection points	2
		Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Pole number	5
		Wiring direction	Side-entry wiring



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3	
Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		50 mm / 1.969 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data		
Marking		DA- N L DA+
Mounting type		without snap-in mounting feet

Material data		
Note (material data)		Information on material specifications can be found here
Color		white
Material group		IIIa
Insulation material		Polycarbonate (PC)
Flammability class per UL94		V0
Clamping spring material		Chrome-nickel spring steel (CrNi)
Contact material		Electrolytic copper (E _{Cu})
Contact plating		Tin
Fire load		0.301 MJ
Halogen-free		Yes
Weight		15.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85
Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821097839
Customs tariff number	85369010000
Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	f686d79d-257e-4129-9e5e-256be8e22e31
SCIP notification number (Belgium)	1357b728-638a-4f77-852a-5698196fcaae
SCIP notification number (Bulgaria)	35a1d2bd-2495-4d3c-a918-18377907607a
SCIP notification number (Czech Republic)	1840dcd5-2936-4b7c-af49-f5a4ec5e89df
SCIP notification number (Denmark)	4494c0c4-eeb3-493d-a329-8b4d16cd5306
SCIP notification number (Finland)	be95ac01-daf8-4157-95f6-0463cabf2692
SCIP notification number (France)	caa05815-53bd-4248-9e7e-a7075c2fd4f5
SCIP notification number (Germany)	ccc1bfba-40aa-449c-8734-e4becca09cb0
SCIP notification number (Hungary)	6298bbd2-f845-48e4-9931-0cdfcad2d156
SCIP notification number (Italy)	fa85c1d4-d702-4e33-90c1-48b2ca381b59
SCIP notification number (Netherlands)	c5228bb8-0761-4623-9bb0-1dcf54039268
SCIP notification number (Poland)	9ac8dd46-74bf-4aa8-8ebb-711bd00bdaa3
SCIP notification number (Romania)	31edd227-93ca-4891-bfa7-915121d12004
SCIP notification number (Sweden)	4d63a88f-241c-4a3a-8a6e-f90154bc6174



Approvals / Certificates

General approvals

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-4075

↓

Documentation			
Additional Information		Bid Text	
Technical Section	pdf 2240.62 KB	294-4075	13.06.2017
	↓	294-4075	19.02.2019
		doc 28.50 KB	↓
		xml 5.58 KB	↓

CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 294-4075	WSCAD Universe 294-4075
↓	↓
	ZUKEN Portal 294-4075
	↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



Item No.: 294-370 Strain relief; for 294 Series; with snap-in mounting feet; white	Item No.: 294-375 Strain relief; for 294 Series; without snap- in mounting feet; white
---	---

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool


1.1.2.2 Operating tool




Item No.: 206-294
Disconnection tool; green

Installation Notes


Installation



5-pole – without ground contact




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination



EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

