




Color:  white

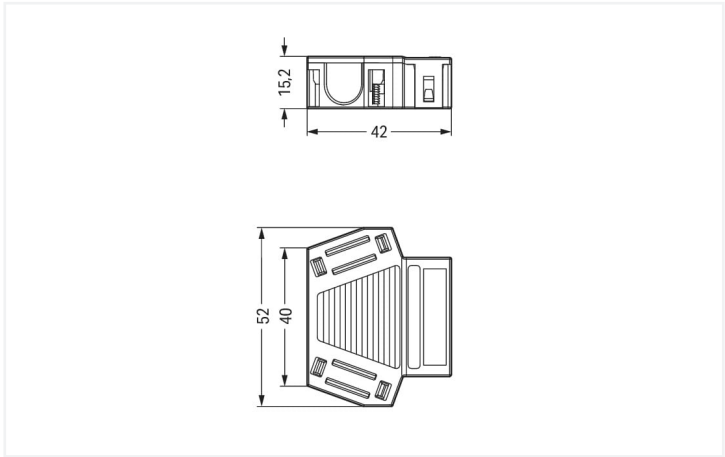

Dimensions in mm

Strain relief housing *WINSTA®* MIDI 3-pole

The strain relief housing from the *WINSTA®* MIDI product line is the advanced solution for reliable installation. With WAGO, you benefit from a large selection of expansions for the *WINSTA®* product line. The *WINSTA®* MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the built-in test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and costs. The strip length is 55 mm.

Lower costs through fast commissioning and elimination of service expenses – solutions from *WINSTA®* MIDI

The *WINSTA®* Pluggable Connection System is ideally tailored to the very strict requirements of building installation. It makes electrical installation pluggable, and consequently more efficient, more reliable, and error-free. Using this pre-assembled system decreases time spent on assembly and errors during installation at the construction site. Choose quality and durability – with protection against mismating from WAGO makes the electrical installation of electrical components noticeably easier.

- simple circuits
- convenient installation and commissioning

Connection data

| Connection 1                        |               |
|-------------------------------------|---------------|
| Pole number                         | 3             |
| Connectable sheathed cable diameter | 8 ... 11.5 mm |
| Strip length (outer insulation)     | 55 mm         |

Material data

|                             |  |                                                                                                                        |
|-----------------------------|--|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        |  | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       |  | white                                                                                                                  |
| Insulation material         |  | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 |  | V0                                                                                                                     |
| Fire load                   |  | 0.32 MJ                                                                                                                |
| Weight                      |  | 11 g                                                                                                                   |



| Environmental requirements               |                                            |
|------------------------------------------|--------------------------------------------|
| Processing temperature                   | -5 ... +40 °C                              |
| Continuous operating temperature         | -35 ... +85 °C                             |
| Note on continuous operating temperature | Insulating parts for temperatures ≤ 105 °C |

| Commercial data       |               |
|-----------------------|---------------|
| Product Group         | 20 (Winsta)   |
| eCl@ss 10.0           | 27-44-06-92   |
| eCl@ss 9.0            | 27-44-06-92   |
| ETIM 8.0              | EC002863      |
| ETIM 7.0              | EC002863      |
| PU (SPU)              | 25 pcs        |
| Packaging type        | Box           |
| Country of origin     | DE            |
| GTIN                  | 4044918102438 |
| Customs tariff number | 85369010000   |

| Environmental Product Compliance |                         |
|----------------------------------|-------------------------|
| RoHS Compliance Status           | Compliant, No Exemption |

Approvals / Certificates

| General approvals                                                                  |          |                  | Approvals for marine applications                                                                                                                                        |           |                  |
|------------------------------------------------------------------------------------|----------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------------|
|  |          |                  |   |           |                  |
| Approval                                                                           | Standard | Certificate Name | Approval                                                                                                                                                                 | Standard  | Certificate Name |
| cURus<br>Underwriters Laboratories<br>Inc.                                         | UL 1977  | E45171           | DNV GL<br>Det Norske Veritas, Ger-<br>manischer Lloyd                                                                                                                    | -         | TAE00001Z6       |
|                                                                                    |          |                  | LR<br>Lloyds Register                                                                                                                                                    | IEC 61984 | LR22429487TA     |

Downloads

| Environmental Product Compliance                       |                                                                                     |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|
| Compliance Search                                      |                                                                                     |
| Environmental Product<br>Compliance<br>770-513/032-000 |  |



Documentation

| Bid Text        |            |                 |                   |
|-----------------|------------|-----------------|-------------------|
| 770-513/032-000 | 19.02.2019 | xml<br>2.78 KB  | <a href="#">↓</a> |
| 770-513/032-000 | 04.12.2014 | doc<br>23.50 KB | <a href="#">↓</a> |

CAD/CAE-Data

| CAD data                        |                   |
|---------------------------------|-------------------|
| 2D/3D Models<br>770-513/032-000 | <a href="#">↓</a> |

| CAE data                          |                   |
|-----------------------------------|-------------------|
| WSCAD Universe<br>770-513/032-000 | <a href="#">↓</a> |
| ZUKEN Portal<br>770-513/032-000   | <a href="#">↓</a> |

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



**Item No.: 210-333**  
Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white