




Color: white

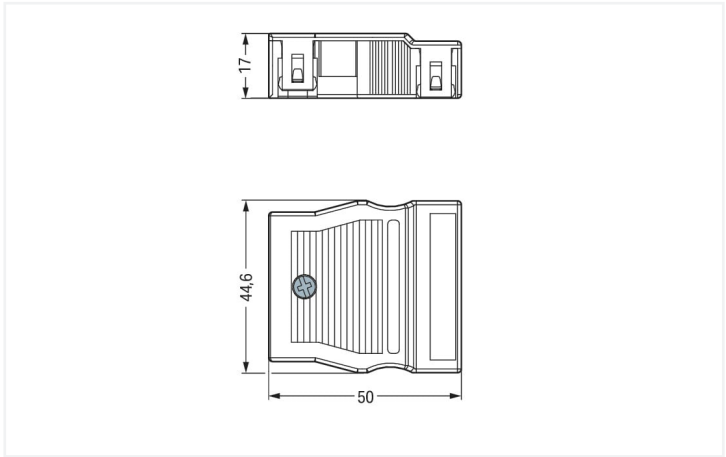

Dimensions in mm

Strain relief housing *WINSTA*® MIDI 4-pole

With the strain relief housing from the *WINSTA*® MIDI product line, error-free installation is ensured. You can rely on the level of quality of *WINSTA*® components from WAGO for your electrical installation accessories too. Our *WINSTA*® MIDI product line guarantees maximum flexibility for the installation of applications. With its Push-in CAGE CLAMP® spring pressure connection technology, it guarantees time-saving, error-free installation and offers flexibility for meeting various installation requirements. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

WINSTA® is the pluggable connection system that is perfectly tailored to the strict requirements of electrical installation. It ensures error-free installation of cables and components, quickly and reliably. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with *WINSTA*® MIDI accessories from WAGO.

- simple circuits
- rapid, structured electrical installation

Connection data	
Connection 1	
Pole number	4
Connectable sheathed cable diameter	9 ... 13 mm
Strip length (outer insulation)	55 mm

Physical data	
Width	44.6 mm / 1.756 inches
Height	17 mm / 0.669 inches
Depth	50 mm / 1.969 inches




Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.326 MJ
Weight	12.2 g

Environmental requirements	
Processing temperature	-5 ... +40 °C
Continuous operating temperature	-35 ... +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
Product Group	20 (Winsta)
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4017332755306
Customs tariff number	39269097900

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates					
General approvals			Approvals for marine applications		
			 		
Approval	Standard	Certificate Name	Approval	Standard	Certificate Name
cURus Underwriters Laboratories Inc.	UL 1977	E45171	DNV GL Det Norske Veritas, Germanischer Lloyd	-	TAE00001Z6
cURus Underwriters Laboratories Inc.	UL 1059	E 45172	LR Lloyds Register	IEC 61984	LR22429487TA



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 770-514

↓

Documentation

Bid Text

770-514	19.02.2019	xml 2.73 KB	↓
770-514	12.03.2015	doc 23.50 KB	↓

CAD/CAE-Data

CAD data

2D/3D Models 770-514

↓

CAE data

EPLAN Data Portal 770-514

↓

WSCAD Universe 770-514

↓

ZUKEN Portal 770-514

↓

1 Compatible Products

1.1 Optional Accessories

1.1.1 Marking

1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white