



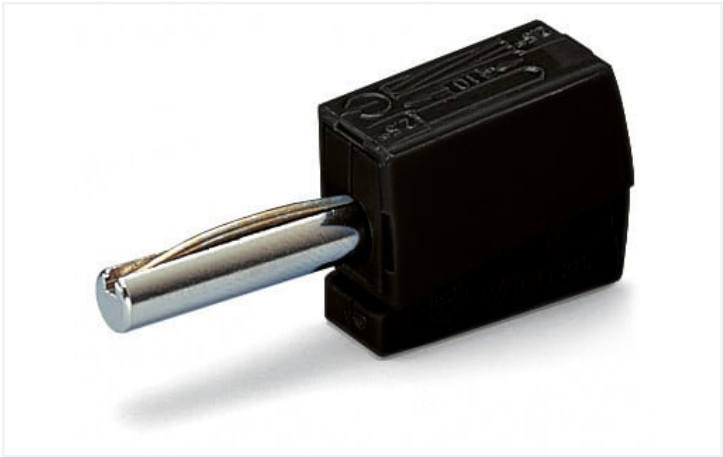

Color: ■ black

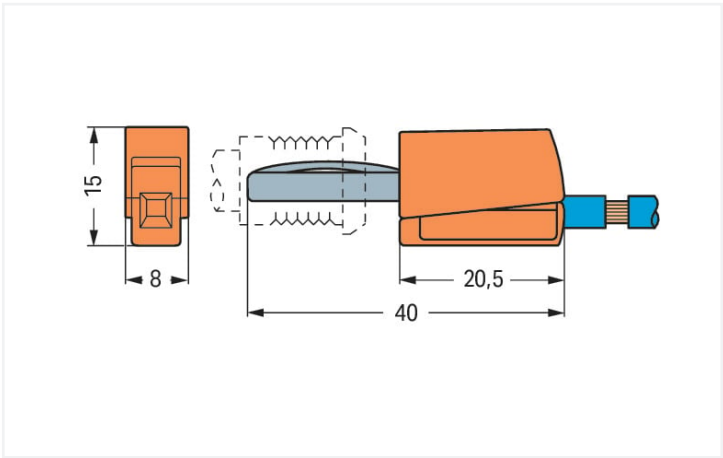

Dimensions in mm

Technical data	
Total number of potentials	1

Electrical data	
Rated current	20 A
Test voltage	42 V

Connection data	
Connection technology	CAGE CLAMP®
Strip length	9 ... 11 mm / 0.35 ... 0.43 inches
Connection points	1
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG



Physical data		
Width		8 mm / 0.315 inches
Height		15 mm / 0.591 inches
Depth		40 mm / 1.575 inches

Material data		
Color		black
Fire load		0.041 MJ
Weight		3.9 g

Commercial data		
Product Group		2 (Terminal Block Accessories)
eCl@ss 10.0		27-44-03-13
eCl@ss 9.0		27-44-03-13
ETIM 8.0		EC002255
ETIM 7.0		EC002255
PU (SPU)		50 pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454293499
Customs tariff number		85366990990

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads

Environmental Product Compliance



Compliance Search			
Environmental Product Compliance 215-311			

Documentation

Bid Text			
215-311	19.02.2019	xml 3.02 KB	
215-311	19.09.2017	doc 24.50 KB	

CAD/CAE-Data	
CAD data 2D/3D Models 215-311 ↓	CAE data EPLAN Data Portal 215-311 ↓
	WSCAD Universe 215-311 ↓


Installation Notes



Conductor termination: Press button fully, insert stripped conductor into square entry and release.

Strip conductor to 9 ... 11 mm (0.35 ... 0.43 inch).

Testing



Testing via banana plug.
Picture shows a test plug adapter (209-170).