



Data Sheet | Item Number: 294-5213

Lighting connector; push-button, external; with snap-in ground contact; N-PE-L; 3-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max. 2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-5213>

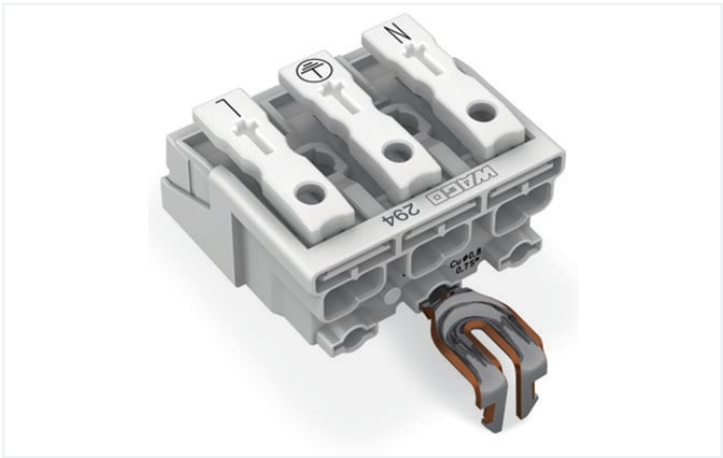

Color: white

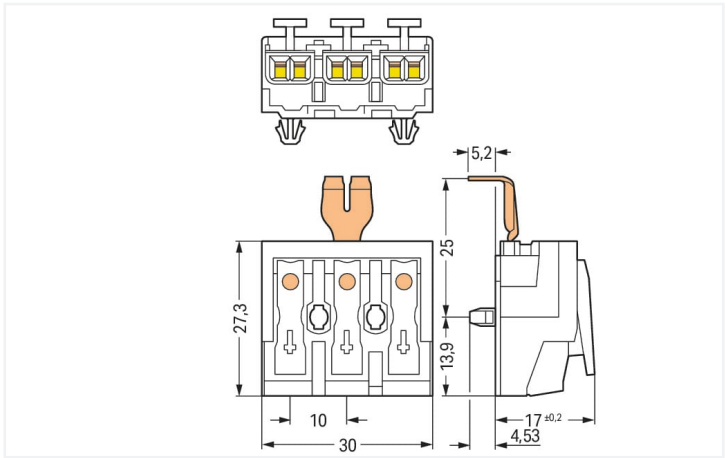

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data		Connection 1	
Connection points	15	Connection type 1	External 1
Total number of potentials	3	Connection technology	Push-in CAGE CLAMP®
Number of connection types	4	Number of connection points	2
PE function	Snap-in PE contact	Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Pole number	3
		Wiring direction	Side-entry wiring



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 3	
Connection type 3	Internal 3
Connection technology 3	PUSH WIRE®
Number of connection points 3	1
Actuation type 3	Push-in
Solid conductor 3	0.5 ... 1.5 mm² / 18 ... 16 AWG
Fine-stranded conductor; with insulated ferrule 3	0.5 ... 0.75 mm² / 18 AWG
Fine-stranded conductor; with uninsulated ferrule 3	0.5 ... 1 mm² / 18 AWG
Strip length 3	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		30 mm / 1.181 inches
Height		21.53 mm / 0.848 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	N- -L
Mounting type	Snap-in foot

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.183 MJ
Halogen-free	Yes
Weight	10.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	500 pcs
Packaging type	Bag
Country of origin	PL
GTIN	4050821020783
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	9b9b6b2c-b393-467d-a8f8-0d7e2e92d1c6
SCIP notification number (Belgium)	5bd92201-f2af-4f91-bad2-39b19414f890
SCIP notification number (Bulgaria)	0ecd8bd7-a565-4f32-89b5-c3b189940cde
SCIP notification number (Czech Republic)	2663d222-c4ff-4d87-814b-ff1c389dde4d
SCIP notification number (Denmark)	9a76f475-e585-4f69-9fd7-744f96d4420b
SCIP notification number (Finland)	14b2be46-d612-4ad6-b66a-c38b185ba3fd
SCIP notification number (France)	1278f4d6-d0f5-49d8-93ab-6b626b7a35e6
SCIP notification number (Germany)	73a399f1-6d05-4d04-bedc-0dd5e7c8aa3c
SCIP notification number (Hungary)	948a7d30-93cb-4f0c-8f06-39fb3b472766
SCIP notification number (Italy)	23241126-05b6-4d31-ae63-e07c73c91ae4
SCIP notification number (Netherlands)	00f5eaec-0b1b-4765-b0ce-3caa985ddeaa
SCIP notification number (Poland)	cde72528-23aa-4412-aa98-5f341a8b3382
SCIP notification number (Romania)	92de06df-6d8b-4da8-9ccb-87174db8216e
SCIP notification number (Sweden)	c7a70ef4-f137-47f7-b7a6-5f046e9d00bf



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 294-5213



Documentation

Additional Information
Technical Section

pdf
2240.62 KB



Bid Text			
294-5213	13.06.2017	doc 28.00 KB	
294-5213	19.02.2019	xml 5.58 KB	

CAD/CAE-Data

CAD data
2D/3D Models 294-5213



CAE data
WSCAD Universe 294-5213



ZUKEN Portal
294-5213



1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white



[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364
Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white

Item No.: 294-384
Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool




1.1.2.2 Operating tool



Item No.: 206-294
Disconnection tool; green

Installation Notes

Installation




3-pole – with snap-in ground contact, d = 4.9 mm

Snap-in foot


Drilled hole for snap-in mounting foot

Conductor termination




EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² "str, f-str"



Terminating five conductors per pole – solid and fine-stranded.

Internal connection:
PUSH WIRE® for internal wiring with solid conductors



External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types

