



**Data Sheet | Item Number: 2000-1304**  
3-conductor through terminal block; 1 mm²; for Ex e II and Ex i applications; side and center marking; for DIN-rail 35 x 15 and 35 x 7.5; Push-in CAGE CLAMP®; 1,00 mm²; blue

<https://www.wago.com/2000-1304>

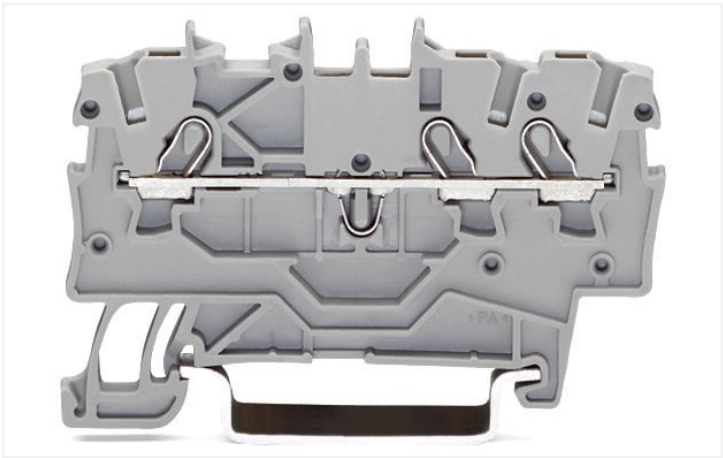

Color: ■ blue

Similar to illustration

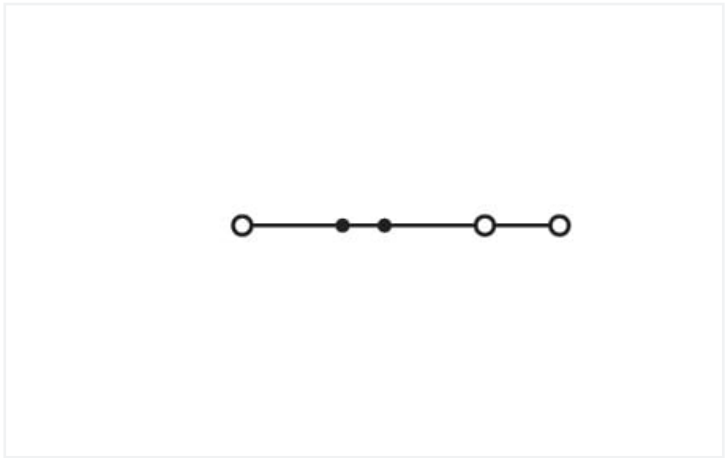

Similar to illustration

**Electrical data**

| Ratings per                                   | IEC/EN 60947-7-1 |     |    |
|-----------------------------------------------|------------------|-----|----|
| Overvoltage category                          | III              | III | II |
| Pollution degree                              | 3                | 2   | 2  |
| Nominal voltage                               | 800 V            | -   | -  |
| Rated surge voltage                           | 8 kV             | -   | -  |
| Rated current                                 | 13.5 A           | -   | -  |
| Current at conductor cross-section (max.) mm² | 17.5 A           | -   | -  |

| Approvals per | UL 1059 |       |   |
|---------------|---------|-------|---|
| Use group     | B       | C     | D |
| Rated voltage | 600 V   | 600 V | - |
| Rated current | 15 A    | 15 A  | - |

| Approvals per | CSA 22.2 No 158 |       |   |
|---------------|-----------------|-------|---|
| Use group     | B               | C     | D |
| Rated voltage | 600 V           | 600 V | - |
| Rated current | 10 A            | 10 A  | - |

| Ex information                      |                                                                                                                                                       |
|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference hazardous areas           | See application instructions in section "Knowledge and Downloads – Documentation – Additional Information: Technical Section; Technical Explanations" |
| Ratings per                         | ATEX: PTB 11 ATEX 1041 U / IECEx: PTB 11.0093U (Ex eb IIC Gb)                                                                                         |
| Rated voltage EN (Ex e II)          | 550 V                                                                                                                                                 |
| Rated current (Ex e II)             | 13 A                                                                                                                                                  |
| Rated current (Ex e II) with jumper | 12 A                                                                                                                                                  |

| Power Loss                                                   |           |
|--------------------------------------------------------------|-----------|
| Power loss, per pole (potential)                             | 0.4338 W  |
| Rated current I <sub>N</sub> for specified power loss        | 13.5 A    |
| Resistance value for specified, current-dependent power loss | 0.00238 Ω |

## Connection data

|                            |   |
|----------------------------|---|
| Connection points          | 3 |
| Total number of potentials | 1 |
| Number of levels           | 1 |
| Number of jumper slots     | 2 |

### Connection 1

|                                                            |                                                                                                                                   |
|------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|
| Connection technology                                      | Push-in CAGE CLAMP®                                                                                                               |
| Actuation type                                             | Operating tool                                                                                                                    |
| Connectable conductor materials                            | Copper                                                                                                                            |
| Nominal cross-section                                      | 1 mm²                                                                                                                             |
| Solid conductor                                            | 0.14 ... 1.5 mm² / 24 ... 16 AWG                                                                                                  |
| Solid conductor; push-in termination                       | 0.5 ... 1.5 mm² / 20 ... 16 AWG                                                                                                   |
| Fine-stranded conductor                                    | 0.14 ... 1.5 mm² / 24 ... 16 AWG                                                                                                  |
| Fine-stranded conductor; with insulated ferrule            | 0.14 ... 0.75 mm² / 24 ... 18 AWG                                                                                                 |
| Fine-stranded conductor; with ferrule; push-in termination | 0.5 ... 0.75 mm² / 20 ... 18 AWG                                                                                                  |
| Note (conductor cross-section)                             | Depending on the conductor characteristic, a conductor with a smaller cross-section can also be inserted via push-in termination. |
| Strip length                                               | 9 ... 11 mm / 0.35 ... 0.43 inches                                                                                                |
| Wiring direction                                           | Front-entry wiring                                                                                                                |

## Physical data

|                                   |                        |
|-----------------------------------|------------------------|
| Width                             | 3.5 mm / 0.138 inches  |
| Height                            | 58.2 mm / 2.291 inches |
| Depth from upper-edge of DIN-rail | 32.9 mm / 1.295 inches |

## Mechanical data

|               |                     |
|---------------|---------------------|
| Mounting type | DIN-35 rail         |
| Marking level | Center/side marking |

## Material data

|                             |                                                                                                                        |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Note (material data)        | <a href="https://www.wago.com/us/material-specifications">Information on material specifications can be found here</a> |
| Color                       | blue                                                                                                                   |
| Material group              | I                                                                                                                      |
| Insulation material         | Polyamide (PA66)                                                                                                       |
| Flammability class per UL94 | V0                                                                                                                     |
| Fire load                   | 0.092 MJ                                                                                                               |
| Weight                      | 4.3 g                                                                                                                  |

## Environmental requirements

|                                  |                 |
|----------------------------------|-----------------|
| Processing temperature           | -35 ... +85 °C  |
| Continuous operating temperature | -60 ... +105 °C |



| Commercial data       |               |  |
|-----------------------|---------------|--|
| Product Group         | 22 (TOPJOB S) |  |
| eCl@ss 10.0           | 27-14-11-20   |  |
| eCl@ss 9.0            | 27-14-11-20   |  |
| ETIM 8.0              | EC000897      |  |
| ETIM 7.0              | EC000897      |  |
| PU (SPU)              | 100 pcs       |  |
| Packaging type        | Box           |  |
| Country of origin     | CN            |  |
| GTIN                  | 4045454966874 |  |
| Customs tariff number | 85369010000   |  |

| Environmental Product Compliance |                         |  |
|----------------------------------|-------------------------|--|
| RoHS Compliance Status           | Compliant, No Exemption |  |

| Approvals / Certificates                                  |          |                                                            |
|-----------------------------------------------------------|----------|------------------------------------------------------------|
| General approvals                                         |          | Declarations of conformity and manufacturer's declarations |
|                                                           |          |                                                            |
| Approval                                                  | Standard | Certificate Name                                           |
| CCA<br>DEKRA Certification B.V.                           | EN 60947 | NTR NL 7962                                                |
| CSA<br>DEKRA Certification B.V.                           | C22.2    | 2130762                                                    |
| KEMA/KEUR<br>DEKRA Certification B.V.                     | EN 60947 | 71-125928                                                  |
| UL<br>Underwriters Laboratories Inc.                      | UL 1059  | E45172                                                     |
| Approval                                                  | Standard | Certificate Name                                           |
| ATEX-Attestation of Con-<br>formity<br>WAGO GmbH & Co. KG | -        | -                                                          |
| EU-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG   | -        | -                                                          |
| Railway<br>WAGO GmbH & Co. KG                             | -        | Railway Ready                                              |
| UK-Declaration of Confor-<br>mity<br>WAGO GmbH & Co. KG   | -        | -                                                          |

| Approvals for marine applications                     |                |                                                                      |
|-------------------------------------------------------|----------------|----------------------------------------------------------------------|
|                                                       |                |                                                                      |
| Approval                                              | Standard       | Certificate Name                                                     |
| ABS<br>American Bureau of Ship-<br>ping               | EN 60947       | 20-HG1941090-PDA                                                     |
| BV<br>Bureau Veritas S.A.                             | EN 60947       | 38586/B0 BV                                                          |
| DNV GL<br>Det Norske Veritas, Ger-<br>manischer Lloyd | -              | TAE00001V2                                                           |
| LR<br>Lloyds Register                                 | EN 60947       | 91/20112(E10)                                                        |
| Approvals for hazardous areas                         |                |                                                                      |
|                                                       |                |                                                                      |
| Approval                                              | Standard       | Certificate Name                                                     |
| AEx<br>Underwriters Laboratories<br>Inc.              | UL 60079       | E185892 (AEx eb IIC resp.<br>Ex eb IIC)                              |
| ATEX<br>Physikalisch Technische<br>Bundesanstalt      | EN 60079       | PTB 11 ATEX 1041 U (II 2<br>G Ex eb IIC Gb bzw. I M 2<br>Ex eb I Mb) |
| CCC<br>CNEX                                           | GB/T 3836.3    | 2020312313000182 (Ex<br>eb IIC Gb, Ex eb I Mb)                       |
| EAC<br>Brjansker Zertifizierungs-<br>stelle           | TP TC 012/2011 | RU C-DE.AM02.<br>B.00127/19 (Ex e IIC Gb U)                          |
| IECEx<br>Physikalisch Technische<br>Bundesanstalt     | IEC 60079      | IECEx PTB 11.0093U (Ex e<br>IIC Gb or Ex e I Mb)                     |



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 2000-1304

Download icon

Documentation

Additional Information

Technical Section

pdf

2240.62 KB

Download icon

Bid Text

2000-1304

19.02.2019

xml

3.95 KB

Download icon

2000-1304

07.08.2018

docx

14.62 KB

Download icon

CAD/CAE-Data

CAD data

2D/3D Models

2000-1304

Download icon

CAE data

EPLAN Data Portal

2000-1304

Download icon

WSCAD Universe

2000-1304

Download icon

ZUKEN Portal

2000-1304

Download icon

1 Compatible Products

1.1 Required Accessories

1.1.1 End plate

1.1.1.1 End plate

Item No.: 2000-1391

End and intermediate plate; 0.7 mm thick; gray

Item No.: 2000-1392

End and intermediate plate; 0.7 mm thick; orange

Item No.: 209-191

Separator for Ex e/Ex i applications; 3 mm thick; 120 mm wide; orange

1.2 Optional Accessories

1.2.1 DIN-rail

1.2.1.1 Mounting accessories

Item No.: 210-196

Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Item No.: 210-198

Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

Item No.: 210-197

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

Item No.: 210-114

Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

Item No.: 210-118

Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

Item No.: 210-115

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

Item No.: 210-112

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

Item No.: 210-113

Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored



1.2.2 Ferrule

1.2.2.1 Ferrule



**Item No.: 216-241**  
Ferrule; Sleeve for 0.5 mm<sup>2</sup> / 20 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; white



**Item No.: 216-242**  
Ferrule; Sleeve for 0.75 mm<sup>2</sup> / 18 AWG; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; gray



**Item No.: 216-243**  
Ferrule; Sleeve for 1 mm<sup>2</sup> / AWG 18; insulated; electro-tin plated; electrolytic copper; gastight crimped; acc. to DIN 46228, Part 4/09.90; red

1.2.3 Installation

1.2.3.1 Cover



**Item No.: 709-156**  
Cover; Type 3; suitable for cover carrier, type 3; 1 m long; transparent

1.2.3.2 Cover carrier



**Item No.: 709-169**  
Cover carrier; Type 3; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.2.4 Jumper

1.2.4.1 Jumper



**Item No.: 2000-406/020-000**  
Delta jumper; insulated; light gray



**Item No.: 2000-410/000-006**  
Jumper; 10-way; insulated; blue



**Item No.: 2000-410**  
Jumper; 10-way; insulated; light gray



**Item No.: 2000-410/000-005**  
Jumper; 10-way; insulated; red



**Item No.: 2000-402/000-006**  
Jumper; 2-way; insulated; blue



**Item No.: 2000-402**  
Jumper; 2-way; insulated; light gray



**Item No.: 2000-402/000-005**  
Jumper; 2-way; insulated; red



**Item No.: 2000-402/000-018**  
Jumper; 2-way; insulated; yellow-green



**Item No.: 2000-403/000-006**  
Jumper; 3-way; insulated; blue



**Item No.: 2000-403**  
Jumper; 3-way; insulated; light gray



**Item No.: 2000-403/000-005**  
Jumper; 3-way; insulated; red



**Item No.: 2000-404/000-006**  
Jumper; 4-way; insulated; blue



**Item No.: 2000-404**  
Jumper; 4-way; insulated; light gray



**Item No.: 2000-404/000-005**  
Jumper; 4-way; insulated; red



**Item No.: 2000-405/000-006**  
Jumper; 5-way; insulated; blue



**Item No.: 2000-405**  
Jumper; 5-way; insulated; light gray



**Item No.: 2000-405/000-005**  
Jumper; 5-way; insulated; red



**Item No.: 2000-406/000-006**  
Jumper; 6-way; insulated; blue



**Item No.: 2000-406**  
Jumper; 6-way; insulated; light gray



**Item No.: 2000-406/000-005**  
Jumper; 6-way; insulated; red



**Item No.: 2000-407/000-006**  
Jumper; 7-way; insulated; blue



**Item No.: 2000-407**  
Jumper; 7-way; insulated; light gray



**Item No.: 2000-407/000-005**  
Jumper; 7-way; insulated; red



**Item No.: 2000-408/000-006**  
Jumper; 8-way; insulated; blue



1.2.4.1 Jumper

|                                                                                                                                                               |                                                                                                                                                               |                                                                                                                                                                 |                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 2000-408</b><br>Jumper; 8-way; insulated; light gray        | <br><b>Item No.: 2000-408/000-005</b><br>Jumper; 8-way; insulated; red       | <br><b>Item No.: 2000-409/000-006</b><br>Jumper; 9-way; insulated; blue        | <br><b>Item No.: 2000-409</b><br>Jumper; 9-way; insulated; light gray                    |
| <br><b>Item No.: 2000-409/000-005</b><br>Jumper; 9-way; insulated; red       | <br><b>Item No.: 2000-440</b><br>Jumper; from 1 to 10; insulated; light gray | <br><b>Item No.: 2000-433/000-006</b><br>Jumper; from 1 to 3; insulated; blue | <br><b>Item No.: 2000-433</b><br>Jumper; from 1 to 3; insulated; light gray              |
| <br><b>Item No.: 2000-433/000-005</b><br>Jumper; from 1 to 3; insulated; red | <br><b>Item No.: 2000-434</b><br>Jumper; from 1 to 4; insulated; light gray  | <br><b>Item No.: 2000-435</b><br>Jumper; from 1 to 5; insulated; light gray   | <br><b>Item No.: 2000-436</b><br>Jumper; from 1 to 6; insulated; light gray              |
| <br><b>Item No.: 2000-437</b><br>Jumper; from 1 to 7; insulated; light gray  | <br><b>Item No.: 2000-438</b><br>Jumper; from 1 to 8; insulated; light gray  | <br><b>Item No.: 2000-439</b><br>Jumper; from 1 to 9; insulated; light gray   | <br><b>Item No.: 2000-405/011-000</b><br>Star point jumper; 3-way; insulated; light gray |
| <br><b>Item No.: 210-103</b><br>Wire commoning chain; insulated; black       | <br><b>Item No.: 210-123</b><br>Wire commoning chain; insulated; blue        |                                                                                                                                                                 |                                                                                                                                                                             |

1.2.5 Marking

1.2.5.1 Group marker carrier

|                                                                                                                                                |
|------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 2009-191</b><br>Group marker carrier; gray |
|------------------------------------------------------------------------------------------------------------------------------------------------|

1.2.5.2 Marker

|                                                                                                                                                                                                                  |                                                                                                                                                                                                             |                                                                                                                                                                                                           |                                                                                                                                                                                                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 793-3501</b><br>WMB marking card; as card; plain; snap-on type; white                                        | <br><b>Item No.: 2009-113/000-006</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; blue   | <br><b>Item No.: 2009-113/000-007</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; gray | <br><b>Item No.: 2009-113/000-023</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; green  |
| <br><b>Item No.: 2009-113/000-017</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; light green | <br><b>Item No.: 2009-113/000-012</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; orange | <br><b>Item No.: 2009-113/000-005</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; red  | <br><b>Item No.: 2009-113/000-024</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; violet |
| <br><b>Item No.: 2009-113</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; white               | <br><b>Item No.: 2009-113/000-002</b><br>WMB-Inline; for Smart Printer; 2300 pieces on roll; plain; snap-on type; yellow |                                                                                                                                                                                                           |                                                                                                                                                                                                               |

1.2.5.3 Marking strip

|                                                                                                                                                                                                             |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>Item No.: 2009-110</b><br>Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 1.2.6 Protective warning marker

### 1.2.6.1 Cover



**Item No.: 2000-115**

Protective warning marker; for 5 terminal blocks; with high-voltage symbol, black; yellow

## 1.2.7 Push-in type wire jumper

### 1.2.7.1 Jumper



**Item No.: 2009-404**

Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 110 mm long; gray



**Item No.: 2009-406**

Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 250 mm long; gray



**Item No.: 2009-402**

Push-in type wire jumper; 0.75 mm<sup>2</sup>; insulated; 60 mm long; gray

## 1.2.8 Screwless end stop

### 1.2.8.1 Mounting accessories



**Item No.: 249-117**

Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



**Item No.: 249-116**

Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

## 1.2.9 Test and measurement

### 1.2.9.1 Testing accessories



**Item No.: 2000-560**

Modular TOPJOB®S connector; modular; for jumper contact slot; 10-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-552**

Modular TOPJOB®S connector; modular; for jumper contact slot; 2-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-553**

Modular TOPJOB®S connector; modular; for jumper contact slot; 3-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-554**

Modular TOPJOB®S connector; modular; for jumper contact slot; 4-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-555**

Modular TOPJOB®S connector; modular; for jumper contact slot; 5-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-556**

Modular TOPJOB®S connector; modular; for jumper contact slot; 6-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-557**

Modular TOPJOB®S connector; modular; for jumper contact slot; 7-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-558**

Modular TOPJOB®S connector; modular; for jumper contact slot; 8-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-559**

Modular TOPJOB®S connector; modular; for jumper contact slot; 9-pole; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-549**

Spacer module; modular; e.g., for bridging commoned terminal blocks; gray



**Item No.: 2009-174**

Test plug adapter; for 4 mm Ø test plugs; for testing TOPJOB®S rail-mounted terminal blocks; gray



**Item No.: 210-136**

Test plug; 2 mm Ø; with 500 mm cable; red



**Item No.: 2009-182**

Testing tap; for max. 2.5 mm<sup>2</sup>; tool-free connection for individual test wires 0.08 - 2.5 mm; gray



**Item No.: 2000-510**

TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1,00 mm<sup>2</sup>; gray



**Item No.: 2000-511**

TOPJOB®S L-type test plug module; modular; for jumper contact slot; 1-pole; 1,00 mm<sup>2</sup>; gray



1.2.10 Tool

1.2.10.1 Operating tool



**Item No.: 210-719**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft



**Item No.: 210-648**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; angled; short




**Item No.: 210-647**  
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft; multicoloured

Installation Notes


Conductor termination




**All conductor types at a glance**



Push-in termination of solid and ferruled conductors




**Inserting a conductor via push-in termination:**  
Solid conductors with cross-sections from either one size above, or up to two sizes below, the rated cross-section can be simply pushed in – no tools needed.




**Inserting a conductor via operating tool:**  
Connecting fine-stranded conductors without ferrules, or small cross-sectional conductors that cannot be pushed in, is performed similarly to the original CAGE CLAMP® – just use an operating tool.  
**Advantage:**  
To open the clamp, the operating tool is inserted vertically. The conductor entry is less than 15 degrees for easier wiring.

Commoning




Insert push-in type jumper bar and push down until it hits backstop.




**Removing a push-in type jumper bar:**  
Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper. Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.


Commoning



This star point jumper has been specially developed to create a “star point” and is used on motor terminal boards equipped with Rail-Mount Terminal Blocks TOPJOB® S.



This delta jumper has been specially developed to create a delta configuration and is used on motor terminal boards equipped with rail-mount terminal blocks TOPJOB® S.




Push down the wire jumper (2009-402) until fully inserted. For rewiring, lift the jumper with an operating tool at the notch provided for this purpose on the jumper.




Testing



The modular TOPJOB® S connectors also connect conductors of the same size as the terminal blocks being used.



TOPJOB® S Connectors with a 2 mm Ø test socket for testing voltage via 2-pole voltage tester



Rail-mount terminal block assembly for electric motor wiring




Test plug adapter (2009-174, CAT I) for 4 mm Ø plugs – compatible with 2000 to 2016 Series




Testing tap (2009-182) for tool-free connection of test cables up to 2.5 mm² (12 AWG) – compatible with 2000 to 2016 Series

Marking




Snapping WMB Inline markers into marker slots.




TOPJOB® S 2009-193 Group Marker Carrier (equipped with a marking strip) for all 2001 to 2016 Series TOPJOB® S Rail-Mount Terminal Blocks  
Do not use on an end plate!




Ex application




Through terminal blocks with a blue insulated housing are suitable for Ex i applications.




All through and ground conductor terminal blocks are suitable for Ex e II applications.



Separator plate for Ex e/Ex i applications  
An end plate must be applied to the terminal block located directly behind an Ex e/Ex i separator plate.



**Ex e II/Ex i terminal strip**  
**Note:**  
The movable feet of terminal blocks and separator plates must face the same direction.



A separator plate is located between the Ex e II and Ex i terminal strip.  
End plate  
Ex e II terminal blocks  
Separator plate for Ex e/Ex i applications  
End plate  
Ex i terminal blocks  
According to EN 50020, a minimum distance of 50 mm must be kept between live parts of Ex e and Ex i circuits. The use of Ex e/Ex i separators is a space-saving solution when Ex e and Ex i terminal blocks are mounted on a common DIN-rail.

