
Data Sheet | Item Number: 770-514/023-000

Strain relief housing; 4-pole; for 2 cables; 5.0 ... 9.0 mm; 55 mm; white

https://www.wago.com/770-514/023-000





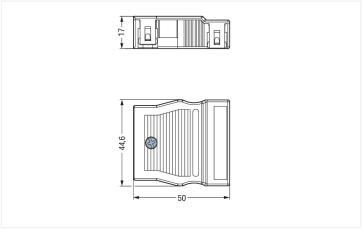

Dimensions in mm

Strain relief housing WINSTA® MIDI 4-pole

Realize your installation project effortlessly: The strain relief housing from the WINSTA® MIDI product line is the solution for quick, straightforward installation. You can rely on the level of quality of WINSTA® components from WAGO for your electrical installation accessories too. The WINSTA® MIDI Pluggable Connection System with Push-in CAGE CLAMP® spring pressure connection technology facilitates precise electrification. Thanks to the included test slot, it is possible to check connections even when they are plugged in. That saves time and reduces installation labor and expense. The strip length is 55 mm.

Push-in CAGE CLAMP® spring pressure connection technology – pluggable installation instead of laborious screw connections!

The WINSTA® Pluggable Connection System allows pluggable electrical installation. This saves time, lowers costs, and reduces the need for servicing. Take advantage of the pluggable version of our maintenance-free spring pressure connection technology too! Plan your installation with with protection against mismating from WAGO.

- for automation controllers
- · rapid, structured electrical installation

Connection data	
Connection 1	
Pole number	4
Connectable sheathed cable diameter	5 9 mm
Strip length (outer insulation)	55 mm

Physical data		
Width	44.6 mm / 1.756 inches	
Height	17 mm / 0.669 inches	
Depth	50 mm / 1.969 inches	

Data Sheet | Item Number: 770-514/023-000 https://www.wago.com/770-514/023-000



Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Insulation material	Polyamide (PA66)
Flammability class per UL94	V0
Fire load	0.349 MJ
Weight	12.9 g

Environmental requirements	
Processing temperature	-5 +40 °C
Continuous operating temperature	-35 +85 °C
Note on continuous operating temperature	Insulating parts for temperatures ≤ 105 °C

Commercial data	
eCl@ss 10.0	27-44-06-92
eCl@ss 9.0	27-44-06-92
ETIM 8.0	EC002863
ETIM 7.0	EC002863
PU (SPU)	25 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454378189
Customs tariff number	85389099990

Environmental Product Compliance	
RoHS Compliance Status	Compliant,No Exemption

۸n	nrovo	10/0	`ortifi	catoc
Αþ	prova	115 / C	,ei uii	cates

General approvals



Inc.

Approval	Standard	Certificate Name
cURus	UL 1977	E45171
Underwritere Laboratories		

Approvals for marine applications



Approval	Standard	Certificate Name
LR Lloyds Register	IEC 61984	LR22429487TA


Data Sheet | Item Number: 770-514/023-000

https://www.wago.com/770-514/023-000



Downloads Environmental Product Compliance Compliance Search Environmental Product Compliance 770-514/023-000

Documentation			
Bid Text			
770-514/023-000	19.02.2019	xml 2.74 KB	<u>↓</u>
770-514/023-000	12.03.2015	doc 23.50 KB	\downarrow

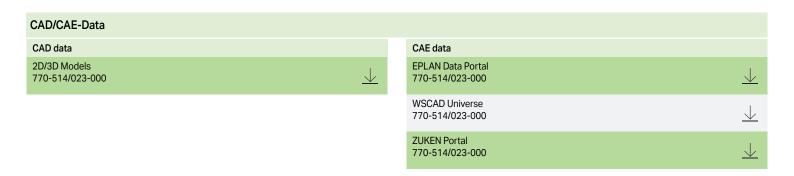

1 Compatible Products 1.1 Optional Accessories 1.1.1 Marking 1.1.1.1 Marking strip

Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

Subject to changes. Please also observe the further product documentation!