


Data Sheet | Item Number: 294-4035

Lighting connector; push-button, external; without ground contact; DA+ DA- L PE N;
5-pole; Lighting side: for solid conductors; Inst. side: for all conductor types; max.
2.5 mm²; Surrounding air temperature: max 85°C (T85); 2,50 mm²; white

<https://www.wago.com/294-4035>



Color: white

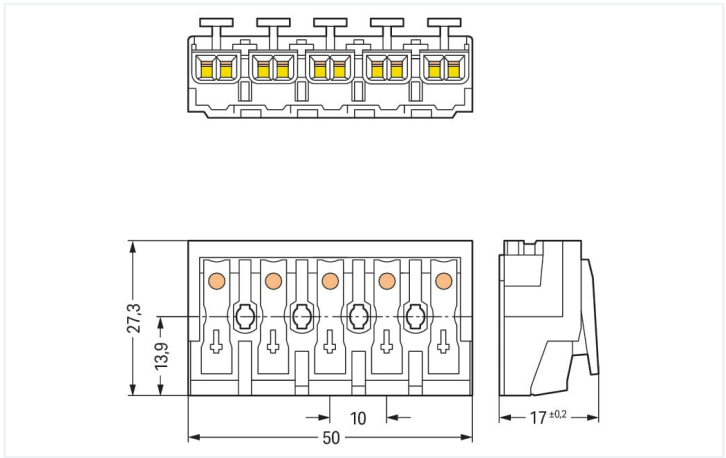

Dimensions in mm

- External connection of solid, stranded and fine-stranded conductors
- Universal conductor termination (AWG, metric)
- Third contact located at the bottom of internal connection end
- Strain relief plate can be retrofitted

Electrical data						
Ratings per		IEC/EN 60998-1			Ratings per	
		IEC/EN 60998-2-2				
Overvoltage category	III	III	II	Overvoltage category	III	III
Pollution degree	3	2	2	Pollution degree	3	2
Nominal voltage	-	-	500 V	Nominal voltage	-	-
Rated surge voltage	-	-	4 kV	Rated surge voltage	-	-
Rated current	-	-	24 A	Rated current	-	-

Connection data		Connection 1	
Connection points	25	Connection type 1	External 1
Total number of potentials	5	Connection technology	Push-in CAGE CLAMP®
Number of connection types	4	Number of connection points	2
PE function	without PE contact	Actuation type	Push-button
		Connectable conductor materials	Copper
		Solid conductor	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Solid conductor; push-in termination	0.5 ... 2.5 mm² / 18 ... 12 AWG
		Stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor	0.5 ... 2.5 mm² / 18 ... 14 AWG
		Fine-stranded conductor; with insulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with uninsulated ferrule	0.5 ... 1.5 mm² / 18 ... 16 AWG
		Fine-stranded conductor; with ferrule; push-in termination	0.5 mm² / 18 AWG
		Strip length	8 ... 9 mm / 0.31 ... 0.35 inches
		Pole number	5
		Wiring direction	Side-entry wiring



Connection 2	
Connection type 2	Internal 2
Connection technology 2	PUSH WIRE®
Number of connection points 2	1
Actuation type 2	Push-in
Solid conductor 2	0.5 ... 2.5 mm² / 18 ... 14 AWG
Fine-stranded conductor; with insulated ferrule 2	0.5 ... 1 mm² / 18 ... 16 AWG
Fine-stranded conductor; with uninsulated ferrule 2	0.5 ... 1.5 mm² / 18 ... 14 AWG
Strip length 2	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 4	
Connection type 4	Internal 4
Connection technology 4	PUSH WIRE®
Number of connection points 4	1
Actuation type 4	Push-in
Solid conductor 4	0.5 ... 0.75 mm² / 18 AWG
Strip length 4	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Pin spacing		10 mm / 0.394 inches
Width		50 mm / 1.969 inches
Height from the surface		17 mm / 0.669 inches
Depth		27.3 mm / 1.075 inches

Mechanical data	
Marking	DA+ DA- L N
Mounting type	without snap-in mounting feet

Material data	
Note (material data)	Information on material specifications can be found here
Color	white
Material group	IIIa
Insulation material	Polycarbonate (PC)
Flammability class per UL94	V0
Clamping spring material	Chrome-nickel spring steel (CrNi)
Contact material	Electrolytic copper (E _{Cu})
Contact plating	Tin
Fire load	0.301 MJ
Halogen-free	Yes
Weight	15.2 g



Environmental requirements	
Temperature stability	120 °C
T marking	T85

Commercial data	
Product Group	8 (Misc. Chassis Mount Blocks)
eCl@ss 10.0	27-14-11-06
eCl@ss 9.0	27-14-11-06
ETIM 8.0	EC001284
ETIM 7.0	EC001284
PU (SPU)	250 pcs
Packaging type	Foil
Country of origin	CH
GTIN	4050821097747
Customs tariff number	85369010000

Environmental Product Compliance	
CAS-No.	131651-65-5 144317-44-2 220133-51-7 220689-12-3 25628-08-4 29420-49-3 375-73-5 503155-89-3 507453-86-3 68259-10-9
REACH Candidate List Substance	Perfluorobutane sulfonic acid (PFBS) and its salts
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	c1f13874-1cd1-42e6-8899-6698a3507208
SCIP notification number (Belgium)	692d6a3d-659a-46d1-9125-4cede034225d
SCIP notification number (Bulgaria)	57256c89-0a18-422e-9341-5d24592c93f9
SCIP notification number (Czech Republic)	58aa0343-72ab-4eea-81d3-a5ef30a7776b
SCIP notification number (Denmark)	0f29f624-4727-4c95-be90-e0817f875b8e
SCIP notification number (Finland)	c3e0da23-526d-4a48-87c3-7cdc2f7de523
SCIP notification number (France)	919a36dc-1231-4f1f-889a-fdca038700ff
SCIP notification number (Germany)	3bd8ca93-db13-4fa2-8851-fdb90ba5104c
SCIP notification number (Hungary)	03e1486c-faef-4613-a856-7970496e18b7
SCIP notification number (Italy)	7eb8ca11-8e37-41cc-8304-10f88f461c08
SCIP notification number (Netherlands)	aae3c4ae-14b1-4319-9c7c-d2e41d2952dc
SCIP notification number (Poland)	1582a7d8-8224-4f49-88a5-6672b2d8dd3c
SCIP notification number (Romania)	74d5b8e7-30a0-4568-ab40-897c54a2b883
SCIP notification number (Sweden)	a313da52-3046-493d-aa91-ee5f67d25f93



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
ENEC 05 DEKRA Certification B.V.	EN 60998	2128791.01

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-
UK-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 294-4035



Documentation

Additional Information

Technical Section	pdf 2240.62 KB	
-------------------	-------------------	--

Bid Text

294-4035	19.02.2019	xml 5.58 KB	
294-4035	13.06.2017	doc 28.50 KB	

CAD/CAE-Data

CAD data

2D/3D Models 294-4035	
--------------------------	--

CAE data

WSCAD Universe 294-4035	
ZUKEN Portal 294-4035	

1 Compatible Products

1.1 Optional Accessories

1.1.1 Strain relief

1.1.1.1 Strain relief



[Item No.: 294-370](#)
Strain relief; for 294 Series; with snap-in
mounting feet; white



[Item No.: 294-375](#)
Strain relief; for 294 Series; without snap-
in mounting feet; white

1.1.1.2 Strain relief plate



Item No.: 294-364

Strain relief plate; for 294 Series; for multi-core cables; 3- to 5-pole; with secured clamp; white



Item No.: 294-384

Strain relief plate; for 294 Series; for single strands; 3- to 5-pole; with secured clamp; white

1.1.2 Tool

1.1.2.2 Operating tool




Item No.: 206-294


Disconnection tool; green

Installation Notes


Installation



5-pole – without ground contact




Mounting hole for screw
Notice: The maximum thread diameter for self-tapping screws is 3 mm.




Hole for screw mount
Notice: The maximum thread diameter for self-tapping screws is 3 mm.

Conductor termination



EUROPE
1 x 0.5 ... 2.5 mm ² "s"
1 x 0.5 ... 1.5 mm ² "s"
1 x 0.5 ... 0.75 mm ² "s"
AMERICA
1 x AWG 18 ... 14 "s"
1 x AWG 18 ... 16 "s"
1 x AWG 18 "s"
JAPAN
1 x 0.8 ... 1.6 mm diam. "s"
1 x 0.8 ... 1 mm diam. "s"
1 x 0.8 mm diam. "s"

EUROPE
2 x 0.5 ... 2.5 mm ² "s, str, f-str"
AMERICA
2 x AWG 18 ... 12 "s"
2 x AWG 18 ... 14 "s, f-str"
JAPAN
2 x 0.8 ... 2 mm diam. "s"
2 x 0.5 ... 2 mm ² str, f-str"



Internal connection:
PUSH WIRE® for internal wiring with solid conductors

External connection:
Push-in CAGE CLAMP® for field-wiring with all conductor types



Terminating five conductors per pole – solid and fine-stranded.

