
Strain relief housing; 7-pole; with locking clip; for 1 cable; 8.0 ... 15.0 mm; 55 mm; black




https://www.wago.com/770-507/047-000



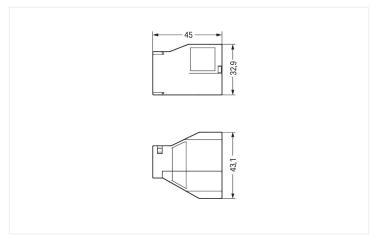

Color: ■ black

Dimensions in mm

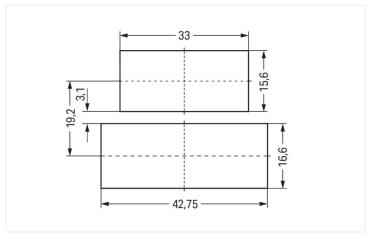

Dimensions in mm

#### Strain relief housing WINSTA® MIDI 7-pole

Implement the electrical installation easily and quickly: The strain relief housing from the WINSTA® MIDI product line is the solution for quick, straightforward installation. With WAGO, you benefit from a large selection of accessories for the WINSTA® product line. WINSTA® MIDI with Push-in CAGE CLAMP® spring pressure connection technology is found in a broad range of individual products you can use for quick, easy and maximally flexible electrical installation. A range up to 55 mm can be used for the strip length.

WINSTA® MIDI solutions for your electrical installation - protected against mismating and maintenance-free

WINSTA® is the pluggable connection system that is ideally tailored to the strict requirements of electrical installation. It offers fast, secure and, above all, error-free installation of components and cables. Choose durability and quality – with protection against mismating from WAGO makes the installation of electrical components significantly easier.

- · for automation controllers
- quick replacement of defective units during ongoing operation

https://www.wago.com/770-507/047-000



#### Connection data

#### Connection 1

Pole number 7

 $\begin{tabular}{ll} Connectable sheathed cable diameter & 8 \dots 15 mm \\ Strip length (outer insulation) & 55 mm \\ \end{tabular}$ 

Physical data

 Width
 43.1 mm / 1.697 inches

 Height
 32.9 mm / 1.295 inches

 Depth
 45 mm / 1.772 inches

Material data

Note (material data)

<a href="https://www.wago.com/us/material-specifications">Information on material

specifications can be found here</a>

Color black

Insulation material Polyamide (PA66)

Flammability class per UL94 V0

Fire load 0.517 MJ

Weight 12.9 g

**Environmental requirements** 

Processing temperature -5 ... +40 °C

Continuous operating temperature -35 ... +85 °C

Note on continuous operating temperature Insulating parts for temperatures  $\leq$  105 °C

Commercial data

27-44-06-92 eCl@ss 10.0 27-44-06-92 eCl@ss 9.0 **ETIM 8.0** EC002863 ETIM 7.0 EC002863 PU (SPU) 200 pcs Packaging type Box Country of origin DE **GTIN** 4045454554453 Customs tariff number 39269097900

**Environmental Product Compliance** 

RoHS Compliance Status Compliant,No Exemption

https://www.wago.com/770-507/047-000



### Approvals / Certificates

### Approvals for marine applications



Approval

Standard IEC 61984

LR Lloyds Register

### Certificate Name LR22429487TA

### Downloads

#### **Environmental Product Compliance**

#### Compliance Search

Environmental Product Compliance 770-507/047-000



#### Documentation

Bid Text			
770-507/047-000	19.02.2019	xml 2.82 KB	<u>↓</u>
770-507/047-000	06.01.2015	doc 23.50 KB	$\overline{\downarrow}$

#### CAD/CAE-Data

CAE data
WSCAD Universe
770-507/047-000



## 1 Compatible Products

### 1.1 Optional Accessories

#### 1.1.1 Marking

## 1.1.1.1 Marking strip



Item No.: 210-333

Marking strips; as a DIN A4 sheet; Strip width 6 mm; Strip length 182 mm; plain; Self-adhesive; white

https://www.wago.com/770-507/047-000



#### **Installation Notes**

## Application









Snap-on type strain relief housings for:

- 3-pole socket or plug
- 4-pole socket or plug

"Flying leads"

(NOTICE: Only use locking levers on upper position!)

"Flying leads"

Subject to changes. Please also observe the further product documentation!

Page 4/4 Version 16.11.2023